

ATC GROUPS
VOLTAGE
TRANSFORMER
THE BEST INDUSTRIAL EQUIPMENT

<http://www.atcgroups.com/>

<https://www.google.com/maps>

AIRTAC ENTERPRISES PHILS. CO. LTD. CORP

OFFICE ADDRESS: UNIT 57 & 58 CENTURY COMMERCIAL COMPLEX V
PALIPARAN ROAD SALAWAG DASMARIÑAS, CAVITE

TELEPHONE NO. : (046)430-0027 (046)430-0034 (046)430-0080
(046)884-6468 (046)884-6252 (046)884-1155
(046)884-1166 (046)884-6296 (046)686-2217
(046)686-2204 (028) 463-1269 (028)463-1270
(028)463-1279

EMAIL ADDRESS: AIRTAC.ATCGROUP@YAHOO.COM

WWW.ATCGROUPS.COM

BK series control transformer



适用范围 Sphere of application

BK系列控制变压器适用50~60Hz电压至500V的电路中，通常用作机床和机械设备中一般电器的控制电源，或局部照明灯及指示灯的电源之用。

BK series control transformer applicable to 50-60HZ voltage and 500V circuit, usually used for the general electric power of control of the machines and mechanical equipments, or as the power supply of local lighting and the indicator light.

型号及其含义 The model and meanings



使用环境 Working condition

1. 周围空气温度-5℃至+40℃，24小时的平均值不超过+35℃；
2. 安装地点海拔不超过2000m；
3. 大气相对湿度在周围空气温度为+40℃时不超过50%，在较低温度下可以有较高的相对湿度，最湿月的平均最大湿度为90%，同时该月的月平均最低温度为+25℃，并考虑到因温度变化发生在产品表面的凝露。

1. The ambient air temperature should keep from -5℃ to +40℃, and average does not exceed +35℃ of 24 hours.
2. Installation site altitude does not exceed 2000m.
3. The atmospheric relative humidity less than 50% in the ambient air temperature is +40℃. At a lower temperature can have a higher relative humidity. The most wet months, the average maximum humidity of 90% while the monthly average minimum temperature is 25℃, and taking into account occur in the products surface of the Gel due to temperature changes.


BK series control transformer

结构特点 Structural features

BK系列控制变压器是经过多年进一步吸收国内外同类产品的优点，采用先进工艺和严谨设计进行制造，并优选国外先进方法的接线端子，具有性能优良、工作可靠、耗能低、体积小、接线安全、防护等级高、适用性广等特点。在额定负载下能长期工作，是一种理想的变压电源。

BK series control transformer is through further absorbs the advantages of similar products at home and abroad for many years. Using advanced technology and rigorous design to manufacturing it optimizing advanced terminals of the foreign. With the features of excellent performance, Reliable operation, low energy consumption, small size, wiring security, protection level high, wide applicability and so on it can work for a long time under the rated load and is a kind of ideal transformer power supply.


外形及安装尺寸 Shape and mounting dimension

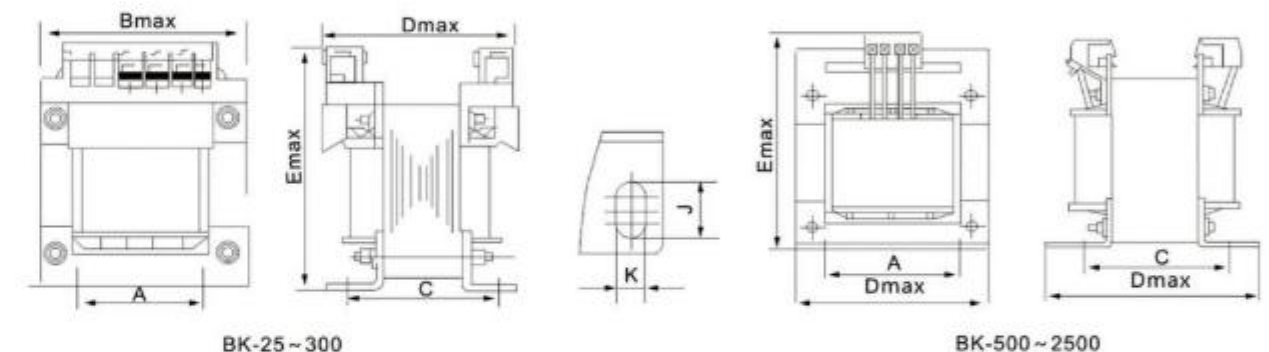

项目Item	安装尺寸 Installation dimension		外形尺寸 Shape dimension			安装孔尺寸 Installation hole size
尺寸Dimension	A	C	Bmax	Dmax	Emax	KxJ
型号Model						
BK-25-50	56±0.2	50±0.5	78	68	87	4.8x9
BK-100	64±0.2	62±0.5	84	82	94	4.8x9
BK-150	84±0.2	72±0.5	96	92	106	5.8x11
BK-200	84±0.2	86±0.5	96	105	106	5.8x11
BK-250	84±0.2	91±0.5	96	108	106	5.8x11
BK-300	90±0.2	90±0.5	120	117	114	7x13
BK-500	110±0.2	95±0.5	132	124	124	7x13
BK-800	123±0.2	100±0.5	150	134	142	7x13
BK-1000	123±0.2	111±0.5	150	153	142	7x13
BK-1500	140±0.2	122±0.5	180	147	167	8x13
BK-2000	140±0.2	142±0.5	180	167	167	8x13
BK-3000	140±0.2	152±0.5	180	187	167	8x13

产品容量（功率）、电压可以根据用户要求订做。
产品尺寸仅供参考，请以实物为准。

JBK1、2、3、4 series machine tool control transformer

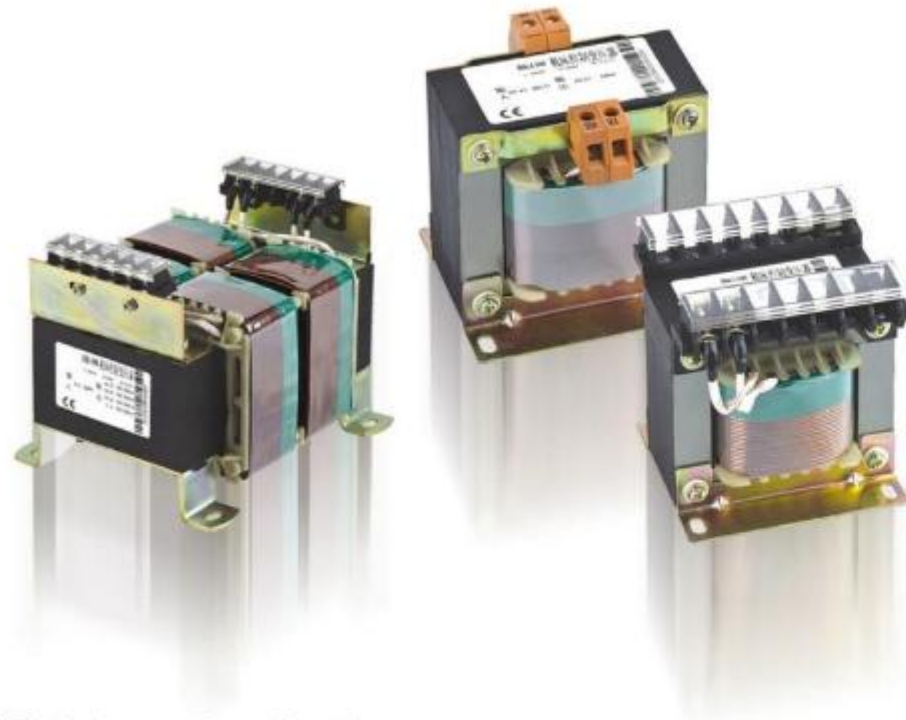

适用范围 Sphere of application

JBK系列机床控制变压器用于交流50~60Hz,输入电压不超过660V的电路中,作为各类机床、机械设备等一般电器的控制电源、局部照明及指示灯的电源。

本系列变压器是其它控制器更新换代的产品,采用进口材料和先进工艺进行制造,具有工作可靠、耗能低、体积小、接线安全、适用性广等特点。

JBK series machines control transformers are used for AC 50-60Hz,the input voltage not exceeding 660V circuit,as general electrical equipments'control power supply, local lighting and the power supply of indicator light of all kinds of machines, mechanical equipments such as general electric.
These series of transformers are other controller replacement products.they use imported materialsand advanced technology to manufacture. and with working reliable,low energy consumption,Small size. wiring security,wide applicability and soon on.

型号及其含义 The model and meanings





JBK1、2、3、4 series machine tool control transformer

外形及安装尺寸 Shape and mounting dimension

JBK1、2、3、4系列产品的外形安装尺寸

型号Model	安装尺寸 Installation dimension		外形尺寸 Shape dimension			安装孔尺寸 Installation hole size
	A	C	Bmax	Dmax	Emax	
JBK1、2、3、4-40	56±0.5	51±2	78	70	80	4.8x9
JBK1、2、3、4-63	56±0.5	51±2	78	70	86	4.8x9
JBK1、2、3、4-100	64±0.5	67±2	85	85	93	4.8x9
JBK1、2、3、4-160	84±0.5	72±2	96	90	103	5.8x11
JBK1、2、3、4-250	84±0.5	86±2	96	105	103	5.8x11
JBK1、2、3、4-400	90±0.5	90±2	120	113	123	7x13
JBK1、2、3、4-630	122±0.5	86±2	150	118	145	7x13
JBK1、2、3、4-800	122±0.5	100±2	150	128	145	7x13
JBK1、2、3、4-1000	127.5±2	152±2	155	205	145	7x12卧式
JBK1、2、3、4-1600	140±2	176±2	180	230	160	7x12卧式
JBK1、2、3、4-2500	173±2	200±2	205	260	175	7x12卧式

产品容量(功率)、电压可以根据用户要求订做。产品尺寸仅供参考,请以实物为准。

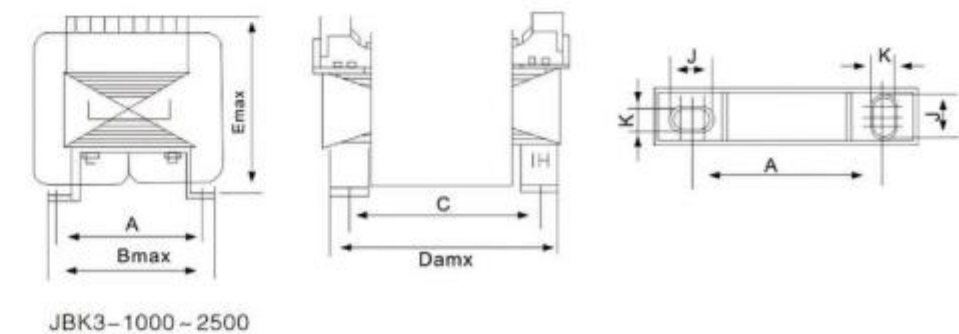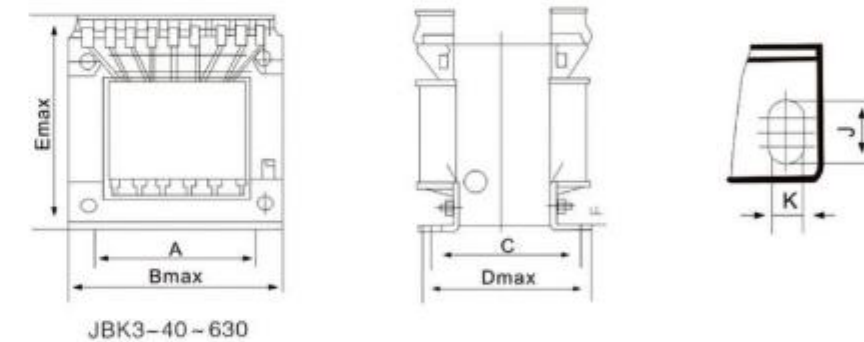

JBK5series machine tool control transformer



适用范围 Sphere of application

JBK5系列机床控制变压器是我公司引进德国最新型变压器系列，在国内JBK3系列机床控制变压器基础上，经过多年来进一步吸收国外同类产品，并优选国外先进方法的接线端子结构，将端子与骨架合在一起，使防护等级提高，防止偶然触及电路，采用国内IT冷压接线端子，接线方式可以使接线密集程度提高。

变压器800AV及以下1000VA、1600VA立式结构的硅钢片与硅钢片之间连接、硅钢片与底板连接均采用气体保护氩弧焊，形成一个整体，简洁明了，尤其是底板一次性成型，安装尺寸较JBK3系列更为准确，而采用优质防蚀合金材料，大大提高了接地性能的可靠性，全面提高了产品质量，该产品符合VDE0550、IEC204-1、IEC439、JB/T5555、GB5226等有关国际、国家标准，并荣获欧共体“CE”认证。可与国外产品互换使用。

JBK5系列机床控制变压器适用于交流50-60Hz，输入电压不超过500V、输出额定电压不超过220V，作为各行各业的机械设备、一般电器控制电源和工作、信号灯的电源之用。

JBK series machines control transformer are my company to introduce newest transformer series from Germany, on the basis of domestic JBK3 series machines control transformer, after many years to further absorption of similar foreign products, and preference choose the foreign advanced methods of terminal structure, use the terminal and the skeleton to together, improved the degree of protection, and prevent accidental touch circuit, and using the domestic IT cold-press terminal blocks, wiring way allow the connection intensity increased.

型号及其含义 The model and meanings



JBK5series machine tool control transformer


主要技术参数 Main technical parameters

型号 Model	额定容量 Rated capacity (VA)	效率 Power (%)	负载下的输出电压 Output voltage under loading		空载下的输出电压 Output voltage under loading		额定输入电压 Rated input voltage(V)	额定输出电压 Rated output voltage(V)
			信号绕组(%) Signal winding	控制绕组(%) Control winding	信号绕组(%) Signal winding	控制绕组(%) Control winding		
JBK5-40	40	80	$6 \geq U_m > 5$ $12 \geq U_m > 10$	95%~105% UH	6或12	1.1U _m	Ac380 ±5%	Ac220 (127) 110 控制
JBK5-60	63	80						
JBK5-100	100	80						
JBK5-160	160	85						
JBK5-250	250	85						
JBK5-400	400	85						
JBK5-630	630	85						
JBK5-800	800	90	$6 \geq U_m > 4.5$ $12 \geq U_m > 9$				Ac220 ±5%	48 36 24 照明 或 控制
JBK5-1000	1000	90						
JBK5-1600	1600	90						
JBK5-2500	2500	90						12 6 信号

注：各绕组容量分配可按用户要求制造

Note: The winding capacity allocation can be manufactured in accordance with user requirements

外形及安装尺寸 Shape and mounting dimension

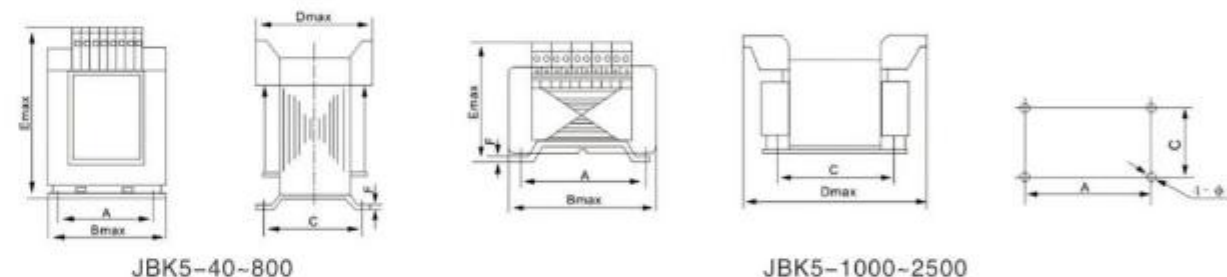

型号Model	安装孔距 Installing hole distance		外形尺寸 Shape dimension				安装孔 Installing hole
	A	C	Bmax	Dmax	Emax	Fmax	
JBK5-40	56±0.5	46±0.5	78	74	94	1.2	4.6
JBK5-63	56±0.5	46±0.5	78	74	94	1.2	4.6
JBK5-100	64±0.5	62±0.5	85	77	97	1.5	5.5
JBK5-160	84±0.5	73.5±0.5	96	94	109	1.5	5.8
JBK5-250	84±0.5	85±0.5	96	102	109	1.5	5.8
JBK5-400	90±0.5	85±0.5	120	102	129	2	5.8
JBK5-630	122±0.5	90±0.5	150	112	154	2	7
JBK5-800	122±0.5	105±0.5	150	132	154	2	7
JBK5-1000	127.5±0.2	152±0.2	155	207	152	3	7
JBK5-1600	140±0.2	176±0.2	180	232	152	3	7
JBK5-2500	173±0.2	200±0.23	205	262	169	4	7

产品容量（功率）、电压可以根据用户要求订做。产品尺寸仅供参考，请以实物为准。

SG, SBK, ZSG series three-phase dry-type(rectifier)transformers



SBK-5KVA



SBK-10KVA



SG-50KVA

概述 Summary


SG系列三相干式变压器广泛适用于交流50-60Hz, 输入、输出电压不超过500V的各种三相供电场合。产品的各种输入、输出电压的高低、联接组别、调节抽头的多少及位置(一般 $\pm 5\%$)、绕组容量的分配、次级单相绕组的配备、整流电路的运用、是否要求带外壳等, 均可根据用户的要求进行精心的设计与制造。

ZSG系列三相干式整流变压器供整流设备、整流后作充电、电压调节及直流电源之用。

SG series three-coherent-type transformers are widely use in AC 50-60Hz, and the various three-phase power supply of input and output voltage do not exceed 500V, Products can according to the requirement of the user to carefully design and manufacture of all kinds of input and output voltage, join groups, regulating the number and location of the tap (typically $\pm 5\%$), winding capacity allocation, single-phase secondary winding equipped with, the use of the rectifier circuit.

ZSG series three-coherent-type rectifier transformer is use for the rectifier devices, made after charging rectification voltage regulation and DC power supply.

型号及其含义 The model and meanings

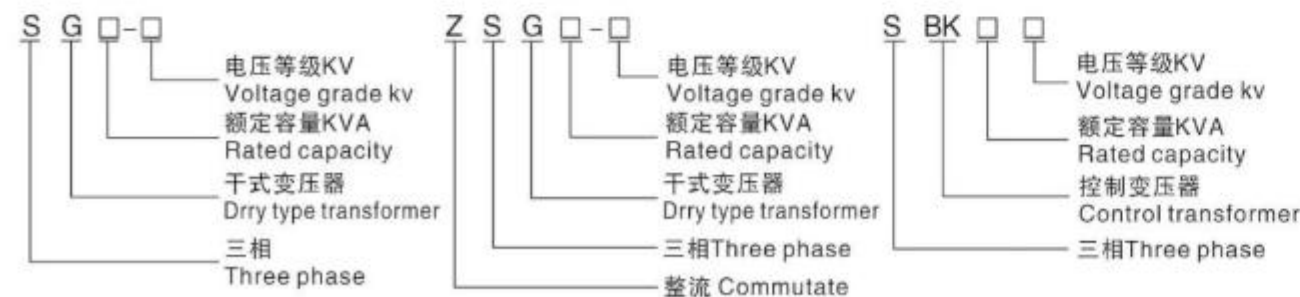

SG, SBK, ZSG series three-phase dry-type(rectifier)transformers

外形及安装尺寸 Shape and mounting dimension

SG、ZSG、SBK的外形及安装尺寸见下表及图1、图2、图3、
SG\ZSG\SBK appearance and installation dimensions in the table below and Figure1 .Figure2.Figure3

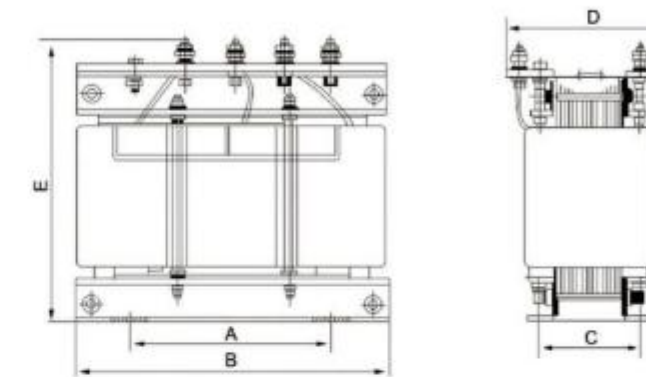


图1开启式 Picture I unlock type

型号Model	容量 Capacity (KVA)	输出电压(V) Voltage		联接组别号 Coupling group tab	外形尺寸 Sphape dimension(mm)						安装尺寸 Mounting dimension				KxJ
		输入 Input	输出 Output		开启式 Unlock type			防护式 Defend type			开启式 Unlock type		防护式 Defend type		
					Bmax	Dmax	Emax	Bmax	Dmax	Emax	A±5	C±5	A±5	C±5	
SG、ZSG、SBK-0.5	0.15	660	380	Y/yno(Y/Yo) Y/d(Y/Δ) D/y(Δ/Y) D/y(Δ/Δ)	120	88	150	260	180	200	90	49			8x16
SG、ZSG、SBK-0.3	0.3				150	98	175	260	180	200	113	62			
SG、ZSG、SBK-0.5	0.5				180	108	200	260	200	260	136	68			
SG、ZSG、SBK-0.75	0.75				180	118	200	260	250	260	136	78			10x20
SG、ZSG、SBK-1	1				180	130	200	315	250	260	176	103			
SG、ZSG、SBK-1.5	1.5				228	136	240	355	290	280	176	115			
SG、ZSG、SBK-2	2				228	146	240	355	290	300	224	115			
SG、ZSG、SBK-2.5	2.5				264	154	270	370	290	280	221	121			
SG、ZSG、SBK-3	3				264	161	270	370	290	300	224	128	420	220	
SG、ZSG、SBK-4	4				264	168	270	510	400	550	224	131			
SG、ZSG、SBK-5	5				300	180	300	510	400	550	224	143	470	230	
SG、ZSG、SBK-10	10				360	204	360	560	450	600	316	171	580	240	
SG、ZSG、SBK-15	15				360	219	360	560	450	600	316	186	580	300	
SG、ZSG、SBK-20	20				420	214	420	560	450	600	356	175			
SG、ZSG、SBK-30	30				480	274	450	650	520	720	356	235			
SG、ZSG、SBK-40	40				540	294	500	650	520	720	356	255	870	350	
SG、ZSG、SBK-50	50				600	350	560	720	600	810	450	235			
SG、ZSG、SBK-60	60				600	450	560	720	600	810	450	255			
SG、ZSG、SBK-80	80				800	450	660	1000	810	960	550	255			
SG、ZSG、SBK-100	100				860	520	760	1000	810	960	550	255			

产品容量(功率)、电压可以根据用户要求订做。产品尺寸仅供参考, 请以实物为准。

SG, SBK, ZSG series three-phase dry-type(rectifier)transformers



SG-800KVA



SG-5KVA

注:

- 1、空格未注尺寸，按用户要求待定，所列尺寸供参考；输出电流大于300A的产品为特殊定做产品，产品尺寸会相应改变。
- 2、表中所列的额定输入、输出电压根据需要可以任意组合。
- 3、表中所列的电压和尺寸，可根据用户要求协商确定。

NOTE:

- 1.The space of have not note the size can be determined according to the requirements of customers'isted in the dimension only for reference; The products of output voltage is more than 300A are special products, product size will change accordingly.
- 2.Rated input and output voltage of the chart can be any combination according to the need.
- 3.The List voltage of the table and size can be negotiated according to user's requirements.


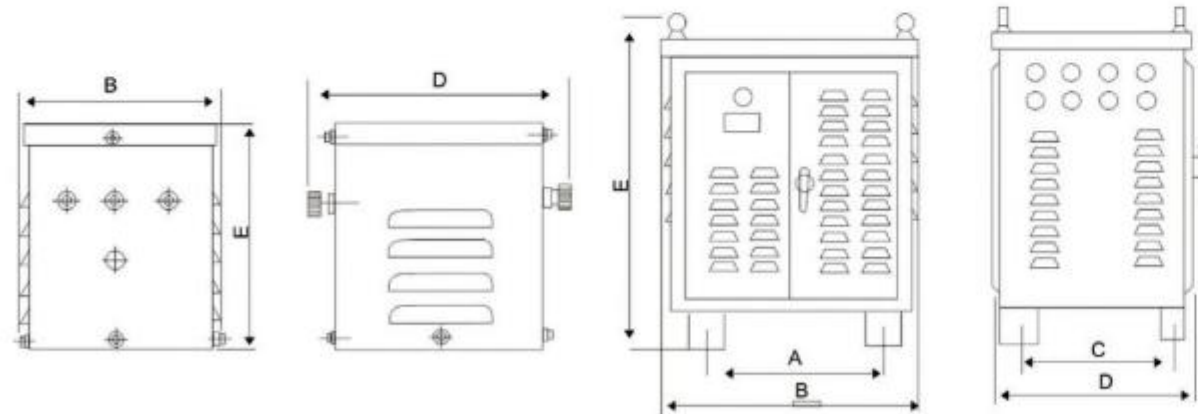


图2防护式 (0.3~3KVA)

图3防护式 (5~100KVA)

SG, SBK, ZSG series three-phase dry-type(rectifier)transformers

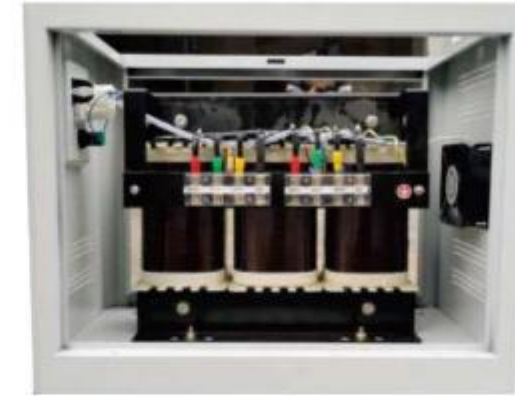

产品特点与优势

The characteristics and advantages

在SG, SBK, ZSG系列数控机床专用变压器，专用作机床控制电器或局部照明灯及指示灯的电源之用。先进的产品设计，严格控制产品的发热部位及最热点温升，线圈、引线采用铜导线，电流密度选取较低。产品具有较强的过负载能力和过电压能力，产品设计、制造充分考虑负载特性，从温升、绝缘性能及附件选择等各方面满足过载要求。节电效果明显，噪声低(<65dB)。结构简化，外形美观。

In the SG, SBK, ZSG series of CNC machine tools dedicated transformer, dedicated to the control of electrical machine tools or local lighting and lamp power supply. Advanced product design, strictly control the heating part of the product and the hottest temperature rise, coil, lead using copper wire, low current density selection. The product has strong over-load ability and over-voltage ability. The product design and manufacture fully consider the load characteristic, from the temperature rise, insulation performance and accessories selection to meet the overload requirements. The power saving effect is obvious, the noise is low (< 65DB). The structure is simplified and the appearance is beautiful.

JMB、DG、BZ(DM) series lighting control transformer



DG-7KVA



JMB-3KVA

■ 用途及结构特点 Usage and structural characteristics


JMB、DG、BZ型系列照明变压器适用于交流50Hz，电压500V及以下的电路中，作为机床及其它设备的局部照明灯电源。

JMB、DG系列变压器是由BK系列变压器和防护外壳构成，外壳两侧有供输入电源和负载接线用的接线柱，并有供接地用的接地螺钉；BZ型照明变压器是由BK-50、BK-100控制变压器、LS3-2型主令开关及防护外壳组成，在主令开关上装有熔断器，用以保护照明回路，电源从装有主令开关一端的防尘薄膜处引入，通过主令开关来接通和分断照明灯。

JMB\DG\BZ series lighting transformer for AC 50HZ, voltage 500V and below the circuit, machine tools and other equipment as a local lighting supply


JMB\DG series of transformers by the BK series of transformers and protective shell composition, shell on both sides have for the input supply and load wiring terminal used and are used for grounding the grounding screw. BZ lighting transformer is a BK-50, BK-100 control transformer, LS3-2-type main switch and the composition of the protective housing, in the main switch is equipped with a fuse for the protection of lighting circuits, power supply from the main switch is equipped with dust-proof membrane at one end of the introduction, through the main switch to connect and breaking lights.

■ 型号及其含义 The model and meanings

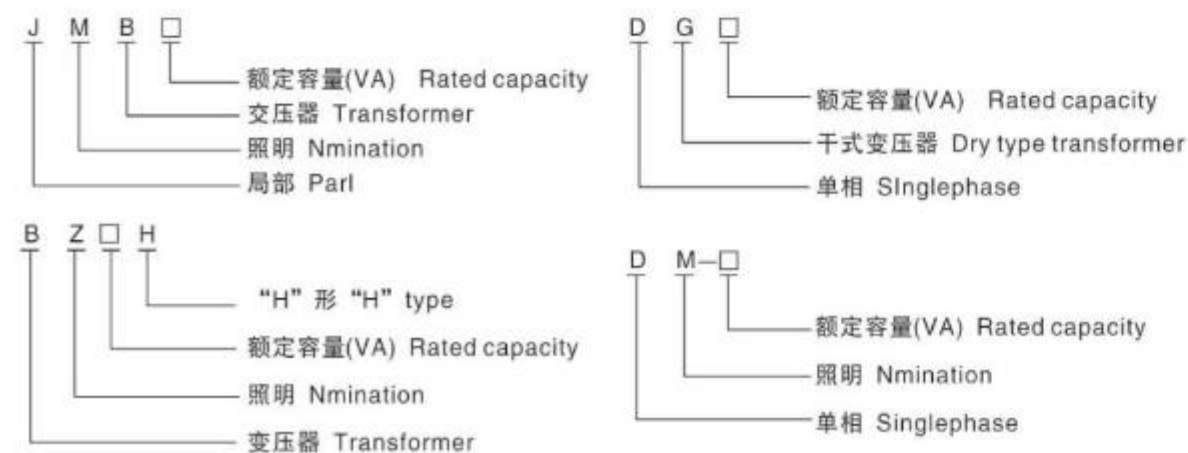

JMB、DG、BZ(DM) series lighting control transformer

■ 外形及安装尺寸 Shape and mounting dimension

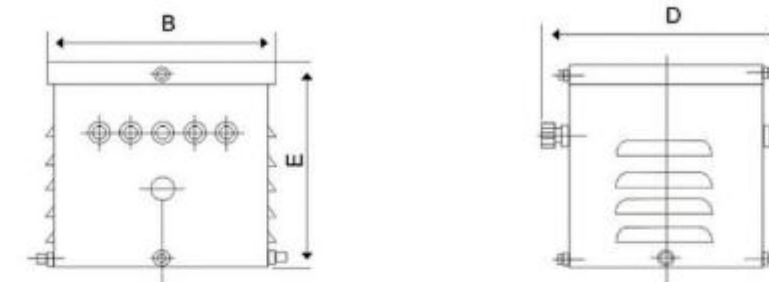

JMB(DG)系列产品的外形及安装尺寸见表1、图1

型号 Model	初级电压 Primary Voltage(V)	次级电压 Secondary Voltage(V)	外形尺寸 Shape dimension		
			B	D	E
JMB(DG)25VA	220、380或根据 用户需求而定	6、12、24、36 110、127、220、380 或根据用户需求而定	145	160	120
JMB(DG)50VA			145	165	120
JMB(DG)100VA			145	165	120
JMB(DG)150VA			165	155	130
JMB(DG)200VA			165	155	150
JMB(DG)250VA			175	200	150
JMB(DG)300VA			175	200	150
JMB(DG)400VA			205	230	170
JMB(DG)500VA			205	230	170
JMB(DG)700VA			220	285	180
JMB(DG)1000VA			220	285	180
JMB(DG)1500VA			260	320	220
JMB(DG)2000VA			260	320	220
JMB(DG)3000VA			260	360	240
JMB(DG)5000VA			365	350	280

产品容量（功率）、电压可以根据用户要求订做。产品尺寸仅供参考，请以实物为准。

BZ产品外形及安装尺寸见表2

型号 Model	额定容量 Capacity (VA)	初级电压 Primary Voltage(V)	次级电压 Secondary Voltage(V)	外形尺寸 Shape dimension	安装孔 Installing hole
				(BxDxE)	
BZ-50H	50	380或220	12、24、36	118x212x92	φ6.5
BZ-100H	100	380或220	12、24、36	118x212x104	φ6.5

产品容量（功率）、电压可以根据用户要求订做。产品尺寸仅供参考，请以实物为准。

KSG, QC series mine transformer BZ80 electric coal composite device transformer



KSGQC815型



KSGQC810型

用途说明 Instructions for use

本矿用变压器适用于交流50Hz, 电压等级为1140V及以下, 容量为500VA及以下, 它广泛用于矿用隔爆型磁力电器中的控制线路局部照明及信号设备的电源之用。

The mine transformers for AC 50Hz, voltage is 1140V and below grade and the capacity of 500VA and below, It is widely used in mine explosion-proof magnetic device in the control circuit via local lighting and signaling equipment, power supply purposes.

BZ80、ZZ8L0、KSGZ系列煤电钻综合装置变压器

BZ80\ZZ8L\KSGZ series electric coal drill composite device transformer



2.5KVA



4.0KVA



KSG-10KVA

QZB series autotransformer



QZB-45KVA



QZB-115KVA



适用范围 Sphere of application


QZB系列自耦变压器适用于交流50Hz, 额定电压380V, 功率14kW-300kW的三相鼠笼型感应电动机的不频繁降压启动, 以改善电动机启动时对输电网络的影响。

QZB series of auto-transformer for AC 50Hz, rated voltage 380V power 14kW-300kW three-phase squirrel-cage, Induction motor is not frequent blood pressure start, to improve the motor starting time of the transmission network.

型号及其含义 The model and meanings



外形及安装尺寸 Shape and mounting dimension

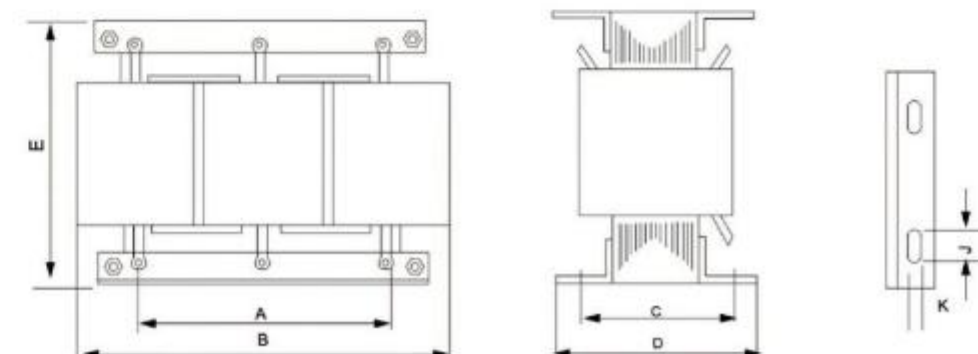

6-10KV环氧树脂浇注干式变压器



适用范围

具有广泛的使用领域，尤其适合适用在防火要求的场所，如矿井、油田、地铁、发电厂、学校、医院、商业中心、高层建筑及一切户内配置系统中。

型号含义




主要技术参数及外形安装尺寸

额定容量 (KVA)	电压组合			联接组	损耗(KW)		空载电流 (%)	短路阻抗 (%)	重量(KG)		安装尺寸(mm)				
	高压 (KV)	高压分接范围	低压 (KV)		空载	负载 (120°)			本体重量	带外重量	L	W	H	C1	C2
30	6	±5% ±2x2.5%	0.4	Yyn0 Dyn11	0.19	0.71	1.6	4.0	220	250	580	405	600	600	600
50					0.27	1.00	1.4		360	410	620	475	730	300	350
63					0.37	1.38	1.2		450	190	900	500	820	450	450
80					0.40	1.57	1.1		540	580	940	500	860	450	450
100					0.47	1.85	1.0		630	670	970	500	890	450	450
125					0.54	2.13	1.0		745	795	1060	650	930	550	550
160					0.62	2.52	0.9		850	910	1100	650	985	550	550
200					0.72	2.75	0.8		1010	1065	1140	760	1070	660	660
250					0.88	3.47	0.8	6.0	1235	1295	1170	760	1130	660	660
315					0.98	3.99	0.7		1370	1430	1260	760	1155	660	660
400					1.16	4.88	0.7		1565	1625	1300	760	1190	660	660
500					1.34	5.87	0.6		1855	1930	1370	760	1220	660	660
630					1.30	5.96	0.6		1800	1875	1370	760	1190	660	660
800					1.52	6.95	0.5		2140	2215	1440	760	1225	660	660
1000					1.77	8.13	0.45		2535	2620	1480	920	1330	820	820
1250					2.09	9.69	0.45		3100	3190	1580	920	1480	820	820
1600					2.45	11.73	0.45		3705	3830	1660	920	1550	820	820
2000					3.32	14.45	0.5		4230	4380	1720	920	1710	820	820
2500					4.00	17.17	0.4		5230	5380	1820	920	1780	1070	1070

产品容量 (功率)、电压可以根据用户要求订做。产品尺寸仅供参考，请以实物为准。

外形示意图

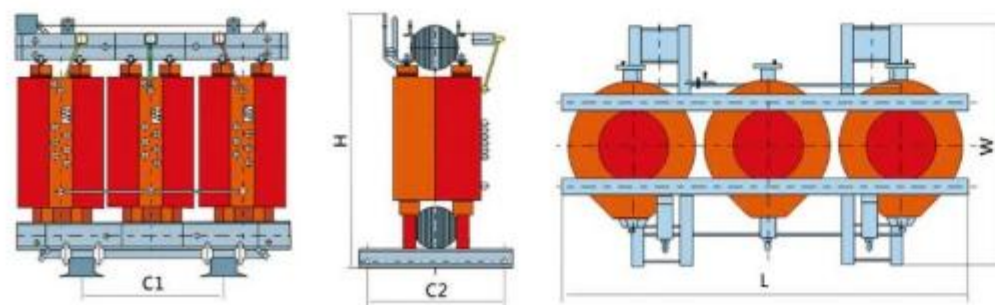

调压全密封油浸式电力变压器




适用范围

我公司生产的三相油浸式配电变压器，器身采用了新型绝缘结构，提高了抗短路能力；铁芯由高质量冷轧硅钢片制成；主压绕组均选用优质无氧铜线为材料，并采用多层圆筒式结构；所有紧固件均采用特殊防松处理。

产品具有高效，低损耗的特点，可节省大量的电耗和运行费用，社会效益显著，是国家推广的高新技术产品。

型号含义

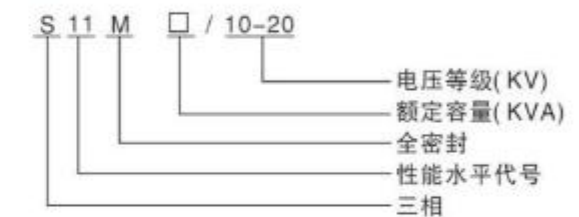

主要技术参数及外形安装尺寸

额定容量 (KVA)	电压组合			联接组	损耗(KW)		空载电流 (%)	短路阻抗 (%)	重量(KG)		安装尺寸(mm)				
	高压 (KV)	高压分接范围	低压 (KV)		空载	负载			油重	总量	L	W	H	C1	C2
30	20/10	±5x2.5% ±2x2.5%	0.4	Dyn11	0.09	0.66	2.1	5.5	260	640	980	870	1230	550	550
50					0.13	0.96	2.0		280	720	1010	900	1280	550	550
63					0.15	1.145	1.9		290	760	1030	920	1310	550	550
80					0.18	1.37	1.8		310	830	1050	930	1370	550	550
100					0.2	1.65	1.6		330	920	1070	970	1420	550	550
125					0.24	1.98	1.5		340	990	1090	990	1430	550	550
160					0.29	2.42	1.4		360	1090	1130	990	1470	660	660
200					0.33	2.86	1.3	6.0	390	1230	1150	1010	1520	660	660
250					0.4	3.35	1.2		430	1380	1200	1080	1570	660	660
315					0.48	4.01	1.1		470	1610	1210	1100	1620	660	660
400					0.57	4.73	1.0		500	1740	1420	900	1730	660	660
500					0.68	5.66	1.0		540	1960	1450	920	1790	820	820
630					0.81	6.82	0.9		560	2500	1550	1000	1950	820	820
800					0.98	8.25	0.8		740	2900	1700	1040	1990	820	820
1000					1.15	11.33	0.7		820	3310	1780	1130	2050	820	820
1250					1.35	13.2	0.7		890	3780	1880	1230	2100	820	820
1600					1.63	15.95	0.6		1000	4500	2040	1380	2260	820	820
2000					1.95	19.14	0.6		1060	5180	2350	1180	2600	1070	1070
2500					2.34	22.22	0.5		1130	5850	2450	1220	2720	1070	1070

产品容量 (功率)、电压可以根据用户要求订做。产品尺寸仅供参考，请以实物为准。

外形示意图

