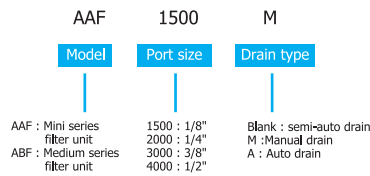



F.R.L. Combination (AAF ABF Series)

Ordering Code

Symbol

Specifications

Model No		AAF1500	AAF2000	ABF2000	ABF3000	ABF4000
Port size		1/8	1/4	1/4	3/8	1/2
Media		Air				
Maximum pressure	kgf/cm ²	9.50				
Fluid temperature	°C°F	+5 ~ +60 (+41 ~+140)				
Drain bowl capacity	CC.	15	15	60	60	60
Weight	g	140	140	330	330	330
Autodrain model		ADK6268				

F.R.L. Combination (AAR ABR Series)


Ordering Code

Symbol


New (NAR Series)


Specifications

Model No		AAR1500	NAR1500	AAR2000	NAR2000	ABR2000	ABR3000	ABR4000
Port size		1/8	1/8	1/4	1/4	1/4	3/8	1/2
Media		Air						
Pressure range	kgf/cm ²	0.50 ~ 8.50						
Maximum pressure	kgf/cm ²	(NAR Series 16.00) 9.50						
Fluid temperature	°C°F	+5 ~ +60 (+41 ~+140)						
Weight	g	200	200	200	200	230	230	230

F.R.L. Combination (AAL ABL Series)

Ordering Code

Symbol


New (NAL Series)


Specifications

Model No		AAL1500	NAL1500	AAL2000	NAL2000	ABL2000	ABL3000	ABL4000
Port size		1/8	1/8	1/4	1/4	1/4	3/8	1/2
Media		Air						
Maximum pressure	kgf/cm ²	9.50						
Fluid temperature	°C°F	+5 ~ +60 (+41 ~+140)						
Recommendable lubricant		ISO VG32 or Equivalent						
Oil bowl capacity	CC.	25	25	25	25	90	90	90
Weight	g	170	170	170	170	250	250	250