



Pilot Valve (A4A Series)



Ordering Code

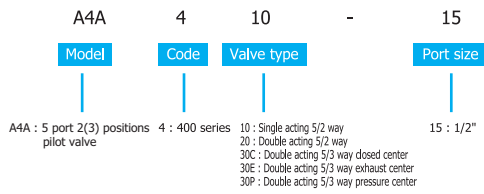

Symbol

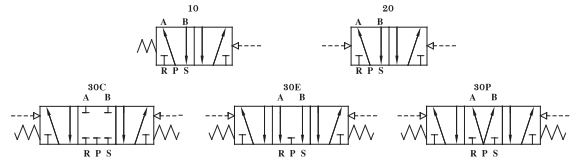

Specifications

Model NQ		A4A410-15	A4A420-15	A4A430C-15	A4A430E-15	A4A430P-15
Port size (In)	inch	1/2	1/2	1/2	1/2	1/2
Port size (Out)	inch	1/2	1/2	1/2	1/2	1/2
Port size (Exhaust)	inch	1/2	1/2	1/2	1/2	1/2
Orifice size	mm ² (CV)	50(2.79)	50(2.79)	30(1.68)	30(1.68)	30(1.68)
Valve type		10:5/2 way single pilot	20:5/2 way double pilots	30C:5/3 way closed center double pilots	30E:5/3 way exhaust center double pilots	30P:5/3 way pressure center double pilots
Media		Air				
Action type		Internal pilot				
Pressure range	kgf/cm ²	1.50~8.00				
Fluid temperature	°C (°F)	+5~+60(+41~+140)				
Maximum frequencies	cycle/sec	3				
Lubrication		Non-lubricated				
Material of body		Aluminum alloy				