

目录 (catalogue)


型 号 REFERENCE	描述 DESCRIPTION	页数 PAGE
01100	FERRULE FOR CHINA1-WIRE HOSE	2
01200	FERRULE FOR CHINA2-WIRE HOSE	2
01300	FERRULE FOR CHINA3-WIRE HOSE	3
01400	FERRULE FOR R17/20-24& "FFIT" 4 SPIRAL HOSE	3
00100	FERRULE FOR SAE 100R1AT/DIN20022 1ST HOSE	4
00110	FERRULE FOR SAE 100R1AT/DIN20022 1SN HOSE	4
00110-A	FERRULE FOR SAE 100R1AT/DIN20022 1SN HOSE	5
00200	FERRULE FOR SAE 100R2AT/DIN20022 2ST HOSE	5
00210	FERRULE FOR SAE 100R2AT/DIN20022 2SN HOSE	6
00310	FERRULE FOR SAE 100R2AT/DIN20022 2SN HOSE	6
00400	FERRULE FOR 4SP, 4SH/10-16, R12/06-16 HOSE	7
00401	FERRULE FOR R12/20-24 HOSE	7
00018	FERRULE FOR SAE 100R7 HOSE	8
00TFO	FERRULE FOR TEFLON HOSE	8
00500	FERRULE FOR SAE 100 R5 HOSE	9
00621	FERRULE FOR GB/T 10544 R13/SAE 100 R13/EN856 R13 HOSE	9
10311	O-RING METRIC MALE FLAT SEAT	14
20211 20211-T	METRIC FEMALE FLAT SEAT	15
20241 20241-T	45° METRIC FEMALE FLAT SEAT	16
20291 20291-T	90° METRIC FEMALE FLAT SEAT	17
10411	METRIC MALE 24° CONE SEAT L.T.	18
20411 20411-T	METRIC FEMALE 24° CONE O-RING L.T.	19
20411C	METRIC FEMALE MULTISEAL 24° CONE L.T.	20
20411C-T		
20441 20441-T	45° METRIC FEMALE 24° CONE L.T.	21
20491 20491-T	90° METRIC FEMALE 24° CONE O-RING L.T.	22
20491C	90° METRIC FEMALE 24° CONE MULTISEAL L.T.	23
20491C-T		23
10511	METRIC MALE 24° CONE SEAT H.T.	24
20511 20511-T	METRIC FEMALE 24° CONE O-RING H.T.	25
20511C	METRIC FEMALE 24° MULTISEAL H.T.	26
20511C-T		
20541 20541-T	45° METRIC FEMALE 24° CONE O-RING H.T.	27
20541C	45° METRIC FEMALE 24° MULTISEAL H.T.	28
20541C-T		
20591 20591-T	90° METRIC FEMALE 24° CONE O-RING H.T.	29
20591C	90° METRIC FEMALE 24° MULTISEAL H.T.	30
20591C-T		

10611	METRIC MALE DOUBLE USE FOR 60°	31
20611 20611-T	METRIC FEMALE 60° CONE	32
20691 20691-T	90° METRIC FEMALE 60° CONE	33
10711	METRIC MALE 74° CONE	34
20711 20711-T	METRIC FEMALE 74° CONE SEAT	35
20741	45° METRIC FEMALE 74° CONE SEAT	36
20791	90° METRIC FEMALE 74° CONE SEAT	37
10811L	METRIC MALE 90° CONE	38
20111 20111-T	METRIC FEMALE MULTISEAL	39
20141 20141-T	45° METRIC FEMALE MULTISEAL	40
20191 20191-T	90° METRIC FEMALE MULTISEAL	41
50011	METRIC STANDPIPE STRAIGHT	42
50091	90° METRIC STANDPIPE STRAIGHT	43
51011	BSP STANDARD PIPE	44
51091	90° BSP STANDARD PIPE	45
NS NL	RETAINING NUT L.T.	46
12211	BSP MALE O-RING SEAL	47
12611	BSP MALE 60° CONE SEAT	48
12611A	BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL	49
22611 22611-T	BSP FEMALE 60° CONE	50
22611-W		
22611D	BSP FEMALE 60° CONE DOUBLE HEXAGON	51
22611D-SM	BSP FEMALE 60° CONE DOUBLE HEXAGON	51
22641 22641-T	45° BSP FEMALE 60° CONE	52
22641-W		
22691 22691-T	90° BSP FEMALE 60° CONE	53
22691-W		
22691K	BSP FEMALE CONE DOUBLE HEXAGON	54
22111 22111-T	BSP FEMALE MULTISEAL	55
22111-W		
22141 22141-T	45° BSP FEMALE MULTISEAL	56
22141-W		
22191 22191-T	90° BSP FEMALE MULTISEAL	57
22191-W		
13011-SP	BSP MALE	58
14211	ORFS MALE O-RING SEAL	59
24211 24211-T	ORFS FEMALE FLAT SEAT	60
24211-W		
24291 24291-T	90° ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516	61
24291-W		
15611	NPT MALE	62
16011	SAE O-RING SEAL	63
16711L	JIC 74° MALE CONE SEAL LONGER	64
16711	JIC 74° MALE CONE SEAL	65

26711	JIC FEMALE 74° CONE SEAT	66
26741 26741W	45° JIC FEMALE 74° CONE SEAT	67
26791 26791W	90° JIC FEMALE 74° CONE SEAT	68
26791K	90° JIC COMPACT FEMALE 74° CONE SEAT	69
17811	SAE MALE 90° CONE	69
27811	SAE FEMALE 90° CONE SEAT	70
21611	NPSM FEMALE 60° CONE	71
87312	SAE FLANGE 3000 PSI	72
87342	45° SAE FLANGE 3000 PSI	73
87392	90° SAE FLANGE 3000 PSI	74
87392-H	90° SAE FLANGE SPECIAL HEIGHT	75
HALF	FL 3000 PSI HALF FLANGE	76
FLANGE	FS 6000 PSI HALF FLANGE	76
87612	SAE FLANGE 6000 PSI	77
87642	45° SAE FLANGE 6000 PSI	78
87692	90° SAE FLANGE 6000 PSI	79
18611	JIS METRIC MALE 60° CONE SEAT	80
28611 28611W	JIS METRIC FEMALE 60° CONE SEAT	81
28691 286912	90° JIS METRIC FEMALE 60° CONE SEAT	82
19611	JIS GAS FEMALE 60° CONE SEAT	83
29611 29611W	JIS GAS FEMALE 60° CONE SEAT	83
29691 29691W	90° JIS GAS FEMALE 60° CONE SEAT	84
88111	JIS FLANGE	85
88141	45° JIS FLANGE	85
88191	90° JIS FLANGE	86
20011-ST	METRIC FEMALE WATERWASH INSERTS 20011-ST	86
70011	METRIC BANJO	87
700M	METRIC BOLT	88
72011	BSP BANJO	89
720B	BSP BOLT	90
90011	DOUBLE CONNECTOR	90
90012	DOUBLE CONNECTOR	91

型号索引 (INDEX)


					
01120	01200	01300	01400	00100	00110
					
00110-A	00200	00310	00310	00400	00400
					
00010	00100	00000	00001		



01100

国产一层编织胶管套筒
FERRULE FOR CHINA1-WIRE HOSE


代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
01100-03	5	03		28	
01100-04	6	04		30	
01100-05	8	05		32	
01100-06	10	06		32	
01100-08	12	08		34	
01100-10	16	10		39	
01100-12	20	12		43	
01100-14	22	14		43	
01100-16	25	16		50	
01100-20	32	20		59	
01100-24	40	24		74	
01100-32	50	32		78	



01200

国产二层编织胶管套筒
FERRULE FOR CHINA2-WIRE HOSE


代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
01200-03	5	03		28	
01200-04	6	04		30	
01200-05	8	05		32	
01200-06	10	06		32	
01200-08	12	08		34	
01200-10	16	10		39	
01200-12	20	12		43	
01200-14	22	14		43	
01200-16	25	16		50	
01200-20	32	20		59	
01200-24	40	24		74	
01200-32	50	32		78	



01100

国产一层编织胶管套筒
FERRULE FOR CHINA1-WIRE HOSE


代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
01100-03	5	03		28	
01100-04	6	04		30	
01100-05	8	05		32	
01100-06	10	06		32	
01100-08	12	08		34	
01100-10	16	10		39	
01100-12	20	12		43	
01100-14	22	14		43	
01100-16	25	16		50	
01100-20	32	20		59	
01100-24	40	24		74	
01100-32	50	32		78	



01200

国产二层编织胶管套筒
FERRULE FOR CHINA2-WIRE HOSE


代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
01200-03	5	03		28	
01200-04	6	04		30	
01200-05	8	05		32	
01200-06	10	06		32	
01200-08	12	08		34	
01200-10	16	10		39	
01200-12	20	12		43	
01200-14	22	14		43	
01200-16	25	16		50	
01200-20	32	20		59	
01200-24	40	24		74	
01200-32	50	32		78	



01300

国产三层编织胶管套筒
FERRULE FOR CHINA3-WIRE HOSE


代号	股管 HOSE BORE		尺寸 DIMENSIONS		
PART NO	公称内径 DN	标号 DASH		L	
01300-04	6	04		30	
01300-05	8	05		32	
01300-06	10	06		32	
01300-08	12	08		34	
01300-10	16	10		39	
01300-12	20	12		43	
01300-14	22	14		43	
01300-16	25	196		50	
01300-20	32	20		59	
01300-24	40	24		74	
01300-32	50	32		78	



01400

R12/20-24 及国产飞宇牌四层钢丝缠绕胶管套筒
FERRULE FOR R12/20-24& 'FEIYU' 4-SPIRAL HOSE


代号	胶管 HOSE BORE		尺寸 DIMENSIONS		
PART NO	公称内径 DN	标号 DASH		L	
01400-04	6	04		37.5	
01400-06	10	06		39	
01400-08	12	08		41	
01400-10	16	10		43	
01400-12	20	12		51	
01400-14	22	14		54	
01400-16	25	196		61.5	
01400-20	32	20		67.5	
01400-24	40	24		75	
01400-32	50	32		79	



00100

SAE 100RIA/DIN20022 1ST 胶管套筒
FERRULE FOR SAE 100RIAT/DIN20022 1ST HOSE


代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00100-02	4	02		27	
00100-04	6	04		30	
00100-05	8	05		31	
00100-06	10	06		32	
00100-08	12	08		34	
00100-10	16	10		37	
00100-12	20	12		43	
00100-16	25	16		50	
00100-20	32	20		59	
00100-24	40	24		74	
00100-32	50	32		78	



00110

SAE 100RIAT/DIN20022 1SN 胶管套筒
FERRULE FOR SAE 100RIAT/DIN20022 1SN HOSE

代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00110-03	5	03		24.5	
00110-04	6	04		30	
00110-05	8	05		31	
00110-06	10	06		32	
00110-08	12	08		34	
00110-10	16	10		37	
00110-12	20	12		43	
00110-16	25	16		50	
00110-20	32	20		59	
00110-24	40	24		74	
00110-32	50	32		78	



00110-A

SAE 100R1AT/DIN20022 1SN 软管套筒
FERRULE FOR SAE 100R1AT/DIN20022 1SN HOSE


代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00110-03A	5	03		23	
00110-04A	6	04		30.5	
00110-05A	8	05		30	
00110-06A	10	06		32	
00110-08A	12	08		34	
00110-10A	16	10		37	
00110-12A	20	12		42	
00110-16A	25	16		51	



00200

SAE 100R2A/DIN20022 2ST 软管套筒
FERRULE FOR SAE 100R2AT/DIN20022 2ST HOSE

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00200-02	4	02		27	
00200-04	6	04		30	
00200-05	8	05		31	
00200-06	10	06		32	
00200-08	12	08		34	
00200-10	16	10		37	
00200-12	20	12		43	
00200-16	25	16		50	
00200-20	32	20		59	
00200-24	40	24		74	
00200-32	50	32		78	




00210

SAE 100R2AT/EN 853 2SN 软管套简
FERRULE FOR SAE 100R2AT/DIN20022 2SN HOSE

代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH	L		
00210-03	5	03	24.5		
00210-04	6	04	30		
00210-05	8	05	31		
00210-06	10	06	32		
00210-08	12	08	34		
00210-10	16	10	37		
00210-12	20	12	43		
00210-16	25	16	50		
00210-20	32	20	59		
00210-24	40	24	74		
00210-32	50	32	78		


注:不推荐用于工程机械



03310

SAE 100R2AT/EN 853 2ST 软管套简
FERRULE FOR SAE 100R2AT/DIN20022 2ST HOSE


代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH	L		
03310-03	5	03	23		
03310-04	6	04	30.5		
03310-05	8	05	30		
03310-06	10	06	32		
03310-08	12	08	34		
03310-10	16	10	37		
03310-12	19	12	42		
03310-16	25	16	51		
03310-20	32	20	59		
03310-24	40	24	67		
03310-32	50	32	72		



00400

4SP、4SH/12-16、R12/06-16 软管套筒
FERRULE FOR 4SP、4SH/10-16、R12/06-16 HOSE


代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00400-04	6	04		37.5	
00400-06	10	06		39	
00400-08	12	08		41	
00400-10	16	10		43	
00400-12	20	12		51	
00400-16	25	16		61.5	
00400-20	32	20		67.5	
00400-24	40	24		75	
00400-32	50	32		79	



00401

4SH、R12/326 软管套筒
FERRULE FOR 4SP、4SH/10-16、R12/06-16 HOSE

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00401-20	32	20		67.5	
00401-24	40	24		75	
00401-32	50	32		79	




00018

SAE 100 R7 软管套筒

FERRULE FOR SAE 100R7 HOSE

代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00018-03	5	03		27	
00018-04	6	04		29	
00018-05	8	05		31	
00018-06	10	06		31	
00018-08	12	08		34	
00018-10	16	10		36	
00018-12	20	12		43	
00018-16	25	16		50	




00TF0

铁氟龙套筒

FERRULE FOR TEFLON HOSE

代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00TF0-03	4	03		26.5	
00TF0-04	6	04		30.7	
00TF0-05	8	05		30.6	
00TF0-06	10	06		32.1	
00TF0-08	12	08		34.3	
00TF0-10	16	10		37	
00TF0-12	20	12		42.8	
00TF0-14	22	14		42.7	
00TF0-16	25	16		50.8	




00500

SAE 100 R5 胶管套筒

FERRULE FOR SAE 100 R5 HOSE

代号 PART NO.	胶管 HOSE BORE			尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH	SAE 标号		L	
00500-03	4	03	04		22.6	
00500-04	6	04	05		25.7	
00500-05	8	05	06		22.4	
00500-07	11	07	08		26.2	
00500-08	12	08	10		27.7	
00500-10	16	10	12		29.7	
00500-14	22	14	16		33.5	
00500-18	28	18	20		42.7	
00500-22	35	22	24		47	
00500-29	46	29	32		50.8	
00500-38	60	38	40		63.0	



00621

GB/T 10544 R13/SAE 100 R13/EN856 R13

FERRULE FOR FERRULE FOR SAE 100 R5 HOSE

软管剥内外胶套筒

代号 PART NO.	胶管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH		L	
00621-12	20	12		53	
00621-16	25	15		66	
00621-20	32	20		88.5	
00621-24	40	24		102	
00621-32	50	32		108	

型号索引 (INDEX)



10001



100011



100041



100001



10011



100111



10041



100101



10051



100511



10042



100501



10061



100611



10043



100601



10071



100711



10044



100701



100114



10111



10141



10101

				
50011	50041	51011	51041	51.53
				
52011				
				
12011	12011A	22011	22011D	22011D-SM
				
22041	22041			
				
22011	22041	22041		
				
17011-SM				
				
14011	51041	51011		



10611



10911



10711



10711L



10711



10741



10791



10811



10811



11811



11711



11741



11791



11791-II



11611



11641



11691



10011



10014



10012



10021



10024



10022



10111



10114



10112



10011-T



11001



11004



11002



11004



11011




11004



11001



11004

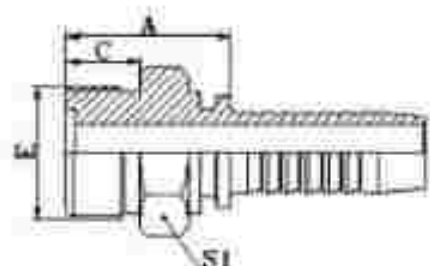


10311

公制外螺纹平面 O 形圈密封
O-RING METRIC MALE FLAT SEAT

代 号	螺 纹 代 号	软 管		尺 寸		
		公称内径	标 号	A	C	S1
10311-12-04	M12X1.25	6	04	22.5	10	14
10311-14-04	M14X1.5	6	04	23.5	11	14
10311-16-04	M16X1.5	6	04	23.5	11	17
10311-16-05	M16X1.5	8	05	23.5	11	17
10311-16-06	M16X1.5	10	06	23.5	11	17
10311-18-06	M18X1.5	10	06	23.5	11	19
10311-22-05	M22X1.5	8	05	27	12	24
10311-22-06	M22X1.5	10	06	26	12	24
10311-22-08	M22X1.5	12	08	26.5	12	24
10311-27-10	M27X1.5	16	10	31.5	13	30
10311-30-12	M30X1.5	20	12	33.5	14	32
10311-36-12	M36X2	20	12	35.5	16	38
10311-36-14	M36X2	22	14	35.5	16	38
10311-39-16	M39X2	25	16	39	16	41
10311-45-20	M45X2	32	20	44.5	20	46
10311-52-24	M52X2	40	24	47.5	22	55
10311-64-32	M64X2	50	32	52.5	27	65

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 10312-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 10312-XX-XX.

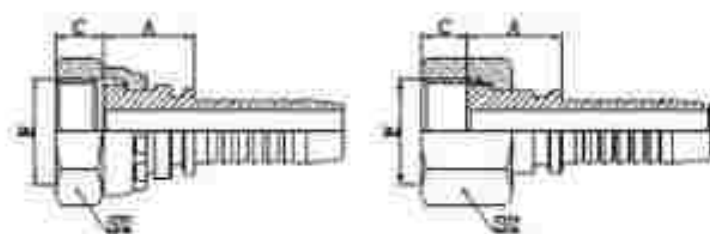

20211


20211-T

国标公制内螺纹平面
METRIC FEMALE FLAT SEAT

代 号	螺 纹	管			尺 寸		
		公称内径	标 号		A	C	S2
20211-10-02	M10X1	4	02		14	6	14
20211-12-03	M12X1.25	5	03		14	8	17
20211-14-04	M14X1.5	6	04		16	8.5	19
20211-14-05	M14X1.5	8	05		15.5	8.5	19
20211-16-04	M16X1.5	6	04		16.5	8	22
20211-16-05	M16X1.5	8	05		17	8	22
20211-16-06	M16X1.5	10	06		16.5	8	22
20211-18-05T	M18X1.5	8	05		17.5	8	24
20211-18-06	M18X1.5	10	06		18.5	8	24
20211-20-06T	M20X1.5	10	06		16	10	24
20211-20-08	M20X1.5	12	08		18.5	10	27
20211-22-06T	M22X1.5	10	06		16	10	27
20211-22-08	M22X1.5	12	08		19.5	10	27
20211-22-10	M22X1.5	16	10		19.5	10	27
20211-24-08T	M24X1.5	12	08		16.5	11	30
20211-24-10	M24X1.5	16	10		20.5	10.5	30
20211-27-08T	M27X1.5	12	08		18.5	10	32
20211-27-10T	M27X1.5	16	10		21	10	32
20211-30-12	M30X1.5	20	12		22	11	36
20211-33-14	M33X2	22	14		21.5	13	41
20211-36-12T	M36X2	20	12		24	13	41
20211-36-14T	M36X2	22	14		24	13	41
20211-39-16T	M39X2	25	16		25	13	46
20211-42-20W	M42X2	32	20		25	15	50
20211-45-20T	M45X2	32	20		27	15	55
20211-52-24T	M52X2	40	24		27	17	60
20211-60-28T	M60X2	45	28		26	20	70
20211-64-32T	M64X2	50	32		26	23	75

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 20212-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20212-XX-XX.

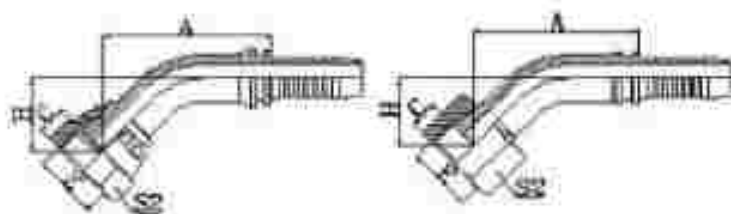

20241


20241-T

45°公制内螺纹平面
45° METRIC FEMALE FLAT SEAT

代 号	螺纹E	软 管			尺 寸			
		公称内径	标 号		A	C	H	S2
20241-14-04	M14X1.5	6	04		38	8.5	19	19
20241-14-05	M14X1.5	8	05		42.7	8.5	19.3	19
20241-16-05	M16X1.5	8	05		42.3	8.5	20.7	22
20241-18-06	M18X1.5	10	06		45.5	8	22	24
20241-22-08	M22X1.5	12	08		57.5	10	24.5	27
20241-27-10T	M27X1.5	16	10		58	10	24.5	32
20241-30-12T	M30X1.5	20	12		74	11	30	36
20241-36-12T	M36X2	20	12		75	13	27.5	41
20241-36-14T	M36X2	22	14		77.3	13	27	41
20241-36-16	M36X2	25	16		85.7	13	31.5	41
20241-39-16T	M39X2	25	16		82	13	30	46
20241-42-20W	M42X2	32	20		95.9	15	35.2	50
20241-45-20T	M45X2	32	20		94.5	15	35.5	55
20241-52-20T	M52X2	32	20		94.5	17	33.8	60
20241-52-24T	M52X2	40	24		105	17	38.5	60
20241-60-28T	M60X2	45	28		118.7	20	43.6	70
20241-62-32T	M64X2	50	32		127.8	23	45.6	75

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20242-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20242-XX-XX.

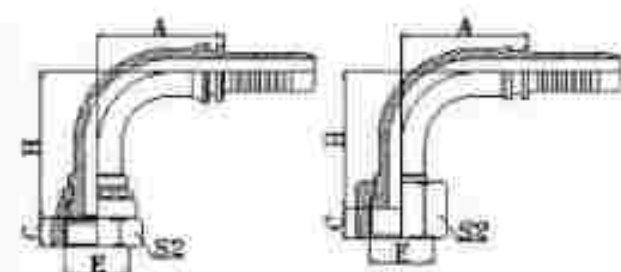

20291

20291-T

90°公制内螺纹平面

90° METRIC FEMALE FLAT SEAT

代 号	螺纹E	软 管		尺 寸			
		公称内径	标 号	A	C	H	S2
20291-12-02	M12X1.25	4	02	26.5	8	30.5	17
20291-12-04	M12X1.25	6	04	30	8	33.5	17
20291-14-04	M14X1.5	6	04	27.5	8.5	34	19
20291-14-05	M14X1.5	8	05	33	8.5	37	19
20291-16-04	M16X1.5	6	04	30	8	35	22
20291-16-05	M16X1.5	8	05	31	8	39.5	22
20291-16-06	M16X1.5	10	06	35.3	8	40.3	22
20291-18-05T	M18X1.5	8	05	33	8	39	24
20291-18-06	M18X1.5	10	06	33	8	42	24
20291-22-08	M22X1.5	12	08	42.5	10	49.5	27
20291-22-10	M22X1.5	16	10	57.5	10	53	27
20291-24-08T	M24X1.5	12	08	41	11	45.5	30
20291-27-04T	M27X1.5	6	04	30	10	35.5	32
20291-27-08T	M27X1.5	12	08	41	10	46	32
20291-27-10T	M27X1.5	16	10	48.5	10	51.5	32
20291-30-12	M30X1.5	20	12	50.5	11	63.5	36
20291-33-14	M33X2	22	14	71.2	13	65	41
20291-36-14T	M36X2	22	14	57.5	13	64	41
20291-36-16	M36X2	25	16	66	13	76.5	41
20291-39-16T	M39X2	25	16	66	13	72.5	46
20291-42-20W	M42X2	32	20	91.5	15	80.5	50
20291-45-20T	M45X2	32	20	75	15	85	55
20291-52-20T	M52X2	32	20	91.5	17	78.5	60
20291-52-24T	M52X2	40	24	89	17	97	60
20291-60-28T	M60X2	45	28	119.9	20	106.5	70
20291-64-32T	M64X2	50	32	130.95	23	113.5	75

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 20292-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20292-XX-XX.




10411

公制外螺纹 24°内锥面轻系列
ISO 8434-1-DIN 3861
METRIC MALE 24°CONE SEAT L.T.

代 号	螺 纹	软 管		管子外径	尺 寸		
		公称内径	标 号		A	C	S2
10411-12-04	M12X1.5	6	04	6	22	10	12
10411-14-04	M14X1.5	6	04	8	22	10	14
10411-14-05	M14X1.5	8	05	8	22	10	14
10411-16-04	M16X1.5	6	04	10	23.5	11	17
10411-16-05	M16X1.5	8	05	10	23.5	11	17
10411-16-06	M16X1.5	10	06	10	23.5	11	17
10411-18-05	M18X1.5	8	05	12	24	11	19
10411-18-06	M18X1.5	10	06	12	24	11	19
10411-22-06	M22X1.5	10	06	15	26.5	12	24
10411-22-08	M22X1.5	12	08	15	27	12	24
10411-26-08	M26X1.5	12	08	18	28.5	12	27
10411-26-10	M26X1.5	16	10	18	29.5	12	27
10411-27-10	M27X1.5	16	10	18	32.5	14	30
10411-30-10	M30X2	16	10	22	33.5	14	32
10411-30-12	M30X2	20	12	22	33.5	14	32
10411-36-16	M36X2	25	16	28	36	14	38
10411-45-20	M45X2	32	20	35	40	16	46
10411-52-24	M52X2	40	24	42	43	16	55

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 10412-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 10412-XX-XX.

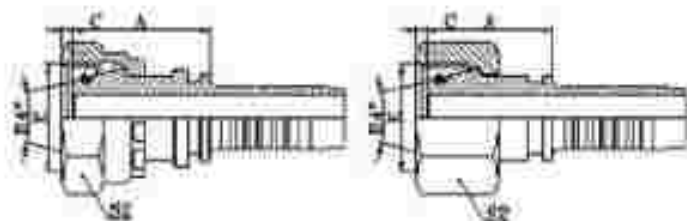

公制内螺纹 24°锥带 O 形圈轻系列
ISO 2151-2-DIN 3865
METRIC FEMALE 24° CONE O-RING L.T.

20411

20411-T

代 号	螺 纹 型	管 径		管子外径	O 形圈	尺 寸		
		公称内径	标 号			A	C	S2
20411-12-04	M12X1.5	6	04	6	O04.5X1.5	25	1	17
20411-14-04	M14X1.5	6	04	8	O06.5X1.5	26.5	2	19
20411-14-06	M14X1.5	10	06	8	O06.5X1.5	27.5	2	19
20411-16-04	M16X1.5	6	04	10	O08.0X1.5	27	2	22
20411-16-05	M16X1.5	8	05	10	O08.0X1.5	27	2	22
20411-16-06	M16X1.5	10	06	10	O08.0X1.5	28	2	22
20411-18-05T	M18X1.5	8	05	12	O10.0X1.5	25.5	1.5	22
20411-18-06	M18X1.5	10	06	12	O10.0X1.5	29	2.5	24
20411-18-08	M18X1.5	12	08	12	O10.0X1.5	29.5	2.5	24
20411-22-05T	M22X1.5	8	05	15	O12.0X2	26.5	3	27
20411-22-06T	M22X1.5	10	06	15	O12.0X2	28.5	3	27
20411-22-08	M22X1.5	12	08	15	O12.0X2	32.5	2.5	27
20411-26-10	M26X1.5	16	10	18	O15.0X2	34.5	2.5	32
20411-26-12	M26X1.5	20	12	18	O15.0X2	34.5	2.5	32
20411-30-10T	M30X2	16	10	22	O20.0X2	33	3.8	36
20411-30-12	M30X2	20	12	22	O20.0X2	36.5	4	36
20411-36-12T	M36X2	20	12	28	O26.0X2	36	4.5	46
20411-36-14T	M36X2	22	14	28	O26.0X2	36.5	4.5	46
20411-45-16T	M45X2	25	16	35	O32.0X2	42	4	55
20411-45-20T	M45X2	32	20	35	O32.0X2	43	4	55
20411-52-20T	M52X2	32	20	42	O38.0X2	44.5	4	60
20411-52-24T	M52X2	40	24	42	O38.0X2	44.5	4	60

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 20412-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20412-XX-XX.


20411C 20411C-T

公制内螺纹 24°球面 轻系列
METRIC FEMALE MULTISEAL 24° CONE L.T.


代 号	螺纹E	软 管		管子外径	尺 寸		
		公称内径	标 号		A	C	S2
20411C-12-04	M12X1.5	6	04	6	19.5	3.5	17
20411C-14-04	M14X1.5	6	04	8	20.5	3.5	19
20411C-16-04	M16X1.5	6	04	10	21	3.5	22
20411C-16-05	M16X1.5	8	05	10	21	3.5	22
20411C-16-06	M16X1.5	10	06	10	21	3.5	22
20411C-18-06	M18X1.5	10	06	12	22.5	3	24
20411C-22-06T	M22X1.5	10	06	15	23.5	4.5	27
20411C-22-08	M22X1.5	12	08	15	24	4.5	27
20411C-26-10	M26X1.5	16	10	18	27	4	32
20411C-30-10T	M30X2	16	10	22	26.5	7	30
20411C-30-12	M30X2	20	12	22	27	7	36
20411C-30-14	M30X2	22	14	22	27	7	36
20411C-36-16	M36X2	25	16	28	29	6.5	41
20411C-45-20T	M45X2	32	20	35	33	7	55
20411C-52-24T	M52X2	40	24	42	34	8	60

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20412C-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20412C-XX-XX.

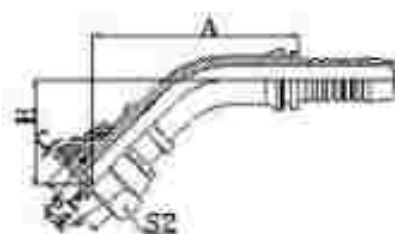

20441

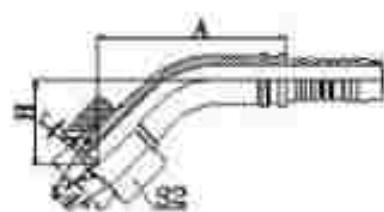


20441-T

45°公制内螺纹 24°锥带 O 形圈轻系列
ISO 12151-2-DIN 3865
45° METRIC FEMALE 24° CONE L.T.


代 号	螺纹 E	软 管		管子外径	O 形圈	尺 寸			
		公称内径	标 号			A	C	H	S2
20441-12-04	M14X1.5	6	04	8	O06.5X1.5	45	2	26	19
20441-16-05	M16X1.5	8	05	10	O08.0X1.5	49.5	2	27.8	22
20441-16-06	M16X1.5	10	06	10	O08.0X1.5	51.3	2	27.8	22
20441-18-05T	M18X1.5	8	05	12	O10.0X1.5	44.7	1.5	23.2	22
20441-18-06	M18X1.5	10	06	12	O10.0X1.5	53	2.5	29	24
20441-22-05T	M22X1.5	8	05	15	O12.0X2		3		27
20441-22-06T	M22X1.5	10	06	15	O12.0X2	49	3	25.3	27
20441-22-08	M22X1.5	12	08	15	O12.0X2	66.5	2.5	34	27
20441-26-08T	M26X1.5	12	08	18	O15.0X2	61	2.1	28	32
20441-26-10	M26X1.5	16	10	18	O15.0X2	70	2.5	36	32
20441-26-12	M26X1.5	20	12	18	O15.0X2		2.5		32
20441-30-10T	M30X1.5	16	10	22	O20.0X2	64	3.8	30	36
20441-30-12	M30X1.5	20	12	22	O20.0X2	84.5	4	40.5	36
20441-36-12T	M36X1.5	20	12	28	O28.0X2	79.3	4.5	35.5	46
20441-36-14T	M36X2	22	14	28	O28.0X2		4.5		46
20441-45-20T	M45X2	32	20	35	O35.0X2	101.8	4	42.4	55
20441-52-20T	M52X2	32	20	42	O42.0X2		4	46.6	60
20441-52-24T	M52X2	40	24	42	O42.0X2	113	4		60

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 20412-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20412-XX-XX.

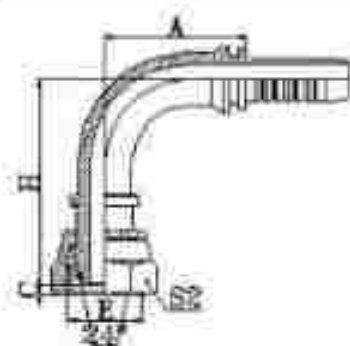

20491



20491-T

90°公制内螺纹 24°锥带 O 形圈轻系列
ISO 12151-2-DIN 3865
90° METRIC FEMALE 24° CONE O-RING

代 号	螺纹 E	软管		管子外径	O 形圈	尺 寸			
		公称内径	标 号			A	C	H	S2
20491-12-03	M12X1.5	5	03	6	O04.5X1.5	25.6	1	34.5	17
20491-12-04	M12X1.5	6	04	6	O04.5X1.5	27.5	1	43	17
20491-14-04	M14X1.5	6	04	8	O06.5X1.5	27.5	2	44.5	19
20491-16-04	M16X1.5	6	04	10	O08.0X1.5	27.5	2	45	22
20491-16-05	M16X1.5	8	05	10	O08.0X1.5	31	2	49.5	22
20491-16-06	M16X1.5	10	06	10	O08.0X1.5	33	2	50.5	22
20491-18-05T	M18X1.5	8	05	12	O10.0X1.5	31	1.5	43	22
20491-18-06	M18X1.5	10	06	12	O10.0X1.5	33	2.5	52.5	24
20491-22-06T	M22X1.5	10	06	15	O12.0X2.0	33	3	47	27
20491-22-08	M22X1.5	12	08	15	O12.0X2.0	42.5	2.5	62.5	27
20491-26-08T	M26X1.5	12	08	18	O15.0X2.0	42.5	2.1	54.5	32
20491-26-10	M26X1.5	16	10	18	O15.0X2.0	48.5	2.5	68	32
20491-26-12	M26X1.5	20	12	18	O15.0X2.0	50.5	2.5	76	32
20491-30-10T	M30X2	16	10	22	O20.0X2.0	48.5	3.8	59.5	36
20491-30-12	M30X2	20	12	22	O20.0X2.0	50.5	4	78	36
20491-36-12T	M36X2	20	12	28	O26.0X2.0	50.5	4.5	71	46
20491-36-14T	M36X2	22	14	28	O26.0X2.0		4.5		46
20491-45-16T	M45X2	25	16	35	O32.0X2.5	66	4	83	55
20491-45-20T	M45X2	32	20	35	O32.0X2.5	75	4	95	55
20491-52-20T	M52X2	32	20	42	O38.0X2.5	75	4	96.5	60
20491-52-24T	M52X2	40	24	42	O38.0X2.5	89	4	108.5	60

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 204922-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 204922XX-XX.

20491C


20491C-T

90° 公制内螺纹 24° 球面轻系列
90°METRIC FEMALE 24° CONE
MULTISEAL L.T.

代 号	螺纹	管 号		管子外径	尺 寸			
		公称内径	标 号		A	C	H	S2
20491C-14-04	M14X1.5	6	04	8	30	3.5	39.5	19
20491C-16-04	M16X1.5	6	04	10	30	3.5	40	22
20491C-16-05	M16X1.5	8	05	10	33	3.5	43	22
20491C-16-06	M16X1.5	10	06	10	35.25	3.5	45.2	22
20491C-18-06	M18X1.5	10	06	12	35.25	3	47.25	24
20491C-22-08	M22X1.5	12	08	15	41	4.5	53	27
20491C-26-10	M26X1.5	16	10	18	56.5	4	60	32
20491C-30-12	M30X2	20	12	22	65.5	7	38.5	36
20491C-36-12T	M36X2	20	12	28	65.5	6.5	67.5	41

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 20491C-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 20492C-XX-XX.

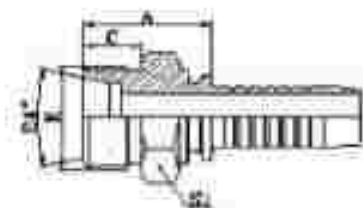

10511

公制外螺纹 24° 内锥面重系列


ISO-84341—DIN 3861

METRIC MALE 24° CONE SEAT H.T.

代 号	螺纹 E	管 管		管子外径	尺 寸			
		公称内径	标 号		A	C	S1	
10511-14-04	M14X1.5	6	04	6	24	12	14	
10511-16-04	M16X1.5	6	04	8	24.5	12	17	
10511-18-04	M18X1.5	6	04	10	25	12	19	
10511-20-05	M20X1.5	8	05	12	26	12	22	
10511-20-06	M20X1.5	10	06	12	26	12	22	
10511-22-05	M22X1.5	8	05	14	28.5	14	24	
10511-22-06	M22X1.5	10	06	14	28.5	14	24	
10511-22-08	M22X1.5	12	08	14	29	14	24	
10511-24-08	M24X1.5	12	08	16	30	14	27	
10511-30-10	M30X2	16	10	20	35.5	16	32	
10511-30-12	M30X2	20	12	20	35.5	16	32	
10511-36-12	M36X2	20	12	25	38.5	18	38	
10511-36-16	M36X2	25	16	25	40	18	38	
10511-42-16	M42X2	25	16	30	43	20	46	
10511-42-20	M42X2	32	20	30	44	20	46	
10511-52-20	M52X2	32	20	38	48	22	55	

注: 1. 上述代号用于硬管软管。 2. 如需用于缠绕软管代号改为 20512-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 10512-XX-XX.

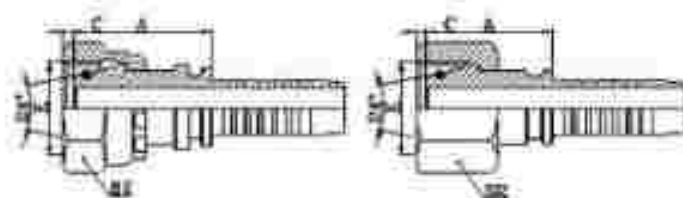

公制内螺纹
锥带 O 形圈重系列
ISO 12151-2—DIN 386
METRIC FEMALE 24° CONE
O-RING H.T.

20511

20511-T

代 号	螺 纹 主	管 管		管子外径	O 形圈	尺 寸		
		公称内径	标 号			A	C	S1
20511-14-04	M16X1.5	6	04	6	O04.5X1.5	27.4	1.5	19
20511-16-04	M16X1.5	6	04	8	O06.5X1.5	27.5	1.5	22
20511-16-05	M16X1.5	8	05	8	O06.5X1.5	27.5	1.5	22
20511-18-04T	M18X1.5	6	04	10	O08.0X1.5	26	1.5	22
20511-18-06	M18X1.5	10	06	10	O08.0X1.5	29.5	2	24
20511-20-06T	M20X1.5	10	06	12	O10.0X1.5	27.5	2.5	24
20511-20-08	M20X1.5	12	08	12	O10.0X1.5	31.5	2.5	27
20511-22-06T	M22X1.5	10	06	14	O11.0X2.0	28.5	3	27
20511-22-08	M22X1.5	12	08	14	O11.0X2.0	32.5	2.5	27
20511-24-06T	M24X1.5	10	06	16	O13.0X2.0	27	3	30
20511-24-08T	M24X1.5	12	08	16	O13.0X2.0	30	3	30
20511-30-10T	M30X2	16	10	20	O16.3X2.4	33.5	2.5	36
20511-30-12	M30X2	20	12	20	O16.3X2.4	37	3	36
20511-36-12T	M36X2	20	12	25	O20.3X2.4	37	3.2	46
20511-36-14T	M36X2	22	14	25	O20.3X2.4	37	3.2	46
20511-42-12T	M42X2	20	12	30	O25.3X2.4	37.5	3.9	50
20511-42-16T	M42X2	25	16	30	O25.3X2.4	41	3.9	50
20511-52-20T	M52X2	32	20	38	O33.3X2.4	44	4.5	60
20511-52-24T	M52X2	40	24	38	O33.3X2.4	44	4.5	60

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 20512-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS20512-XX-XX.


20511C 20511C-T

公制内螺纹 24° 球面密封系列
METRIC FEMALE 24° MULTISEAL H.T.


代 号	螺纹 E	软管		管子外径	尺 寸			
		公称内径	标 号		A	C	SE	
20511C-18-04T	M18X1.5	6	04	10	21	3	22	
20511C-20-05T	M20X1.5	8	05	12	21.5	4.5	24	
20511C-20-06T	M20X1.5	10	06	12	21.5	4.5	24	
20511C-22-06T	M22X1.5	10	06	14	21.5	4.5	27	
20511C-24-08T	M24X1.5	12	08	16	23	5	30	
20511C-30-10T	M30X2	16	10	20	26.5	7	36	
20511C-36-12T	M36X2	20	12	25	27	6.5	41	
20511C-42-16T	M42X2	25	16	30	29.5	9	50	
20511C-52-20T	M52X2	32	20	38	34	8	60	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20512C-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20512C-XX-XX.



20541



20541-T

45° 公制内螺纹
24° 锥带 O 形圈重系列
ISO 12151-2-DIN
45° METRIC FEMALE
24° CONE O-RING H.T.

代 号	螺纹E	软管		管子外径	O 形圈	尺 寸			
		公称内径	标 号			A	C	H	S2
20541-14-04	M16X1.5	6	04	6	O04.5X1.5	46	1.5	27	19
20541-16-04	M16X1.5	6	04	8	O06.5X1.5	46	1.5	27	22
20541-16-05	M16X1.5	8	05	8	O06.5X1.5	49.5	1.5	28.1	22
20541-18-04T	M18X1.5	6	04	10	O08.0X1.5	41.5	1.5	22.5	22
20541-18-06	M18X1.5	10	06	10	O08.0X1.5	53	2	29.5	24
20541-20-06T	M20X1.5	10	06	12	O10.0X1.5	48.5	2.5	25	24
20541-20-08	M20X1.5	12	08	12	O10.0X1.5	65.9	2.5	33	27
20541-22-06T	M22X1.5	10	06	14	O11.0X2.0	48.9	3	25.3	27
20541-22-08	M22X1.5	12	08	14	O11.0X2.0	66.5	2.5	34	27
20541-24-08T	M24X1.5	12	08	16	O13.0X2.0	61.3	3	28.5	30
20541-30-10T	M30X2	16	10	20	O16.3X2.4	64.5	2.5	30.8	36
20541-30-12	M30X2	20	12	20	O16.3X2.4	84.5	3	41	36
20541-36-12T	M36X2	20	12	25	O20.3X2.4	80	3.2	36	46
20541-36-14T	M36X2	22	14	25	O20.3X2.4		3.2		46
20541-42-16T	M42X2	25	16	30	O25.3X2.4	89.4	3.9	37.5	50
20541-52-20T	M52X2	32	20	38	O33.3X2.4	102	4.5	42.8	60
20541-52-24T	M52X2	40	24	38	O33.3X2.4		4.5		60

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20542-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20542-XX-XX.

20541C


20541C-T

45° 公制内螺纹 24° 球面系列 DIN3868
45° METRIC FEMALE 24° MULTISEAL H.T.

代 号	螺纹	管		管子外径		尺 寸			
		公称内径	标 号			A	C	H	S2
20541C-16-04	M16X1.5	6	04	8		44.8	3	22.7	19
20541C-18-04T	M18X1.5	6	04	10		43.7	3	21.6	22
20541C-20-06T	M20X1.5	10	06	12		48.9	4.5	24.6	24
20541C-24-08T	M24X1.5	12	08	16		61.4	2.5	26.5	30

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20542Cxx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20542C-XX-XX.



20591



20591-T

90° 公制内螺纹
24° 锥带 O 形圈重系列
ISO 12151-2-DIN 3865
90°METRIC FEMALE 24°CONE
O-RING H.T.

代 号	螺纹 E	软管		管子外径	O 形圈	尺 寸			
		公称内径	标 号			A	C	H	S 2
20591-14-04	M16X1.5	6	04	6	O04.5X1.5	27.5	1.5	45.4	19
20591-16-04	M16X1.5	6	04	8	O06.5X1.5	27.5	1.5	45.5	22
20591-16-05	M16X1.5	8	05	8	O06.5X1.5	31	1.5	50	22
20591-18-05T	M18X1.5	8	05	10	O08.0X1.5	31	1.5	43.5	22
20591-18-06	M18X1.5	10	06	10	O08.0X1.5	33	2	53	24
20591-20-06T	M20X1.5	10	06	12	O10.0X1.5	33	2.5	46.5	24
20591-20-08	M20X1.5	12	08	12	O10.0X1.5	42.5	2.5	61.5	27
20591-22-06T	M22X1.5	10	06	14	O11.0X2.0	33	3	47	27
20591-22-08	M22X1.5	12	08	14	O11.0X2.0	42.5	2.5	62.5	27
20591-24-08T	M24X1.5	12	08	16	O13.0X2.0	42.5	3	55	30
20591-24-10	M24X1.5	16	10	16	O13.0X2.0	48.5	2.5	68	30
20591-30-10T	M30X2	16	10	20	O16.3X2.4	48.5	2.5	60.5	36
20591-30-12	M30X2	20	12	20	O16.3X2.4	50.5	3	78.5	36
20591-36-12T	M36X2	20	12	25	O20.3X2.4	50.5	3.2	72	46
20591-36-14T	M36X2	22	14	25	O20.3X2.4	57.5	3.2	74	46
20591-42-16T	M42X2	25	16	30	O25.3X2.4	60	3.9	83	50
20591-52-20T	M52X2	32	20	38	O33.3X2.4	75	4.5	95.5	60
20591-52-24T	M52X2	40	24	38	O33.3X2.4	93	4.5	107.5	60

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 20592-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20592-XX-XX.


20591C 20591C-T

90° 公制内螺纹 24° 球面重系列
90° METRIC FEMALE 24° MULTISEAL H.T.

代 号	螺纹E	管		管子外径		尺 寸			
		公称内径	标 号			A	C	H	SZ
20591C-16-04	M16X1.5	6	04	8		30	3	40	22
20591C-18-04T	M18X1.5	6	04	10		30	3	38.5	22
20591C-20-05T	M20X1.5	8	05	12		33	4.5	42	24
20591C-20-06T	M20X1.5	10	06	12		35.3	4.5	45.7	24
20591C-22-06T	M22X1.5	10	06	14		35.3	4.5	44.7	27
20591C-24-08T	M24X1.5	12	08	16		41	5	52	30
20591C-30-10T	M30X2	16	10	20		56.5	7	56.5	36
20591C-36-12T	M36X2	20	12	25		63.5	6.5	66.5	41
20591C-42-16T	M42X2	25	16	30		78	9	73.5	50
20591C-52-20T	M52X2	32	20	38		93	8	87.5	60

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20592C-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20592C-XX-XX.

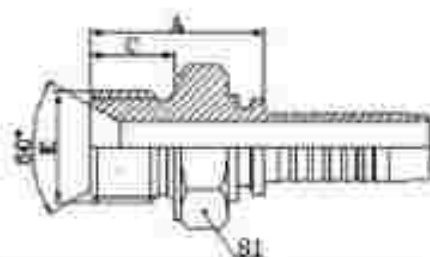

10611


公制外螺纹 60° 内锥面或六角端面
用组合垫密封的双用接头

METRIC MALE DOUBLE USE FOR 60°

代 号	螺纹 E	数 量			尺 寸			
		公称内径	标 号		A	C	S1	
10611-14-04	M14X1.5	6	04		23.5	11	19	
10611-14-06	M14X1.5	10	06		25	11	19	
10611-16-04	M16X1.5	6	04		27.5	12	22	
10611-16-05	M16X1.5	8	05		27.5	12	22	
10611-18-06	M18X1.5	10	06		29.5	12	24	
10611-22-06	M22X1.5	10	06		30.5	14	27	
10611-22-08	M22X1.5	12	08		31	14	27	
10611-24-10	M24X1.5	16	10		35	14	30	
10611-26-10	M26X1.5	16	10		35	16	32	
10611-27-10D	M27X1.5	16	10		35	16	32	
10611-27-10	M27X1.5	16	10		37	18	32	
10611-30-12D	M30X2	20	12		38	18	36	
10611-30-12	M30X2	20	12		38	18	36	
10611-33-16	M33X2	25	16		43	20	46	
10611-42-20	M42X2	32	20		46	20	50	
10611-45-20	M45X2	32	20		46	20	55	
10611-48-24	M48X2	40	24		46	20	55	
10611-52-24	M52X2	40	24		46	20	60	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 10612xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 10612-XX-XX.

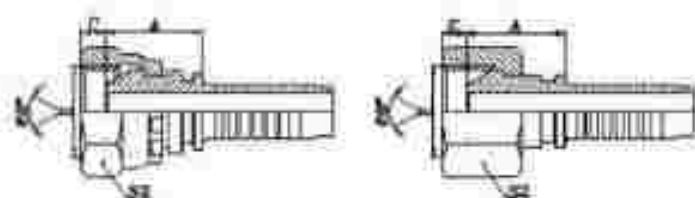

公制外内螺纹 60°
METRIC FEMALE 60°CONE


20611

20611-T

代 号	螺纹主	款 型			尺 寸			
		公称内径	标 号		A	C	S2	
20611-14-04	M14X1.5	6	04		19	5.5	19	
20611-16-05	M16X1.5	8	05		19.5	5.5	22	
20611-16-06	M16X1.5	10	06		19	5.5	22	
20611-18-06	M18X1.5	10	06		21	5.5	24	
20611-20-08	M20X1.5	12	08		22	6.5	27	
20611-22-08	M22X1.5	12	08		23.5	6	27	
20611-24-10	M24X1.5	16	10		24.5	6.5	30	
20611-26-10	M26X1.5	16	10		25	6	32	
20611-27-10DT	M27X1.5	16	10		25.5	6	32	
20611-27-10T	M27X1.5	16	10		25.5	6	32	
20611-30-10D	M30X2	16	10		26.5	6	36	
20611-30-12D	M30X2	20	12		26.5	6	36	
20611-30-12	M30X2	20	12		27	6	36	
20611-36-16	M36X2	25	16		30	6.5	41	
20611-39-16T	M39X2	25	16		30	6.5	46	
20611-45-20T	M45X2	32	20		31	8.5	55	
20611-52-24T	M52X2	40	24		32	10	60	

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 20612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20612-XX-XX.

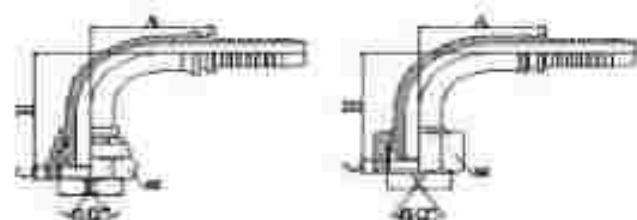

90° 公制外内螺纹 60° 外锥面
90°METRIC FEMALE 60°CONE

20691

20691-T

代 号	螺纹 E	软管			尺 寸			
		公称内径	标 号		A	C	H	S2
20611-14-04	M14X1.5	6	04		27.5	5.5	37	19
20611-16-05	M16X1.5	8	05		31	5.5	42	22
20611-18-06	M18X1.5	10	06		33	5.5	44.5	24
20611-22-08	M22X1.5	12	08		42.5	6	53.5	27
20611-27-10DT	M27X1.5	16	10		56	6	55	32
20611-30-12D	M30X2	20	12		66.2	6	68.5	36
20611-36-16	M36X2	25	16		78	6.5	76.5	41
20611-36-14T	M36X2	22	14		71.2	6.5	67.5	41
20611-39-16T	M39X2	25	16		76.7	6.5	74	46
20611-45-20T	M45X2	32	20		91.3	8.5	85	55
20611-52-24T	M52X2	40	24		109.4	10	99	60

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20692-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20692-XX-XX.



10711



国际公制外螺纹 74° 外锥面

METRIC MALE 74°CONE

代 号	螺纹E	软 管		尺 寸			
		公称内径	标 号		A	C	SI
10711-10-02	M10X1	4	02		23	12.5	14
10711-10-03	M10X1	5	03		23	12.5	14
10711-12-03	M12X1.5	5	03		26.5	15.7	14
10711-12-03C	M12X1.25	5	03		24.5	14	14
10711-14-04	M14X1.5	6	04		30.5	18	17
10711-14-06	M14X1.5	10	06		30.5	18	17
10711-16-05	M16X1.5	8	05		31.5	19	17
10711-16-06	M16X1.5	10	06		31.5	19	17
10711-18-06	M18X1.5	10	06		32	19	19
10711-22-08	M22X1.5	12	08		34.5	19.5	24
10711-24-08	M24X1.5	12	08		36.5	20	27
10711-27-10	M27X1.5	16	10		39	20.5	30
10711-30-12	M30X2	20	12		42.5	23	32
10711-30-12E	M30X2	20	12		45.5	26	32
10711-33-12	M33X2	20	12		46.5	26	36
10711-36-14	M36X2	22	14		47	26	38
10711-39-16	M39X2	25	16		50	27.5	41
10711-42-20	M42X2	32	20		52.5	28.5	46
10711-45-20	M45X2	32	20		52.5	28.5	46

注: 1.上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 10712-xx-xx。

NOTE : 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES , HOSE FITTINGS SERIES NUMBER IS10712-XX-XX.



国际公制内螺纹 74° 内锥

METRIC FEMALE 74° CONE SEAT

20711

20711-T

代 号	螺纹 E	软管			尺 寸			
		公称内径	标 号		A	C	S2	
20711-10-02	M10X1	4	02		14	7.5	14	
20711-12-03C	M12X1.25	5	03		14	9	17	
20711-12-03	M12X1.5	5	03		14	10	17	
20711-12-04	M12X1.5	6	04		15	10	17	
20711-14-04	M14X1.5	6	04		16	8.5	19	
20711-14-05	M14X1.5	8	05		15.5	8.5	19	
20711-14-06	M14X1.5	10	06		15.5	8.5	19	
20711-16-04	M16X1.5	6	04		16.5	8	22	
20711-16-05	M16X1.5	8	05		17	8	22	
20711-16-06	M16X1.5	10	06		16	8	22	
20711-18-05T	M18X1.5	8	05		16	8	22	
20711-18-06	M18X1.5	10	06		18.5	10	24	
20711-20-06T	M20X1.5	10	06		16	10	24	
20711-20-08	M20X1.5	12	08		18.5	10	27	
20711-22-06T	M22X1.5	10	06		16	10	27	
20711-22-08	M22X1.5	12	08		19.5	10	27	
20711-22-10	M22X1.5	16	10		19	10	27	
20711-24-08T	M24X1.5	12	08		16.5	11	30	
20711-27-08T	M27X1.5	12	08		18.5	11	32	
20711-27-10T	M27X1.5	16	10		21	11	32	
20711-27-12	M27X1.5	20	12		21.5	11	32	
20711-30-10T	M30X1.5	16	10		18	11	36	
20711-30-12	M30X1.5	20	12		22	11	36	
20711-33-10T	M33X2	16	10		19.5	13	41	
20711-33-12T	M33X2	20	12		20	13	41	
20711-33-14	M33X2	22	14		21.5	13	41	
20711-36-12T	M36X2	20	12		20	14	41	
20711-36-14T	M36X2	22	14		24	14	41	
20711-36-16	M36X2	25	16		23	14	41	
20711-39-16T	M39X2	25	16		25	14	46	
20711-42-16T	M42X2	25	16		23.5	15	50	
20711-42-20W	M42X2	32	20		24.5	15	50	
20711-45-20T	M45X2	32	20		27	15	55	
20711-52-24T	M52X2	40	24		27	17	60	

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 20712-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20712-XX-XX.




20741

45° 国际公制内螺纹 74° 内锥面
45°METRIC FEMALE 74°CONE SEAT

代 号	螺纹E	软管		尺 寸			
		公称内径	标 号	A	C	H	S2
20741-14-04	M14X1.5	6	04	38	8.5	19	19
20741-16-05	M16X1.5	8	05	42.3	8	20.7	22
20741-18-06	M18X1.5	10	06	45.5	10	22	24
20741-22-08	M22X1.5	12	08	57.5	10	24.5	27
20741-27-10	M27X1.5	16	10	60	11	26.5	32
20741-30-12	M30X1.5	20	12	74	11	30	36
20741-33-12	M33X2	20	12	77.4	13	30	41
20741-33-16	M33X2	25	16	85	13	30.8	41
20741-36-14	M36X2	22	14	79.8	14	29.6	4
20741-36-16	M36X2	25	16	85.7	14	31.5	41
20741-39-16	M39X2	25	16	85	14	33	46
20741-45-20W	M45X2	32	20	97	15	36.2	55
20741-52-24W	M52X2	40	24	115.3	17	40.9	60

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20742-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20742-XX-XX.




20791

90° 国际公制内螺纹 74° 内锥面
90°METRIC FEMALE 74°CONE SEAT

代 号	螺纹E	软 管		尺 寸			
		公称内径	标 号	A	C	H	S2
20791-12-04C	M12X1.25	6	04	30	9	33.5	17
20791-12-04	M12X1.5	6	04	30	10	33.5	17
20791-14-04	M14X1.5	6	04	27.5	8.5	34	19
20791-16-04	M16X1.5	6	04	30	8	35	22
20791-16-05	M16X1.5	8	05	31	8	39.5	22
20791-18-06	M18X1.5	10	06	33	10	42	24
20791-22-08	M22X1.5	12	08	42.5	10	49.5	27
20791-22-10	M22X1.5	16	10	56	10	52.5	27
20791-27-10	M27X1.5	16	10	48.5	11	54.5	32
20791-30-12	M30X1.5	20	12	50.5	11	63.5	36
20791-33-12	M33X2	20	12	65.5	13	63.5	41
20791-33-16	M33X2	25	16	66	13	75.5	41
20791-36-12	M36X2	20	12	65.5	14	63.5	41
20791-36-14	M36X2	22	14	71.2	14	64.5	41
20791-39-16	M39X2	25	16	66	14	76.5	46
20791-45-20W	M45X2	32	20	91.5	15	83	55
20791-52-20W	M52X2	32	20	93	17	84.5	60
20791-52-24W	M52X1.5	40	24	110.7	17	96.5	60

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20792-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20792-XX-XX.

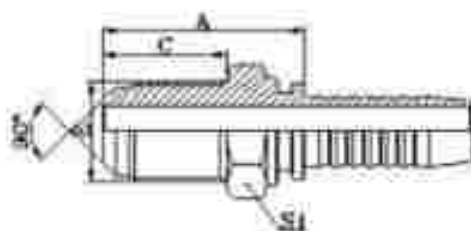


10811L

公制外螺纹 90° 外锥面

METRIC MALE 90° CONE

代 号	螺 纹 E	软 管			尺 寸			
		公称内径	标 号		A	C	H	S2
10811L-12-04	M12X1.5	6	04		46	34	17	17
10811L-12-04A	M12X1	6	04		44.5	32.5	17	17
10811L-14-04	M14X1.5	6	04		46	34	17	19
10811L-14-06	M14X1.5	10	06		46.5	34	17	19
10811L-16-04	M16X1.5	6	04		46.5	34	19	22
10811L-16-06	M16X1.5	10	06		46.5	34	22	22
10811L-20-06	M20X1.5	10	06		57	40	27	27
10811L-20-08	M20X1.5	12	08		57.5	40	27	27
10811L-22-08	M22X1.5	12	08		62.5	45	27	27

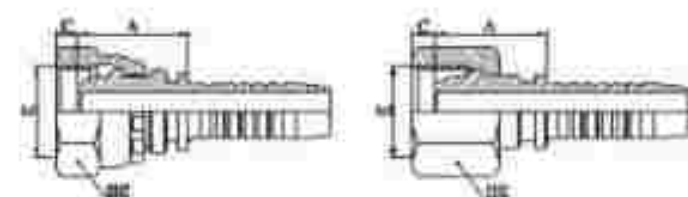

公制内螺纹球面

METRIC FEMALE MULTISEAL


20111

20111-T

代 号	螺纹E	软 管			尺 寸			
		公称内径	标 号		A	C	S2	
20111-10-03	M10X1	5	03		18	2.5	14	
20111-10-04	M10X1	6	04		18	2.5	14	
20111-12-04	M12X1.5	6	04		18.5	4	17	
20111-12-05	M12X1.5	8	05		18.5	4	17	
20111-14-04	M14X1.5	6	04		20	4.5	19	
20111-14-05	M14X1.5	8	05		19.5	4.5	19	
20111-16-04	M16X1.5	6	04		20.5	4.5	22	
20111-16-05	M16X1.5	8	05		20.5	4.5	22	
20111-16-06	M16X1.5	10	06		20	4.5	22	
20111-18-05T	M18X1.5	8	05		21.5	4	24	
20111-18-06	M18X1.5	10	06		22.5	4	24	
20111-18-08	M18X1.5	12	08		22	4	24	
20111-20-06T	M20X1.5	10	06		23.5	5.5	24	
20111-20-08	M20X1.5	12	08		23	5.5	27	
20111-22-06T	M22X1.5	10	06		23	5	27	
20111-22-08	M22X1.5	12	08		24.5	5	27	
20111-22-10	M22X1.5	16	10		24.5	5	27	
20111-24-08T	M24X1.5	12	08		22	5.5	30	
20111-24-10	M24X1.5	16	10		26	5	30	
20111-27-08DT	M27X1.5	12	08		23	5.5	32	
20111-27-10DT	M27X1.5	16	10		26	5.5	32	
20111-27-12D	M27X1.5	20	12		26	5.5	32	
20111-27-10T	M27X2	16	10		26	7	32	
20111-30-12D	M30X1.5	20	12		26.5	6	36	
20111-30-12	M30X2	20	12		26	7	36	
20111-36-12T	M36X2	20	12		26	7	41	
20111-36-14T	M36X2	22	14		26	7	41	
20111-39-14T	M39X2	22	14		28.5	7	46	
20111-39-16T	M39X2	25	16		34	7	46	
20111-42-16T	M42X2	25	16		30	8.5	50	
20111-45-20T	M45X2	32	20		31.5	8.5	55	
20111-52-20T	M52X2	32	20		33	9	60	
20111-52-24T	M52X2	40	24		33	9	60	
20111-64-32T	M64X2	50	32		35	14	75	

注: 1. 上述代号用于编织软管, 2. 如需用于螺旋软管代号改为 20112-xx-xx.

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20112-XX-XX.

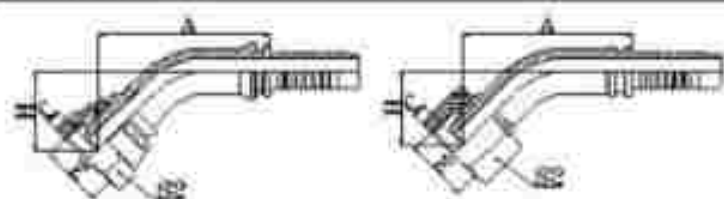

45° 公制内螺纹球面

45° METRIC FEMALE MULTISEAL


20141

20141-T

代 号	螺纹	款 管		尺 寸			
		公称内径	标 号	A	C	H	S2
20141-10-03	M10X1	5	03	41.1	2.5	20.7	14
20141-10-04	M10X1	6	04	43.2	2.5	21.5	14
20141-12-03	M12X1.5	5	03	40.9	4	21.2	17
20141-12-04	M12X1.5	9	04	43	4	22	17
20141-14-04	M14X1.5	6	04	43.4	4.5	21.3	19
20141-14-05	M14X1.5	8	05	45.5	4.5	22.2	19
20141-16-04	M16X1.5	6	04	44.7	4.5	23.2	22
20141-16-05	M16X1.5	8	05	45.8	4.5	22.5	22
20141-16-06	M16X1.5	10	06	47.4	4.5	24.1	22
20141-18-05T	M18X1.5	8	05	46.8	4	22.6	24
20141-18-06	M18X1.5	10	06	48.5	4	24.2	24
20141-18-08	M18X1.5	12	08	52.2	4	25.7	24
20141-20-06T	M20X1.5	10	06	48.2	5.5	23.9	27
20141-20-08	M20X1.5	12	08	62.1	5.5	27.2	27
20141-22-06T	M22X1.5	10	06	58.4	5	25.7	27
20141-22-08	M22X1.5	12	08	62.1	5	27.2	27
20141-24-08T	M24X1.5	12	08	61.1	5.5	26.1	30
20141-24-10	M24X1.5	16	10	75.4	5	29.6	30
20141-27-10DT	M27X1.5	16	10	74.4	5.5	29.6	32
20141-27-10T	M27X2	16	10	74.4	5.5	29.6	32
20141-30-12D	M30X1.5	20	12	80.9	6	33.5	36
20141-30-12	M30X2	20	12	80.9	6	33.5	36
20141-36-14T	M36X2	22	14	83	7	32.64	41
20141-39-16T	M39X2	25	16	88.2	7	33.95	46
20141-45-20T	M45X2	32	20	99.1	8.5	38.4	55
20141-52-24T	M52X2	40	24	114.1	9	43.4	60

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 20142-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20142-XX-XX.

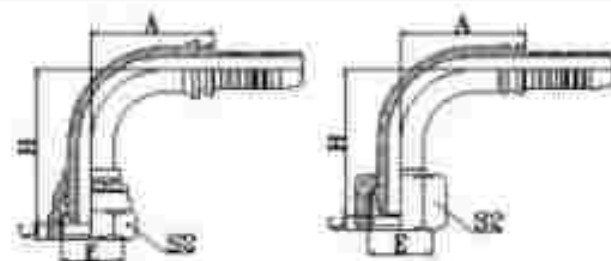

90° 公制内螺纹球面

90° METRIC FEMALE MULTISEAL


20191

20191-T

代 号	螺纹E	尺 寸		A	C	H	S2
		公 称 内 径	标 号				
20191-10-03	M10X1	5	03	27	2.5	35.5	14
20191-12-04	M12X1.5	6	04	30	4	37.5	17
20191-14-04	M14X1.5	6	04	27.5	4.5	38	19
20191-14-05	M14X1.5	8	05	33	4.5	41	19
20191-16-04	M16X1.5	6	04	27.5	4.5	38.5	19
20191-16-05	M16X1.5	8	05	31	4.5	43	22
20191-16-06	M16X1.5	10	06	35.3	4.5	43.8	22
20191-18-05T	M18X1.5	8	05	31	4	43	24
20191-18-06	M18X1.5	10	06	35.3	4	45.3	24
20191-18-08	M18X1.5	12	08	40.5	4	50.5	24
20191-20-06T	M20X1.5	10	06	35.3	5.5	43.8	24
20191-20-08	M20X1.5	12	08	41	5.5	52	27
20191-22-06T	M22X1.5	10	06	35.8	5	76.8	27
20191-22-08	M22X1.5	12	08	42.5	5	54.5	27
20191-24-08T	M24X1.5	12	08	41	5.5	51	30
20191-24-10	M24X1.5	16	10	58	5	58.5	30
20191-27-10DT	M27X1.5	16	10	56	5.5	55.5	32
20191-27-10T	M27X2	16	10	56	5.5	55.5	32
20191-30-12D	M30X1.5	20	12	67.5	6	68.5	36
20191-30-12	M30X2	20	12	67.5	6	68.5	36
20191-36-12T	M36X2	20	12	65.5	7	68	41
20191-36-14T	M36X2	22	14	71.2	7	69	44
20191-39-16T	M39X2	25	16	76.7	7	73.5	44
20191-45-20T	M45X2	32	20	91.5	8.5	85	65.5
20191-52-24T	M52X2	40	24	109.4	9	100	80
20191-64-32T	M64X2	50	32	131.75	14	122.3	75

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20192-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20192-XX-XX.

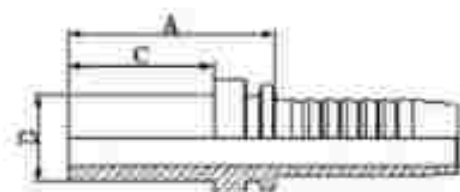


50011
公制卡套式直管
DIN2353
METRIC STANDPIPE STRAIGHT

代 号	管子外径 D	软 管		尺 寸			备 注
		公称内径	标 号	A	C		
50011-06-03	6	5	03	28.5	22		较新系列
50011-06-04	6	6	04	29	22		
50011-10-05	10	8	05	31	23		
50011-10-06	10	10	06	32	23		
50011-12-06	12	10	06	32.5	23		
50011-12-08	12	12	08	33	23		
50011-15-06	15	10	06	35.5	25		
50011-15-08	15	12	08	35.5	25		
50011-18-08	18	12	08	36.5	26		
50011-18-10	18	16	10	41	26		
50011-22-10	22	16	10	44	28		
50011-22-12	22	20	12	44	28		
50011-22-16	22	25	16	46	28		
50011-28-16	28	25	16	47	30		
50011-35-20	35	32	20	56	36		
50011-42-24	42	40	24	62	40		
50011-08-04	8	6	04	31	24		新系列
50011-08-05	8	8	05	33	24		
50011-08-06	8	10	06	33	24		
50011-10-04	10	6	04	33	26		
50011-12-04	12	6	04	34.5	26		
50011-12-05	12	8	05	35.5	26		
50011-14-06	14	10	06	39.5	29		
50011-14-08	14	12	08	40	29		
50011-14-12	14	20	12	45.5	29		
50011-16-08	16	12	08	40.5	30		
50011-16-10	16	16	10	45.5	30		
50011-20-10	20	16	10	52	36		
50011-20-12	20	20	12	52.5	36		
50011-25-12	25	20	12	56	40		
50011-25-16	25	25	16	57	40		
50011-30-16	30	25	16	63	44		
50011-30-20	30	32	20	64	44		
50011-38-16	38	25	16	69	50		
50011-38-20	38	32	20	70	50		

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 50012-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 50012-XX-XX.




50091
90° 公制卡套式直管
90° METRIC STANDPIPE STRAIGHT
DIN2353

代 号	管子外径 D	规 格		尺 寸			备 注
		公称内径	标 号	A	C	H	
50091-06-03	6	5	03	26.3	22	42.5	标准列
50091-06-04	6	6	04	30	22	45.5	
50091-06-05	6	8	05	33	24	50.5	
50091-06-06	6	10	06	35.3	24	52.8	
50091-10-05	10	8	05	33	23	49.5	
50091-10-06	10	10	06	35.3	23	51.8	
50091-12-06	12	10	06	35.3	23	53.8	
50091-12-08	12	12	08	41	23	59	
50091-15-06	15	10	06	35.3	25	53.8	
50091-15-08	15	12	08	41	25	59	
50091-18-08	18	12	08	41	26	60	
50091-18-10	18	16	10	56.3	26	64.5	
50091-22-10	22	16	10	56.3	28	66.5	
50091-22-12	22	20	12	65.3	28	70	
50091-22-16	22	23	16	76.7	28	81.5	
50091-28-16	28	23	16	76.7	30	83.5	
50091-35-20	35	32	20	91	30	100.5	标准列
50091-06-04	6	6	04	30	24	47.5	
50091-10-04	10	6	04	30	26	49.5	
50091-12-04	12	6	04	30	26	49.5	
50091-12-05	12	8	05	33	26	52.5	
50091-14-06	14	10	06	35.3	28	57.8	
50091-14-08	14	12	08	41	28	63	
50091-16-08	16	12	08	41	30	64	
50091-16-10	16	16	10	56.3	30	68.5	
50091-20-10	20	16	10	56.3	36	74.5	
50091-20-12	20	20	12	65.3	36	85	
50091-25-12	25	20	12	65.3	40	89	
50091-25-16	25	23	16	76.7	40	93.5	
50091-30-16	30	23	16	76.7	40	93.5	
50091-30-20	30	32	20	91.5	44	108.5	
50091-36-16	36	23	16	76.7	50	113.5	
50091-36-20	36	32	20	91.5	50	114.5	

注: 1. 上述代号用于编制软管, 2. 如需用于缠绕软管代号改为 50092-xx-xx.

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 50092-XX-XX.

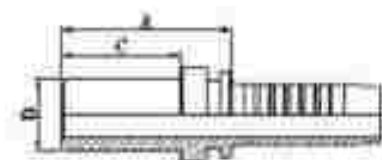

51011


国际卡套式直管

BSP STANDARD PIPE

代 号	管子外径 D	规 格		尺 寸			
		公称内径	标 号		A	C	
51011-04-03	4	5			27	17	
51011-06-03	6	5			30.5	19	
51011-06-04	6	6			31	19	
51011-08-04	8	6			31	19	
51011-08-05	8	8			31.5	19	
51011-08-06	8	10			32	19	
51011-10-04	10	6			35	22	
51011-10-05	10	8			35	22	
51011-10-06	10	10			35	22	
51011-12-05	12	8			35	22	
51011-12-06	12	10			35	22	
51011-14-06	14	10			35	22	
51011-14-08	14	12			35.5	22	
51011-16-06	16	10			35	22	
51011-16-08	16	12			36	22	
51011-16-10	16	16			36.5	22	
51011-16-12	16	20			38	22	
51011-18-12	18	20			41.5	24	
51011-22-12	22	20			45	28	
51011-22-14	22	22			45	28	
51011-28-16	28	25			49	30	
51011-34-20	34	32			53	33	
51011-42-24	42	40			57	35	

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 51012-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 51012-XX-XX.



51091


90° 国际卡套式直管

90°BSP STANDARD PIPE

代 号	管子外径D	软 管		尺 寸			
		公称内径	标 号		A	C	H
51091-06-04	6	6	04		30.5	19	42.5
51091-06-06	6	10	06		35.3	19	47.8
51091-08-04	8	6	04		30	19	42.5
51091-08-05	8	8	05		33	19	45.5
51091-10-04	10	6	04		30	22	45.5
51091-10-06	10	10	06		35.8	22	50.8
51091-12-06	12	10	06		35.3	22	50.8
51091-12-08	12	12	08		41	22	56
51091-14-06	14	10	06		35.3	22	50.8
51091-14-08	14	12	08		41	22	56
51091-15-10	15	16	10		56.5	26	64.5
51091-16-08	16	12	08		42	22	56
51091-16-10	16	16	10		56.5	22	60.5
51091-18-10	18	16	10		56.5	24	62.5
51091-18-12	18	20	12		64.9	24	72
51091-22-14	22	22	14		71.2	28	77
51091-28-16	28	25	16		76.7	30	83.5
51091-34-20	34	32	20		91.5	33	97.5
51091-42-24	42	40	24		109.4	35	113

注:1.上述代号用于编织软管。 2.如需用于缠绕软管代号改为 51092-xx-xx。

NOTE:1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 51092-XX-XX.

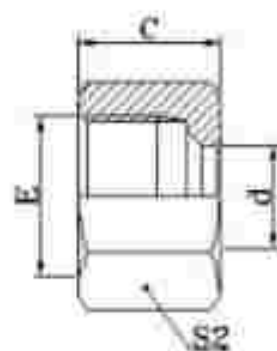


NL

NS

RETAINING NUT L.T.

卡套螺母

代 号	螺纹E	管子外径		尺 寸			压力等级 MPa
				C	D	S2	
NL-12	M12X1.5	6		14.5	6	14	轻系列 L
NL-14	M14X1.5	8		14.5	8	17	
NL-16	M16X1.5	10		15.5	10	19	
NL-18	M18X1.5	12		15.5	12	22	
NL-22	M22X1.5	15		17	15	27	
NL-26	M26X1.5	18		18	18	32	
NL-30	M30X2	22		20	22	36	
NL-30D	M30X1.5	22		19	22	36	
NL-36	M36X2	28		21	28	41	
NL-36D	M36X1.5	28		21	28	41	
NL-45	M45X2	35		24	35	50	
NL-45D	M45X1.5	35		25	35	50	
NL-52	M52X2	42		24	42	60	
NS-14	M14X1.5	6		16.5	6	17	重系列 S
NS-16	M16X1.5	8		16.5	8	19	
NS-18	M18X1.5	10		17.5	10	22	
NS-20	M20X1.5	12		17.5	12	24	
NS-22	M22X1.5	14		20.5	14	27	
NS-24	M24X1.5	16		20.5	16	30	
NS-30	M30X2	20		24	20	36	
NS-36	M36X2	25		27	25	46	
NS-42	M42X2	30		29	30	50	
NS-52	M52X2	38		32.5	38	60	

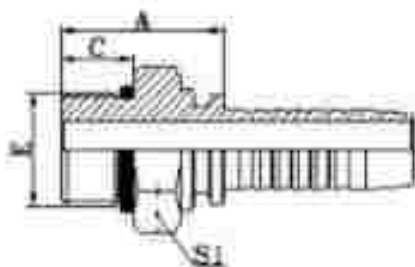

12211


BSP MALE O-RING SEAL

英管外螺纹 O 形圈密封

代 号	管子外径 D	软 管		O 形圈	尺 寸			
		公称内径	标 号		A	C	H	
12211-04-04	G1/4"X19	6	04		24	11	19	
12211-04-06	G1/4"X19	10	06		23.5	11	19	
12211-06-06	G3/8"X19	10	06		26	12	22	
12211-08-04	G1/2"X14	6	04		33.5	14	27	
12211-08-06	G1/2"X14	10	06		33.5	14	27	
12211-08-08	G1/2"X14	12	08		30	14	27	
12211-10-10	G5/8"X14	16	10		34	15.5	30	
12211-12-10	G3/4"X14	16	10		35	15.5	32	
12211-12-12	G3/4"X14	20	12		35	15.5	32	
12211-12-16	G3/4"X14	25	16		36	15.5	32	
12211-16-16	G1"X11	25	16		41	18.5	41	
12211-20-20	G1 1/4"X11	32	20		45	20	50	

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 12212-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 12212-XX-XX.

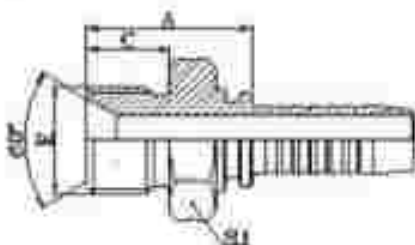

12611


BSP MALE 60° CONE SEAT

英管外螺纹 60° 内锥面

代 号	管子外径 D	管 径			尺 寸			
		公称内径	标 号		A	C	S1	
12611-02-03	G1/8"X28	5	03		22	10	12	
12611-04-04	G1/4"X19	6	04		24	12	14	
12611-06-05	G3/8"X19	8	05		26	13.5	17	
12611-06-06	G3/8"X19	10	06		26	13.5	17	
12611-06-08	G3/8"X19	12	08		26.5	13.5	19	
12611-08-06	G1/2"X14	10	06		30.5	16	22	
12611-08-08	G1/2"X14	12	08		30.5	16	22	
12611-10-08	G5/8"X14	12	08		32.5	17.5	24	
12611-10-10	G5/8"X14	16	10		34	17.5	24	
12611-12-08	G3/4"X14	12	08		35.5	18.5	27	
12611-12-10	G3/4"X14	16	10		37	18.5	27	
12611-12-12	G3/4"X14	20	12		36	18.5	27	
12611-16-12	G1"X11	20	12		40.5	20.5	36	
12611-16-16	G1"X11	25	16		42.5	20.5	36	
12611-20-16	G1.1/4"X11	25	16		43.5	20.5	46	
12611-20-20	G1.1/4"X11	32	20		44.5	20.5	46	
12611-24-20	G1.1/2"X11	32	20		49	23	50	
12611-24-24	G1.1/2"X11	40	24		49	23	50	
12611-32-32	G2"X11	50	32		54.5	28.5	65	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 12612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 12612-XX-XX.

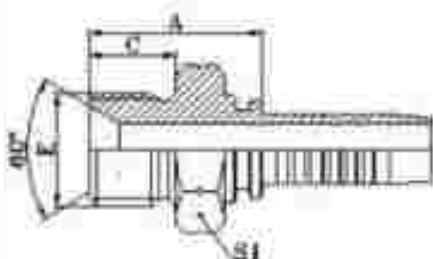

12611A

英管外螺纹 60° 内锥面或六角端面

用组合垫密封的双用接头

BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL


代 号	管子外径 D	就 管			尺 寸			
		公称内径	标 号		A	C	S1	
12611A-03-03	G1/8"X28	5	03		22	10	14	
12611A-04-04	G1/4"X19	6	04		25	12	19	
12611A-04-05	G3/8"X19	8	05		25	12	19	
12611A-06-05	G3/8"X19	8	05		26	13.5	22	
12611A-06-06	G3/8"X19	10	06		27.5	13.5	22	
12611A-06-08	G3/8"X19	12	08		28.5	13.5	22	
12611A-08-06	G1/2"X14	10	06		33	16	27	
12611A-08-08	G1/2"X14	12	08		32	16	27	
12611A-08-10	G1/2"X14	16	10		32	16	27	
12611A-10-08	G5/8"X14	12	08		35	17.5	30	
12611A-10-10	G5/8"X14	16	10		36	17.5	30	
12611A-12-08	G3/4"X14	12	08		36.5	18.5	32	
12611A-12-10	G3/4"X14	16	10		37.5	18.5	32	
12611A-12-12	G3/4"X14	20	12		38	18.5	32	
12611A-16-12	G1"X11	20	12		42.5	20.5	41	
12611A-16-16	G1"X11	25	16		43	20.5	41	
12611A-20-16	G1 1/4"X11	25	16		45.5	20.5	50	
12611A-20-20	G1 1/4"X11	32	20		45.5	20.5	50	
12611A-24-24	G1 1/2"X11	40	24		50	23	55	
12611A-32-22	G2"X11	50	32		54.5	25.5	70	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 12612A-xx-xx。


NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 12612A-XX-XX.



22611

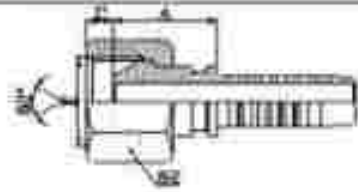

22611-T

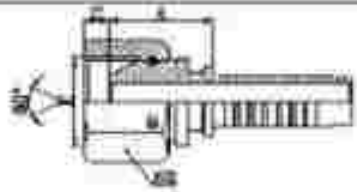


22611-W

英管内螺纹 60° 外锥面

BSP FEMALE 60° CONE

代 号	管子外径 D	软管			尺 寸			
		公称内径	标 号		A	C	S2	
22611-02-03	G1/8"X28	5	03		15	5.5	14	
22611-02-04	G1/8"X28	6	04		17.5	5.5	14	
22611-04-03	G1/4"X19	5	03		17	5.5	19	
22611-04-04	G1/4"X19	6	04		19	5.5	19	
22611-04-05	G1/4"X19	8	05		19	5.5	19	
22611-04-06	G1/4"X19	10	06		19	5.5	19	
22611-06-04	G3/8"X19	6	04		21	6.3	22	
22611-06-05	G3/8"X19	8	05		21	6.3	22	
22611-06-06	G3/8"X19	10	06		21	6.3	22	
22611-06-08	G3/8"X19	12	08		21.5	6.3	22	
22611-08-06T	G1/2"X14	10	06		21	7.5	27	
22611-08-08	G1/2"X14	12	08		23	7.5	27	
22611-10-08	G5/8"X14	12	08		23.5	9.5	30	
22611-10-10	G5/8"X14	16	10		24.5	9.5	30	
22611-12-08T	G3/4"X14	12	08		22	10.9	32	
22611-12-10	G3/4"X14	16	10		24.5	10.9	32	
22611-12-12	G3/4"X14	20	12		24.5	10.9	32	
22611-16-12T	G1"X11	20	12		24	11.7	41	
22611-16-14	G1"X11	22	14		26	11.7	41	
22611-16-16	G1"X11	25	16		27.5	11.7	41	
22611-20-16T	G1.1/4"X11	25	16		27.5	11	50	
22611-20-20W	G1.1/4"X11	32	20		30.5	11	50	
22611-24-20T	G1.1/2"X11	32	20		32	13	55	
22611-24-24W	G1.1/2"X11	40	24		32	13	55	
22611-32-24T	G2"X11	40	24		30	16	70	
22611-32-32W	G2"X11	50	32		31.9	16	70	

注: 1. 上述代号用于编制软管。 2. 如用于螺旋软管代号改为 22612-XX-XX。
NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 22612-XX-XX.

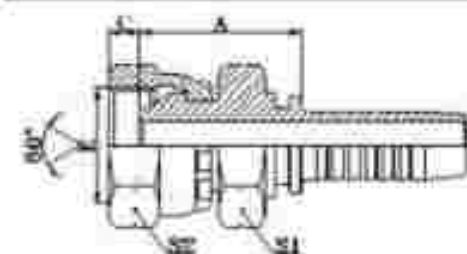

22611D


英管内螺纹 60° 外锥面双六角

BSP FEMALE 60° CONE DOUBLE HEXAGON

代 号	管子外径 D	规 格			尺 寸			
		公称内径	标 号		A	C	S1	S2
22611D-04-04	G1/4"X19	6	04		24.5	5.5	19	19
22611D-06-06	G3/8"X19	10	06		27	6.3	22	22
22611D-08-08	G1/2"X14	12	08		30.5	7.5	27	27
22611D-10-08	G5/8"X14	12	08		31	9.5	30	30
22611D-12-08	G3/4"X14	12	08		31.5	10.9	32	32
22611D-12-12	G3/4"X14	20	12		34.5	10.9	32	32
22611D-16-16	G1"X11	25	16		38.5	11.7	41	41
22611D-20-20W	G1.1/4"X11	32	20		44	11	50	50

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 22612D-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22612D-XX-XX.

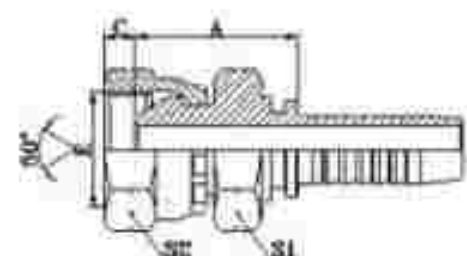

22611D-SM


英管内螺纹 60° 外锥面双六角

BSP FEMALE 60° CONE DOUBLE HEXAGON


代 号	管子外径 D	规 格			尺 寸			
		公称内径	标 号		A	C	S1	S2
22611D-04-04SM	G1/4"X19	6	04		23.5	5.5	12	19
22611D-06-06SM	G3/8"X19	10	06		24.5	6.3	17	22
22611D-08-08SM	G1/2"X14	12	08		29	7.5	22	27
22611D-10-08SM	G5/8"X14	12	08		29	9.5	22	30
22611D-12-08SM	G3/4"X14	12	08		31.5	10.9	27	32
22611D-12-12SM	G3/4"X14	20	12		33.5	10.9	27	32
22611D-16-16SM	G1"X11	25	16		35.5	11.7	32	41
22611D-20-20SM	G1.1/4"X11	32	20		42	11	41	50

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 22612D-xx-xxSM。


NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22612D-XX-XXSM.

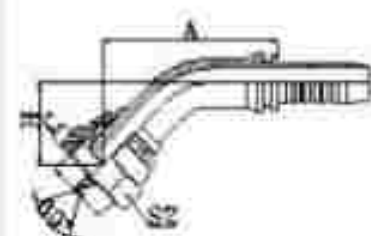

22641

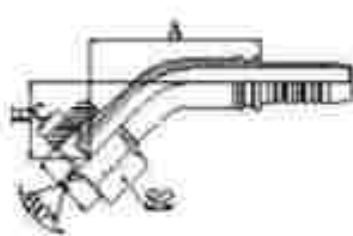

22641-T

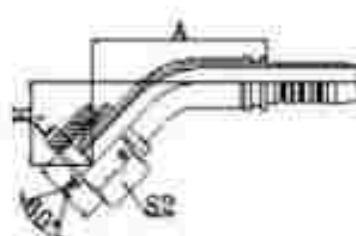

22641-W


45° 英管内螺纹 60° 外锥面

45°BSP FEMALE 60°CONE


代 号	管子外径 D	软 管			尺 寸			
		公称内径	标 号		A	C	H	S2
22641-04-04	G1/4"X19	6	04		40	5.5	21	19
22641-06-04	G3/8"X19	6	04		43.2	6.3	21	22
22641-06-05	G3/8"X19	8	05		45.3	6.3	22	22
22641-06-06	G3/8"X19	10	06		47	6.3	24	22
22641-08-06T	G1/2"X14	10	06		48.1	7.5	23.9	27
22641-08-08	G1/2"X14	12	08		49.5	7.5	27	27
22641-10-08	G5/8"X14	12	08		61.4	9.5	26.5	30
22641-10-10	G5/8"X14	16	10		63	9.5	29	30
22641-12-08T	G3/4"X14	12	08		61.8	10.9	26.9	32
22641-12-10	G3/4"X14	16	10		63	10.9	29	32
22641-12-12	G3/4"X14	20	12		75.5	10.9	32	32
22641-16-12T	G1"X11	20	12		80.8	11.7	33.4	41
22641-16-16	G1"X11	25	16		86	11.7	34	41
22641-20-16T	G1 1/4"X11	25	16		85.3	11	31.1	50
22641-20-20W	G1 1/4"X11	32	20		98.8	11	38	50
22641-24-24W	G1 1/2"X11	40	24		116.8	13	45.5	55
22641-32-32W	G2"X11	50	32		135.7	16	52.7	70

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 22642-xx-xx。


NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22642-XX-XX.

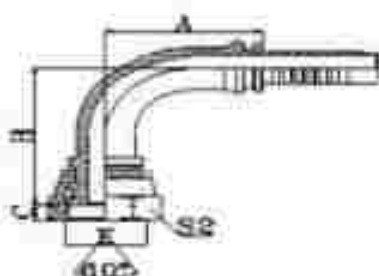

22691

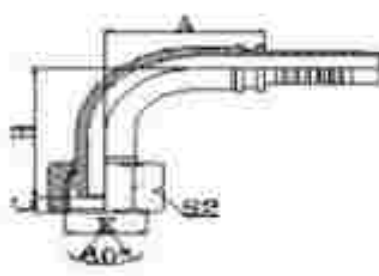

22691-T

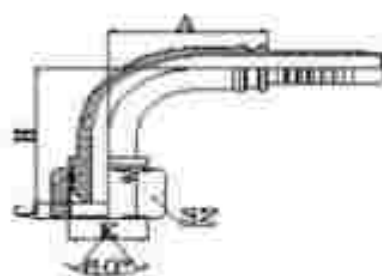

22691-W

90° 英管内螺纹 60° 外锥面

90°BSP FEMALE 60°CONE

代 号	管子外径D	软 管			尺 寸			
		公称内径	标 号		A	C	H	S2
22691-02-03	G1/8"X28	5	03		26.5	5.5	31.5	14
22691-02-04	G1/8"X28	6	04		27.5	5.5	35.5	14
22691-04-03	G1/4"X19	5	03		26.5	5.5	33.5	19
22691-04-04	G1/4"X19	6	04		27.5	5.5	37	19
22691-04-05	G1/4"X19	8	05		31	5.5	41.5	19
22691-04-06	G1/4"X19	10	06		30	5.5	36.5	19
22691-06-04	G3/8"X19	6	04		27.5	6.3	39	22
22691-06-05	G3/8"X19	8	05		31	6.3	43.5	22
22691-06-06	G3/8"X19	10	06		33	6.3	44.5	22
22691-08-06T	G1/2"X14	10	06		35.3	7	43.3	27
22691-08-08	G1/2"X14	12	08		42.5	7.5	53	27
22691-08-10	G1/2"X14	16	10		56.5	7.5	55.5	27
22691-10-08	G5/8"X14	12	08		42.5	9.5	53.5	30
22691-10-10	G5/8"X14	16	10		48.5	9.5	58	30
22691-12-08T	G3/4"X14	12	08		41	10.9	52.1	32
22691-12-10	G3/4"X14	16	10		48.5	10.9	58	32
22691-12-12	G3/4"X14	20	12		50.5	10.9	66	32
22691-16-12T	G1"X11	20	12		65.5	11.7	68.3	41
22691-16-14	G1"X11	22	14		71.2	11.7	69.3	41
22691-16-16	G1"X11	25	16		66	11.7	78.5	41
22691-20-16T	G1.1/4"X11	25	16		78	11	69.5	50
22691-20-20W	G1.1/4"X11	32	20		91.5	11	84.3	50
22691-24-24W	G1.1/2"X11	40	24		109.4	13	103	55
22691-32-32W	G2"X11	50	32		131.8	16	123.3	70

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 22692-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22692-XX-XX.

22691 K


BSP FEMALE CONE DOUBLE HEXAGON

90° 英管短身内螺纹 60° 外锥面


代 号	管子外径 D	软 管		尺 寸				
		公称内径	标 号	A	C	H	S1	S2
22691K-04-04	G1/4"X19	6	04	17.5	5.5	18.5	11	19
22691K-06-04	G3/8"X19	6	04	20	6.3	24	16	22
22691K-06-05	G3/8"X19	8	05	20	6.3	24	16	22
22691K-06-06	G3/8"X19	10	06	20	6.3	24	16	22
22691K-08-06	G1/2"X14	10	06	23	7.5	28.5	19	27
22691K-08-08	G1/2"X14	12	08	23.5	7.5	28.5	19	27
22691K-10-10	G5/8"X14	16	10	24.5	9.5	30.5	22	30
22691K-12-12	G3/4"X14	20	12	27.5	10.9	33	27	32
22691K-16-16	G1"X11	25	16	43	11.7	38.5	33	41

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 22692K-xx-xx。


NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22692K-XX-XX.



22111



22111-T



22111-W


英管内螺纹球面

BSP FEMALE MULTISEAL


代 号	螺纹E	软管			尺 寸			
		公称内径	标 号		A	C	S2	
22111-02-04	G1/8"X28	6	04		19	2	14	
22111-04-03	G1/4"X19	5	03		19	4	19	
22111-04-04	G1/4"X19	6	04		20.5	4	19	
22111-06-05	G3/8"X19	8	05		20	5	22	
22111-06-06	G3/8"X19	10	06		22.5	5	22	
22111-06-08	G3/8"X19	12	08		21	5	22	
22111-08-06T	G1/2"X14	10	06		22.5	6	27	
22111-08-08	G1/2"X14	12	08		25.5	6	27	
22111-08-10	G1/2"X14	16	10		24	6	27	
22111-10-10	G5/8"X14	16	10		26	8	30	
22111-10-12	G5/8"X14	20	12		25	8	30	
22111-12-08T	G3/4"X14	12	08		25	9.5	32	
22111-12-10	G3/4"X14	16	10		26	9.5	32	
22111-12-12	G3/4"X14	20	12		26	9.5	32	
22111-16-12T	G1"X11	20	12		26.5	11	41	
22111-16-14	G1"X11	22	14		26.5	11	41	
22111-16-16	G1"X11	25	16		28.5	11	41	
22111-20-16T	G1.1/4"X11	25	16		27.5	11	50	
22111-20-20W	G1.1/4"X11	32	20		31.5	10	50	
22111-24-24W	G1.1/2"X11	40	24		37	11.5	55	
22111-32-32W	G2"X11	50	32		34	15	70	

注: 1. 上述代号用于编织软管; 2. 如需用于螺旋软管代号改为 22212-xx-xx.


NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22212-XX-XX.

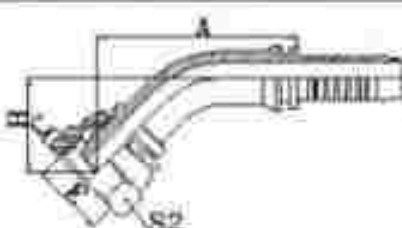

22141

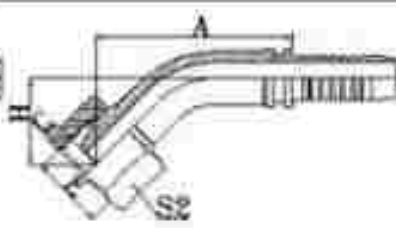

22141-T

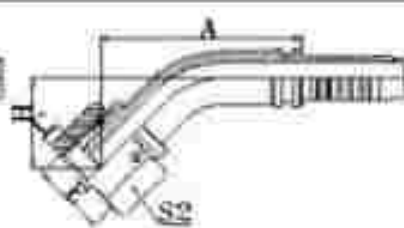

22141-W


45° 英管内螺纹球面

45°BSP FEMALE MULTISEAL


代 号	螺纹E	软管			尺 寸			
		公称内径	标 号		A	C	H	S2
22141-02-04	G1/8"X28	6	04		43.7	2	21.6	14
22141-04-03	G1/4"X19	5	03		41.3	4	20.4	19
22141-04-04	G1/4"X19	6	04		43.7	4	21.6	19
22141-06-05	G3/8"X19	8	05		46.2	5	22.9	22
22141-06-06	G3/8"X19	10	06		48.1	5	23.9	22
22141-06-08	G3/8"X19	12	08		60.4	5	25.4	22
22141-08-04T	G1/2"X14	6	04		43.9	6	23.8	27
22141-08-06T	G1/2"X14	10	06		42.5	6	18.2	27
22141-08-08	G1/2"X14	12	08		61.8	6	26.8	27
22141-08-10	G1/2"X14	16	10		73	6	29	27
22141-10-10	G5/8"X14	16	10		73.7	8	28.9	30
22141-10-12	G5/8"X14	20	12		79.8	8	32.5	30
22141-12-08T	G3/4"X14	12	08		63.2	9.5	28.3	32
22141-12-10	G3/4"X14	16	10		70.4	9.5	29.6	32
22141-12-12	G3/4"X14	20	12		80.6	9.5	33.2	32
22141-16-12	G1"X11	20	12		81.6	11	33.5	41
22141-16-14	G1"X11	22	14		83.3	11	35	41
22141-16-16	G1"X11	25	16		89.2	11	35	41
22141-20-16T	G1.1/4"X11	25	16		91.4	9.1	37.1	50
22141-20-20W	G1.1/4"X11	32	20		102.9	10	41.2	50
22141-24-24W	G1.1/2"X11	40	24		119.8	11.5	49	53
22141-32-32W	G2"X11	50	32		137.4	15	53	70

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 22142-xx-xx。


NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22142-XX-XX.

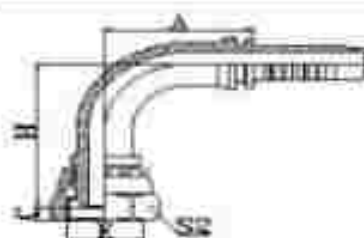

22191

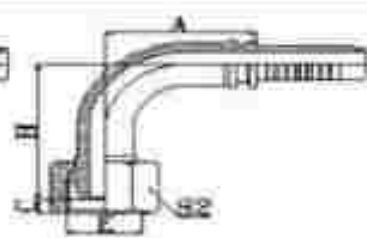

22191-T

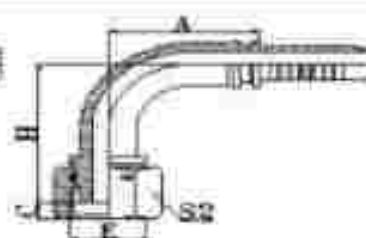

22191-W

90° 英管内螺纹球面

90°BSP FEMALE MULTISEAL

代 号	螺纹E	软管			尺 寸			
		公称内径	标 号		A	C	H	S2
22191-02-04	G1/8"X28	6	04		30	2	38	14
22191-04-03	G1/4"X19	5	03		27	4	35	19
22191-04-04	G1/4"X19	6	04		30	4	38	19
22191-04-05	G1/4"X19	8	05		33	4	41.5	19
22191-06-05	G3/8"X19	8	05		33	5	42	22
22191-06-06	G3/8"X19	10	06		35.3	5	44.3	22
22191-06-08	G3/8"X19	12	08		41	5	50	22
22191-08-06T	G1/2"X14	10	06		35.3	6	46.8	27
22191-08-08	G1/2"X14	12	08		41	6	52.5	27
22191-10-10	G5/8"X14	16	10		56.5	8	57.5	30
22191-10-12	G5/8"X14	20	12		65.5	8	67	30
22191-12-08T	G3/4"X14	12	08		41	9.5	52	32
22191-12-10	G3/4"X14	16	10		56.5	9.5	58.5	32
22191-12-12	G3/4"X14	20	12		65.5	9.5	68	32
22191-16-12T	G1"X11	20	12		66.2	11	68.5	41
22191-16-14	G1"X11	22	14		71.2	11	69.5	41
22191-16-16	G1"X11	25	16		76.7	11	75	41
22191-20-16T	G1 1/4"X11	25	16		76.7	10	78	50
22191-20-20W	G1 1/4"X11	32	20		92.3	10	85.3	50
22191-24-24W	G1 1/2"X11	40	24		109.4	11.5	108	55
22191-32-32W	G2"X11	50	32		133.1	15	123.8	70

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 22192-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 22192-XX-XX.



13011-SP


英锥管外螺纹

BSP MALE

代 号	螺纹E	软 管			尺 寸			
		公称内径	标 号		A	C	S1	
13011-02-03SP	R1/8"X28	5	03		22	10	12	
13011-02-04SP	R1/8"X28	6	04		22.5	10	12	
13011-04-04SP	R1/4"X19	6	04		27	14.5	14	
13011-04-05SP	R1/4"X19	8	05		25	15.4	14	
13011-04-06SP	R1/4"X19	10	06		27	14.5	17	
13011-06-04SP	R3/8"X19	6	04		27.5	15	17	
13011-06-05SP	R3/8"X19	8	05		26.5	15	17	
13011-06-06SP	R3/8"X19	10	06		27.5	15	17	
13011-06-08SP	R3/8"X19	12	08		30	15	19	
13011-08-06SP	R1/2"X14	10	06		34.5	20	22	
13011-08-08SP	R1/2"X14	12	08		35	20	22	
13011-08-10SP	R1/2"X14	16	10		38	20	22	
13011-08-12SP	R1/2"X14	20	12		38	20	27	
13011-12-08SP	R3/4"X14	12	08		37	20	27	
13011-12-10SP	R3/4"X14	16	10		38	20	27	
13011-12-12SP	R3/4"X14	20	12		38.5	20	27	
13011-12-16SP	R3/4"X14	25	16		39.5	20	32	
13011-16-12SP	R1"X11	20	12		44	25.5	36	
13011-16-16SP	R1"X11	25	16		45	25.5	36	
13011-20-20SP	R1.1/4"X11	32	20		49.5	26.5	46	
13011-24-24SP	R1.1/2"X11	40	24		52.5	26.5	50	
13011-32-24SP	R2"X11	40	24		57	30	65	
13011-32-32SP	R2"X11	50	32		59	30	65	

注:1.上述代号用于编制软管。 2.如需用于缠绕软管代号改为13012-xx-xxSP。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 13012-XX-XXSP.

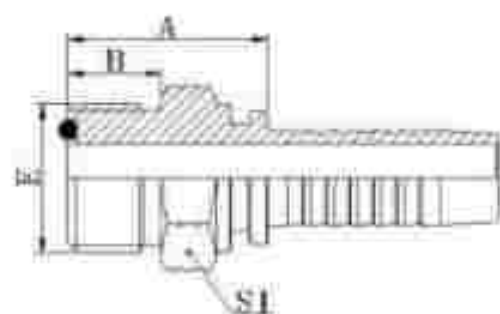

14211

美制 ORFS 外螺纹平面 O 形圈


ISO 8434-3—SAE J1453

ORFS MALE O-RING SEAL

代 号	螺纹号	软管		O 形圈	尺 寸			
		公称内径	标 号		A	C	S1	
14211-04-04	9/16"X18	6	04	O011	22.3	9.8	17	
14211-06-04	11/16"X16	6	04	O012	24.2	11.2	19	
14211-06-06	11/16"X16	10	06	O012	24.2	11.2	19	
14211-08-06	13/16"X16	10	06	O014	26.8	12.8	22	
14211-08-08	13/16"X16	12	08	O014	27.3	12.8	22	
14211-08-10	13/16"X16	16	10	O014	28.5	12.8	22	
14211-10-08	1"X14	12	08	O016	31.5	15.5	27	
14211-10-10	1"X14	16	10	O016	33	15.5	27	
14211-12-08	1 3/16"X12	12	08	O018	36.5	17	32	
14211-12-10	1 3/16"X12	16	10	O018	36	17	32	
14211-12-12	1 3/16"X12	20	12	O018	36.5	17	32	
14211-16-12	1 7/16"X12	20	12	O021	37	17.5	38	
14211-16-16	1 7/16"X12	25	16	O021	39.5	17.5	38	
14211-20-20	1 11/16"X12	32	20	O025	41.5	17.5	46	
14211-24-24	2"X12	40	24	O029	44.5	17.5	55	

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 14212-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 14212-XX-XX.

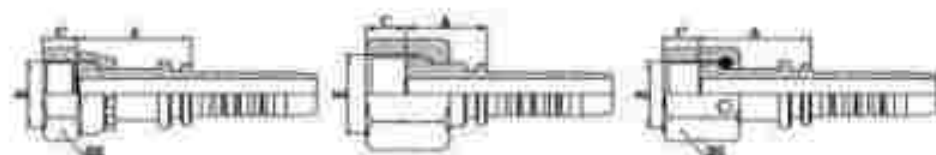

24211

24211-T


24211-W

美制 ORFS 内螺纹平面
ORFS FEMALE FLAT SEAT
ISO 12151-1—SAE J516

代 号	螺纹E	软管			尺 寸			
		公称内径	标 号		A	H	S2	
24211-04-04	9/16"X18	6	04		25.5	8.5	19	
24211-04-05	9/16"X18	8	05		22.5	8.5	19	
24211-04-06	9/16"X18	10	06		22.5	8.5	19	
24211-06-04T	11/16"X16	6	04		23.5	10	22	
24211-06-05T	11/16"X16	8	05		23.5	10	22	
24211-06-06	11/16"X16	10	06		26.5	10	22	
24211-06-08	11/16"X16	12	08		26	10	22	
24211-08-05T	13/16"X16	8	05		25	11	27	
24211-08-06T	13/16"X16	10	06		24.5	11	27	
24211-08-08	13/16"X16	12	08		28	11	27	
24211-08-10	13/16"X16	16	10		29	11	27	
24211-10-08T	1"X14	12	08		29	13.5	30	
24211-10-10	1"X14	16	10		34	13.5	30	
24211-10-12	1"X14	20	12		34	13.5	30	
24211-12-08T	1.3/16"X12	12	08		30.5	15	36	
24211-12-10T	1.3/16"X12	16	10		32.5	15	36	
24211-12-12	1.3/16"X12	20	12		36.5	15	36	
24211-12-16	1.3/16"X12	25	16		36	15	36	
24211-16-12T	1.7/16"X12	20	12		32.5	14.8	41	
24211-16-14T	1.7/16"X12	22	14		35	14.8	41	
24211-16-16T	1.7/16"X12	25	16		34.3	14.8	41	
24211-16-20	1.7/16"X12	32	20		39.5	14.8	41	
24211-20-16T	1.11/16"X12	25	16		34.5	15	50	
24211-20-20W	1.11/16"X12	32	20		42.5	15	50	
24211-20-24W	1.11/16"X12	40	24		42.5	15	50	
24211-24-20T	2"X12	32	20		36	14.8	60	
24211-24-24T	2"X12	40	24		37.2	14.8	60	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 24212-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 24212-XX-XX

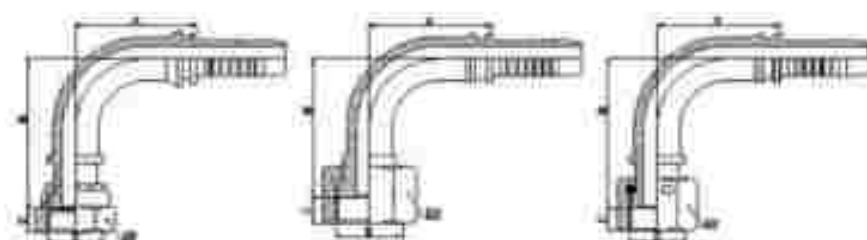

24291

24291-T


24291-W

90° 美制 ORFS 内螺纹平面
90°ORFS FEMALE FLAT SEAT
ISO 12151-1—SAE J516

代 号	螺纹尺寸	规 格			尺 寸			
		公称内径	标 号		A	B	C	S2
24291-04-04	9/16"X18	8	04		27.5	43.5	8.5	19
24291-04-08	9/16"X18	8	08		33	44	8.5	19
24291-06-05.1	11/16"X16	8	05		33	37.5	10	22
24291-06-06	11/16"X16	10	06		33	50	10	22
24291-08-08	11/16"X16	12	08		42.5	55	10	22
24291-08-08.3	13/16"X16	10	06		33.3	39.8	11	27
24291-08-08	13/16"X16	12	08		41	58	11	27
24291-08-10	13/16"X16	16	10		56.5	61.5	11	27
24291-10-08.1	1"X14	12	08		41	46	13.5	30
24291-10-10	1"X14	16	10		48.5	62.5	13.5	30
24291-10-12	1"X14	20	12		50.5	75.5	13.5	30
24291-12-10.1	1.3/16"X12	16	10		56	51.5	15	36
24291-12-12	1.3/16"X12	20	12		65.5	78	15	36
24291-12-16	1.3/16"X12	25	16		76.7	83.5	15	36
24291-16-12.1	1.7/16"X12	20	12		65.5	63	14.8	41
24291-16-14.1	1.7/16"X12	22	14		71.2	63	14.8	41
24291-16-16.1	1.7/16"X12	25	16		76.9	67.3	14.8	41
24291-20-16.1	1.11/16"X12	25	16		76.7	67.5	15	50
24291-20-20W	1.11/16"X12	32	20		93	100	15	50
24291-24-20.1	2"X12	32	20		91.5	78.5	14.8	60
24291-24-24.1	2"X12	40	24		109.4	92	14.8	60

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 24292-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 24292-XX-XX.

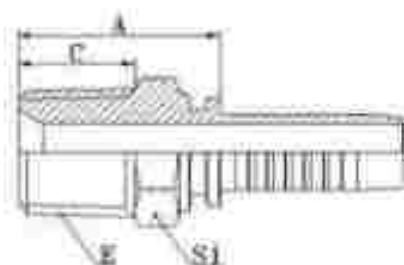

15611


美制布锥管外螺纹

NPT MALE

代 号	螺纹 E	软 管			尺 寸			
		公称内径	标 号		A	C	S1	
15611-02-03	Z1/8"X27	5	03		21.5	10.5	12	
15611-02-04	Z1/8"X27	6	04		22.5	10.5	12	
15611-04-03	Z1/4"X18	5	03		27	15	17	
15611-04-04	Z1/4"X18	6	04		27.5	15	17	
15611-04-05	Z1/4"X18	8	05		27.5	15	17	
15611-04-06	Z1/4"X18	10	06		27.5	15	17	
15611-06-04	Z3/8"X18	6	04		29	16	19	
15611-06-05	Z3/8"X18	8	05		29	16	19	
15611-06-06	Z3/8"X18	10	06		29	16	19	
15611-06-08	Z3/8"X18	12	08		29.5	16	19	
15611-08-06	Z1/2"X14	10	06		31.5	19.5	22	
15611-08-08	Z1/2"X14	12	08		34	19.5	22	
15611-08-10	Z1/2"X14	16	10		35.5	19.5	22	
15611-12-08	Z3/4"X14	12	08		37	19.5	27	
15611-12-10	Z3/4"X14	16	10		37	19.5	27	
15611-12-12	Z3/4"X14	20	12		38.5	19.5	27	
15611-12-16	Z3/4"X14	25	16		39.5	19.5	32	
15611-16-10	Z1"X11.5	16	10		45	25.5	36	
15611-16-12	Z1"X11.5	20	12		45	25.5	36	
15611-16-16	Z1"X11.5	25	16		47.5	25.5	36	
15611-20-16	Z1.1/4"X11.5	25	16		49	26.5	46	
15611-20-20	Z1.1/4"X11.5	32	20		50.5	26.5	46	
15611-24-24	Z1.1/2"X11.5	40	24		53.5	27.5	50	
15611-32-32	Z2"X11.5	50	32		56.5	27.5	65	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 15612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 15612-XX-XX.

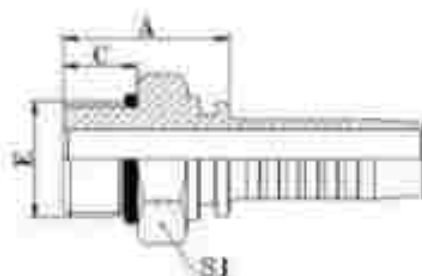

16011

美制 SAE 外螺纹带 O 形圈


SAE O-RING SEAL

ISO 11962-SAE J1926

代 号	螺纹 E	软 管		O 形圈	尺 寸			
		公称内径	标 号		A	C	S1	
16011-04-04	7/16"X20	6	04	O904	21.5	9.1	14	
16011-05-04	1/2"X20	6	04	O905	21.5	9.1	17	
16011-06-05	9/16"X18	8	05	O906	22.5	9.9	17	
16011-06-06	9/16"X18	10	06	O906	22.5	9.9	17	
16011-08-06	3/4"X16	10	06	O908	23.5	11.1	22	
16011-08-08	3/4"X16	12	08	O908	24	11.1	22	
16011-10-08	7/8"X14	12	08	O910	30	12.7	27	
16011-10-10	7/8"X14	16	10	O910	31	12.7	27	
16011-12-10	1 1/16"X12	16	10	O912	34	15.1	32	
16011-12-12	1 1/16"X12	20	12	O912	34	15.1	32	
16011-16-16	1 5/16"X12	25	16	O916	36	15.1	38	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 16012-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 16012-XX-XX.

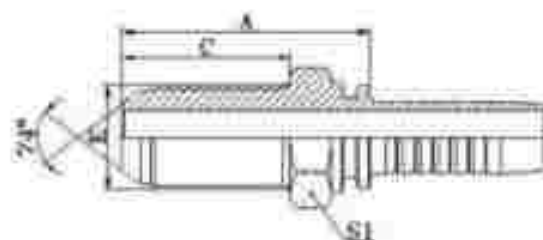

16711L

JIC 74°MALE CONE SEAL LONGER

美制 JIC 外螺纹 74° 外锥面

代 号	螺 纹 规 格	规 格			尺 寸			
		公称内径	标 号		A	C	S1	
16711L-04-04	7/16"X20	6	04		43	30.5	17	
16711L-05-04	1/2"X20	6	04		43	30.5	19	
16711L-05-05	1/2"X20	8	05		43	30.5	19	
16711L-06-04	9/16"X18	6	04		47	32.5	22	
16711L-06-05	9/16"X18	8	05		47	32.5	22	
16711L-06-06	9/16"X18	10	06		47	32.5	22	
16711L-08-06	3/4"X16	10	06		51	36.5	24	
16711L-08-08	3/4"X16	12	08		51.5	36.5	24	
16711L-10-06	7/8"X14	10	06		56.5	40	30	
16711L-10-08	7/8"X14	12	08		57	40	30	
16711L-10-10	7/8"X14	16	10		58	40	30	
16711L-12-08	1.1/16"X12	12	08		63	44.5	36	
16711L-12-10	1.1/16"X12	16	10		64	44.5	36	
16711L-12-12	1.1/16"X12	20	12		64	44.5	36	
16711L-16-12	1.5/16"X12	20	12		66	44.5	41	
16711L-16-16	1.5/16"X12	25	16		67	44.5	41	
16711L-20-16	1.5/8"X12	25	16		70.5	45.7	50	
16711L-20-20	1.5/8"X12	32	20		71.2	45.7	50	
16711L-24-20	1.7/8"X12	32	20		71.5	46	55	
16711L-24-24	1.7/8"X12	40	24		71.5	46	55	




16711
美制 JIC 外螺纹 74° 外锥面
JIC 74° MALE CONE SEAL

代 号	螺纹 E	规 格			尺 寸			
		公称内径	标 号		A	C	S1	
16711-04-03	7/16"X20	5	03		26	14	12	
16711-04-04	7/16"X20	6	04		26	14	12	
16711-05-04	1/2"X20	6	04		26	14	14	
16711-05-05	1/2"X20	8	05		26	14	14	
16711-05-06	1/2"X20	10	06		26.5	14	17	
16711-06-04	9/16"X18	6	04		26.6	14.1	17	
16711-06-05	9/16"X18	8	05		26.6	14.1	17	
16711-06-06	9/16"X18	10	06		26.6	14.1	17	
16711-08-06	3/4"X16	10	06		30.7	16.7	22	
16711-08-08	3/4"X16	12	08		31.2	16.7	22	
16711-10-06	7/8"X14	10	06		34.3	19.3	24	
16711-10-08	7/8"X14	12	08		34	19.3	24	
16711-10-10	7/8"X14	16	10		35.8	19.3	24	
16711-12-08	1.1/16"X12	12	08		38.5	21.9	30	
16711-12-10	1.1/16"X12	16	10		39.4	21.9	30	
16711-12-12	1.1/16"X12	20	12		39.4	21.9	30	
16711-12-16	1.1/16"X12	25	16		42	21.9	30	
16711-14-10	1.3/16"X12	16	10		41.5	22.6	32	
16711-14-12	1.3/16"X12	20	12		40.3	22.6	32	
16711-16-12	1.5/16"X12	20	12		43.6	23.1	36	
16711-16-16	1.5/16"X12	25	16		45.1	23.1	36	
16711-20-16	1.5/8"X12	25	16		47	24.3	46	
16711-20-20	1.5/8"X12	32	20		48.3	24.3	46	
16711-24-20	1.7/8"X12	32	20		53	27.5	50	
16711-24-24	1.7/8"X12	40	24		53.5	27.5	50	
16711-32-32	2.1/2"X12	50	32		62.9	33.9	65	

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 16712-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 16712-XX-XX.

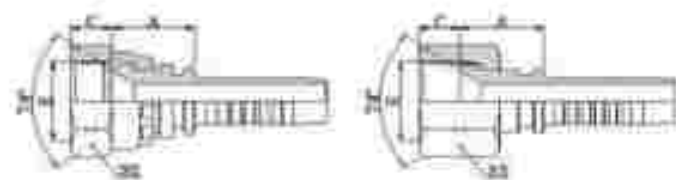

美制 JIC 外螺纹 74° 内锥面

26711


26711-T

JIC FEMALE 74° CONE SEAT

代 号	规格	管 径			尺 寸			
		公称内径	标 号		A	C	S2	
26711-04-03	7/16"X20	5	03		14.5	9	15	
26711-04-04	7/16"X20	6	04		15	9	15	
26711-05-04	1/2"X20	6	04		16	9.5	17	
26711-05-05	1/2"X20	8	05		16	9.5	17	
26711-05-06	1/2"X20	10	06		16.5	9.5	17	
26711-06-04	9/16"X18	6	04		16.5	10.5	19	
26711-06-05	9/16"X18	8	05		16	10.5	19	
26711-06-06	9/16"X18	10	06		16.5	10.5	19	
26711-06-08	9/16"X18	12	08		16	10.5	19	
26711-08-06	3/4"X16	10	06		18	11	24	
26711-08-08	3/4"X16	12	08		18.5	11	24	
26711-08-10	3/4"X16	16	10		19.5	11	24	
26711-10-08	7/8"X14	12	08		19.5	13	27	
26711-10-10	7/8"X14	16	10		20.5	13	27	
26711-10-12	7/8"X14	20	12		20	13	7	
26711-12-08	1-1/16"X12	12	08		19	15	32	
26711-12-10	1-1/16"X12	16	10		21.5	15	32	
26711-12-12	1-1/16"X12	20	12		21.5	15	32	
26711-12-16	1-1/16"X12	25	16		23.5	15	32	
26711-14-12	1-3/16"X12	20	12		21.5	15	36	
26711-16-12	1-5/16"X12	20	12		18.5	16	41	
26711-16-16	1-5/16"X12	25	16		24.5	16	41	
26711-16-20	1-5/16"X12	32	20		24	16	41	
26711-20-16	1-5/8"X12	25	16		23	17	50	
26711-20-20	1-5/8"X12	32	20		26	17	50	
26711-24-20	1-7/8"X12	32	20		26.5	20	55	
26711-24-24	1-7/8"X12	40	24		26.5	20	55	
26711-32-24	2-1/2"X12	40	24		27	23.5	75	
26711-32-32	2-1/2"X12	50	32		27	23.5	75	

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 26712-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 26712-XX-XX.

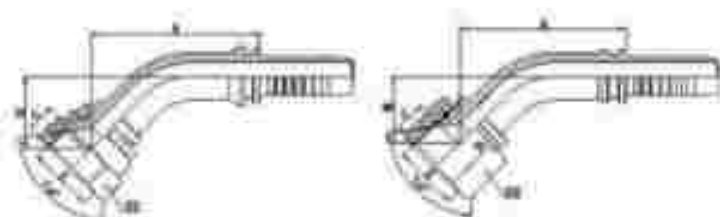

45° 美制 JIC 内螺纹
74° 内锥面 SAE J514
45° JIC FEMALE 74° CONE
SEAT


26741

26741-W

代 号	螺 纹 主	款 型			尺 寸			
		公称内径	标 号		A	C	H	S2
26741-04-03	7/16"X20	5	03		37.6	9	17.2	15
26741-04-04	7/16"X20	6	04		37	9	18	15
26741-05-04	1/2"X20	6	04		40.5	9.5	18.5	17
26741-05-05	1/2"X20	8	05		41.5	9.5	20	17
26741-05-06	1/2"X20	10	06		44.6	9.5	20.3	17
26741-06-04	9/16"X18	6	04		40.5	10.5	18.5	19
26741-06-05	9/16"X18	8	05		42	10.5	20.5	19
26741-06-06	9/16"X18	10	06		44	10.5	20.5	19
26741-08-06	3/4"X16	10	06		45	11	21.5	24
26741-08-08	3/4"X16	12	08		56.5	11	24	24
26741-10-08	7/8"X14	12	08		57.5	13	24.6	27
26741-10-10	7/8"X14	16	10		60	13	26	27
26741-10-12	7/8"X14	20	12		75.7	13	28.9	27
26741-12-08	1 1/16"X12	12	08		58	15	25.5	32
26741-12-10	1 1/16"X12	16	10		60.5	15	27	32
26741-12-12	1 1/16"X12	20	12		73.5	15	30	32
26741-14-12	1 3/16"X12	20	12		77.4	15	30	36
26741-16-12	1 5/16"X12	20	12		77.4	16	30	41
26741-16-16	1 5/16"X12	25	16		84	16	32.5	41
26741-20-20W	1 5/8"X12	32	20		95.9	17	35.2	50
26741-24-20W	1 7/8"X12	32	20		100.9	20	40.1	55
26741-24-24W	1 7/8"X12	40	24		114.8	20	44.1	55
26741-32-32T	2 1/2"X12	50	32		135.9	23.5	51.6	75

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 26742-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 26742-XX-XX.

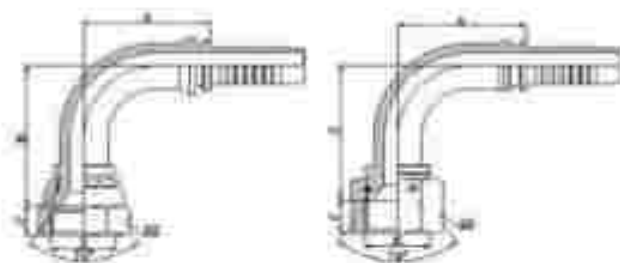

90° 美制 JIC 内螺纹
74° 内锥面 SAE J514
90° JIC FEMALE 74° CONE
SEAT

26791

26791-W

代 号	螺纹主	软 管			尺 寸			
		公称内径	标 号		A	C	H	S2
26791-04-03	7/16"X20	5	03		26.5	9	30.5	15
26791-04-04	7/16"X20	6	04		27.5	9	33	15
26791-05-04	1/2"X20	6	04		27.5	9.5	33.5	17
26791-05-05	1/2"X20	8	05		31	9.5	38.5	17
26791-05-06	1/2"X20	10	06		35.3	9.5	39.3	17
26791-06-04	9/16"X18	6	04		27.5	10.5	34.5	19
26791-06-05	9/16"X18	8	05		31	10.5	39	19
26791-06-06	9/16"X18	10	06		33	10.5	40	19
26791-06-08	9/16"X18	12	08		35.8	10.5	39.8	19
26791-08-06	3/4"X16	10	06		33	11	41.5	24
26791-08-08	3/4"X16	12	08		42.5	11	48.5	24
26791-08-10	3/4"X16	16	10		49	11	47.5	24
26791-10-08	7/8"X14	12	08		42.5	13	49.5	27
26791-10-10	7/8"X14	16	10		48.5	13	54	27
26791-10-12	7/8"X14	20	12		50.5	13	62	27
26791-12-08	1.1/16"X12	12	08		42.5	15	50.5	32
26791-12-10	1.1/16"X12	16	10		48.5	15	55	32
26791-12-12	1.1/16"X12	20	12		60.5	15	63	32
26791-12-16	1.1/16"X12	25	16		74	15	63.5	32
26791-14-12	1.3/16"X12	20	12		65.5	15	63.5	36
26791-16-12	1.5/16"X12	20	12		65.5	16	63.5	41
26791-16-16	1.5/16"X12	25	16		66	16	75.5	41
26791-20-20W	1.5/8"X12	32	20		91.5	17	80.5	50
26791-24-20W	1.7/8"X12	32	20		91.5	20	80.5	55
26791-24-24W	1.7/8"X12	40	24		109.4	20	94	55
26791-32-32T	2.1/2"X12	50	32		133.1	23.5	121.8	75

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 26792-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 26792-XX-XX.

26791K

90° 美制短身 JIC 内螺纹

74° 内锥面 SAE J514

90° JIC COMPACT FEMALE 74° CONE SEAT

代 号	螺纹 E	软 管		尺 寸				
		公称内径	标 号	A	C	H	S1	S2
26791K-04-04	7/16"X20	6	04	17.5	9	18	11	15
26791K-06-04	9/16"X18	6	04	20	10.5	20.5	14	19
26791K-06-06	9/16"X18	10	06	20	10.5	20.5	16	19
26791K-08-06	1/4"X16	10	06	23	11	25	19	24
26791K-08-08	1/4"X16	12	08	23.5	11	25	22	24
26791K-10-08	7/8"X14	12	08	25	13	27	22	27
26791K-10-10	7/8"X14	16	10	25	13	27	22	27
26791K-12-12	1 1/16"X12	20	12	29	15	31	27	32
26791K-16-16	1 5/16"X12	25	16	43	16	34.3	33	41

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 26792K-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 26792K-XX-XX.



17811


美制 SAE 外螺纹 90° 外锥面

SAE MALE 90° CONE

代 号	螺纹 E	软 管			尺 寸			
		公称内径	标 号		A	C	S1	
17811-04-04	7/16"X20	6	04		25.5	12.7	12	
17811-05-05	1/2"X20	8	05		27	14.2	14	
17811-06-06	5/8"X18	10	06		28.5	15.7	17	
17811-08-08	3/4"X16	12	08		34	19	22	
17811-10-10	7/8"X14	16	10		38.5	22.4	24	
17811-12-12	1 1/16"X14	20	12		44	25.4	30	

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 17812-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 17812-XX-XX.

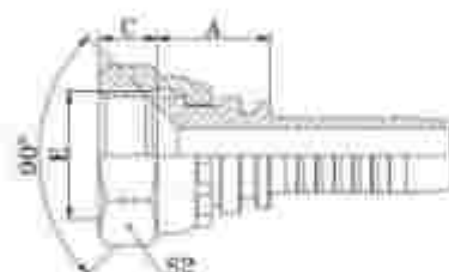

27811

美制 SAE 内螺纹


90° 内锥面 SAE J513

SAE FEMALE 90° CONE SEAT

代 号	螺纹 E	软 管			尺 寸			
		公称内径	标 号		A	C	S2	
27811-04-03	7/16"X20	5	03		14	9	15	
27811-04-04	7/16"X20	6	04		15	9	15	
27811-05-05	1/2"X20	8	05		16	9.5	17	
27811-06-04	5/8"X18	6	04		17	11.3	22	
27811-06-05	5/8"X18	8	05		17	11.3	22	
27811-06-06	5/8"X18	10	06		17	11.3	22	
27811-08-08	3/4"X16	12	08		18.5	11	24	
27811-10-08	7/8"X14	12	08		18.5	13	27	
27811-10-10	7/8"X14	16	10		20.5	13	27	
27811-12-12	1 1/16"X14	20	12		21.5	14.3	32	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 27812-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 27812-XX-XX.

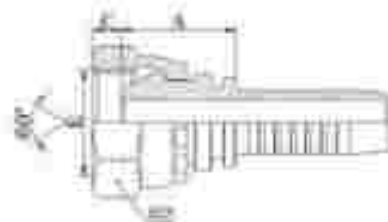


21611

美制 NPSM 内螺纹
NPSM FEMALE 60° CONE
60° 外锥面 SAE J514

代 号	螺 纹 E	软 管			尺 寸			
		公称内径	标 号		A	B	S2	
21611-04-04	1/4"X18	6	04		18	4.6	19	
21611-04-06	1/4"X18	10	06		19	4.6	19	
21611-06-04	3/8"X18	6	04		19	6	22	
21611-06-05	3/8"X18	8	05		19	6	22	
21611-06-06	3/8"X18	10	06		19	6	22	
21611-08-08	1/2"X14	12	08		21.5	7.5	27	
21611-12-10	3/4"X14	16	10		24	8.9	32	
21611-12-12	3/4"X14	20	12		24	8.9	32	
21611-16-12T	1"X11.5	20	12		25	10.5	41	
21611-16-16	1"X11.5	25	16		27	10.5	41	
21611-20-20W	1.1/4"X11.5	32	20		29.5	11.2	50	
21611-24-24W	1.1/2"X11.5	40	24		29.5	11.2	55	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 21612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 21612-XX-XX.

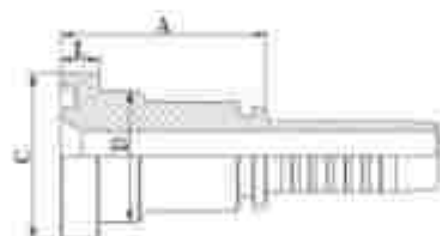

87312

SAE 法兰 3000PSI

SAE FLANGE 3000 PSI

ISO 12151-3—SAE J516

代 号	法兰型号	软 管			尺 寸			
		公称内径	标 号		A	C	D	L
87312-08-08	1/2"	12	08		45.5	30.2	24	6.73
87312-12-08	3/4"	12	08		47.5	38.1	31.7	6.73
87312-12-10	3/4"	16	10		49	38.1	31.7	6.73
87312-12-12	3/4"	20	12		48.5	38.1	31.7	6.73
87312-12-16	3/4"	25	16		49	38.1	31.7	6.73
87312-16-12	1"	20	12		51	44.4	38	8
87312-16-16	1"	25	16		48	44.4	38	8
87312-16-20	1"	32	20		53	44.4	38	8
87312-20-16	1 1/4"	25	16		57	50.8	43	8
87312-20-20	1 1/4"	32	20		56	50.8	43	8
87312-24-20	1 1/2"	32	20		68	60.3	50	8
87312-24-24	1 1/2"	40	24		74	60.3	50	8
87312-32-24	2"	40	24		70	71.4	62	9.53
87312-32-32	2"	50	32		70	71.4	62	9.53
87312-40-40	2 1/2"	64	40		76	84.1	74	9.53

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 87312-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 87312-XX-XX.




87342

45° SAE 法兰 3000PSI
45°SAE FLANGE 3000 PSI
ISO 12151-3—SAE J516

代 号	法兰型号	软 管			尺 寸				
		公称内径	标 号		A	C	D	H	L
87342-08-08	1/2"	12	08		56.5	30.2	24	23.5	6.73
87342-12-08	3/4"	12	08		58.9	38.1	31.7	24	6.73
87342-12-10	3/4"	16	10		69.9	38.1	31.7	25.3	6.73
87342-12-12	3/4"	20	12		73.5	38.1	31.7	29.5	6.73
87342-16-12	1"	20	12		76.3	44.4	38	28.9	8
87342-16-16	1"	25	16		83	44.4	38	31	8
87342-16-20	1"	32	20		94.5	44.4	38	33.8	8
87342-20-16	1.1/4"	25	16		82	50.8	43	30.5	8
87342-20-20	1.1/4"	32	20		95	50.8	43	36	8
87342-24-20	1.1/2"	32	20		95.9	60.3	50	35.2	8
87342-24-24	1.1/2"	40	24		108	60.3	50	42	8
87342-32-24	2"	40	24		109.9	71.4	62	39.1	9.53
87342-32-32	2"	50	32		129.3	71.1	62	43	9.53

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 87342-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 87342-XX-XX.

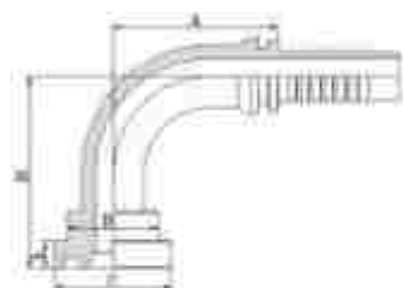


87392

90° SAE 法兰 3000PSI
90°SAE FLANGE 3000 PSI
ISO 12151-3—SAE J516

代 号	法兰型号	软管			尺 寸				
		公称内径	标 号		A	C	D	H	L
87392-08-08	1/2"	12	08		42.5	30.2	24	48	6.73
87392-12-08	3/4"	12	08		42.5	38.1	31.7	50	6.73
87392-12-10	3/4"	16	10		56	38.1	31.7	52.5	6.73
87392-12-12	3/4"	20	12		60.5	38.1	31.7	62.5	6.73
87392-12-16	3/4"	25	16		76.7	38.1	31.7	67.5	6.73
87392-16-12	1"	20	12		65.5	44.4	38	62	8
87392-16-16	1"	25	16		66	44.4	38	74	8
87392-16-20	1"	32	20		91.5	44.4	38	78.5	8
87392-20-16	1.1/4"	25	16		76.7	50.8	43	67.5	8
87392-20-20	1.1/4"	32	20		75	50.8	43	80	8
87392-20-24	1.1/4"	40	24		107	50.8	43	78.5	8
87392-24-20	1.1/2"	32	20		75	60.3	50	90	8
87392-24-24	1.1/2"	40	24		89	60.3	50	102	8
87392-32-24	2"	40	24		109.4	71.4	62	94	9.53
87392-32-32	2"	50	32		115.5	71.4	62	129.5	9.53
87392-40-40	2.1/2"	64	40		131.8	84.1	74.4	116.3	9.53

注: 1. 上述代号用于编制软管。 2. 如需用于螺旋软管代号改为 87392-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 87392-XX-XX.

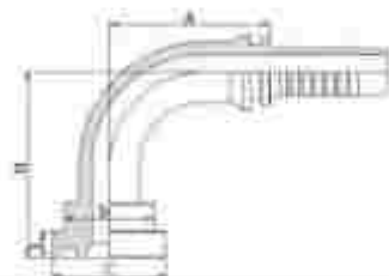

87392-H

90° SAE 法兰 3000PSI

90°SAE FLANGE SPECIAL HEIGHT


代 号	法兰型号	软 管			尺 寸				
		公称内径	标 号		A	C	D	H	L
87392-12-12(H100)	3/4"	20	12		65.5	38.1	32	90	6.73
87392-12-12(H100)	3/4"	20	12		65.5	38.1	32	100	6.73
87392-12-12(H127)	3/4"	20	12		65.5	38.1	32	127	6.73
87392-12-12(H150)	3/4"	20	12		65.5	38.1	32	150	6.73
87392-16-16(H100)	1"	25	16		76.7	44.4	38	100	8
87392-16-16(H127)	1"	25	16		76.7	44.4	38	127	8
87392-16-16(H150)	1"	25	16		76.7	44.4	38	150	8
87392-20-20(H100)	1 1/4"	32	20		91.5	50.8	43	100	8
87392-20-20(H127)	1 1/4"	32	20		91.5	50.8	43	127	8
87392-20-20(H150)	1 1/4"	32	20		91.5	50.8	43	150	8
87392-24-24(H127)	1 1/2"	40	24		109.4	50.8	50	127	8

FL 3000 PSI HALF FLANGE

FS 6000 PSI HALF FLANGE

SAE 对开法兰夹

代 号	法兰型号		尺 寸							压力等级 Mpa
			A	B	D	H	M	N		
3000PSI										
FL-08	1/2"		54	45.6	9	6.2	38.1	17.5	M8X25	34.5
FL-12	3/4"		65	51.8	11	6.2	47.6	22.2	M10X30	
FL-16	1"		70	58.4	11	7.5	52.4	26.2	M10X30	
FL-20	1.1/4"		79	72.6	11	7.5	58.7	30.5	M10X30	27.6
FL-24	1.1/2"		91	82.2	13.5	7.5	69.9	35.7	M12X35	20.7
FL-32	2"		102	96.4	13.5	9	77.8	42.9	M12X35	
FL-40	2.1/2"		114	108.2	13.5	9	88.9	50.8	M12X40	17.2
FL-48	3"		135	130.6	17.5	9	106.4	61.9	M16X50	13.8
6000PSI										
FS-08	1/2"		56	47.2	9	7.2	40.5	18.2	M8X30	42
FS-12	3/4"		71	60	11	8.2	50.8	23.8	M10X35	
FS-16	1"		81	69.6	13.5	9	57.2	27.8	M12X45	
FS-20	1.1/4"		95	77.2	13.5	9.8	66.6	31.8	M12X45	
FS-24	1.1/2"		113	95	17.5	12	79.3	36.5	M16X55	
FS-32	2"		133	113.8	22	12	96.8	44.5	M20X70	

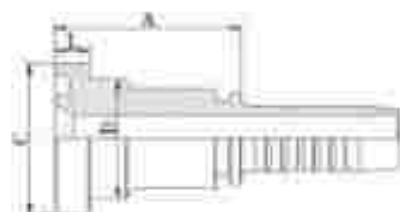

87612

SAE 法兰 6000PSI

SAE FLANGE 6000 PSI

ISO 12151-3—SAE J516

代 号	法兰型号	规 格			尺 寸				
		公称内径	标 号		A	C	D	L	
87612-08-08	1/2"	12	08		47.5	31.7	24	7.75	
87612-12-10	3/4"	16	10		50.5	41.3	32	8.76	
87612-12-12	3/4"	20	12		51.5	41.3	32	8.76	
87612-16-12	1"	20	12		56	47.6	38	9.53	
87612-16-16	1"	25	16		52.5	47.6	38	9.53	
87612-16-20	1"	32	20		61	47.6	38	9.53	
87612-20-16	1 1/4"	25	16		63	54	44	10.29	
87612-20-20	1 1/4"	32	20		62	54	44	10.29	
87612-24-20	1 1/2"	32	20		75	63.5	51	12.57	
87612-24-24	1 1/2"	40	24		79	63.5	51	12.57	
87612-32-24	2"	40	24		85	79.4	67	12.57	
87612-32-32	2"	50	32		79	79.4	67	12.57	

注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 87612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 87612-XX-XX.



87642

45° SAE 法兰 6000PSI


45° SAE FLANGE 6000 PSI

ISO 12151-3—SAE J516

代 号	法兰规格	软 管			尺 寸				
		公称通径	标 号		A	C	D	H	L
87642-08-08	1/2"	12	08		57.5	31.7	24	25	7.75
87642-08-12	1/2"	20	12		77	31.7	24	29.6	7.75
87642-12-10	3/4"	16	10		72.5	41.3	32	28.2	8.76
87642-12-12	3/4"	20	12		75.5	41.3	32	32	8.76
87642-16-16	1"	25	16		86	47.6	38	34	9.53
87642-20-20	1 1/4"	32	20		100	54	44	40	10.29
87642-24-20	1 1/2"	32	20		105.8	63.5	51	45.1	12.57
87642-24-24	1 1/2"	40	24		112	63.5	51	46	12.57
87642-32-24	2"	40	24		125.4	70.4	67	54.7	12.57
87642-32-32	2"	50	32		143	76.4	67	49	12.57

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 87642-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 87642-XX-XX.

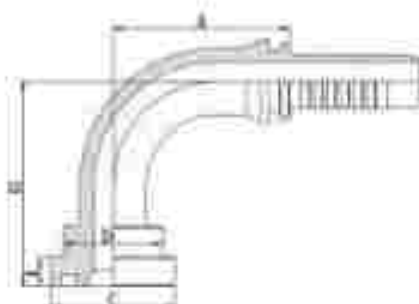

87692

90° SAE 法兰 6000PSI

90° SAE FLANGE 6000 PSI

ISO 12151-3—SAE J516

代 号	法兰型号	软管			尺 寸				
		软管口径	标 号		A	C	D	E	L
87692-08-08	1/2"	12	08		42.5	31.7	24	50	7.75
87692-12-10	3/4"	16	10		56	41.3	32	56.5	8.76
87692-12-12	3/4"	20	12		50.5	41.3	32	65.5	8.76
87692-16-12	1"	20	12		65.5	47.6	38	69	9.53
87692-16-16	1"	25	16		66	47.6	38	78	9.53
87692-16-20	1"	32	20		91.5	47.6	38	83.5	9.53
87692-20-16	1 1/4"	25	16		76.7	54	44	78.5	10.29
87692-20-20	1 1/4"	32	20		75	54	44	92	10.29
87692-24-20	1 1/2"	32	20		91.5	63.5	51	94.5	12.57
87692-24-24	1 1/2"	40	24		89	63.5	51	102	12.57
87692-32-24	2"	40	24		109.4	79.4	67	116	12.57
87692-32-32	2"	50	32		115.5	79.4	67	136.5	12.57

注: 1. 上述代号用于编制软管。 2. 如需用于螺旋软管代号改为 87692-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 87692-XX-XX.



18611


日本公制外螺纹 60° 外锥面

JIS METRIC MALE 60° CONE SEAT

代 号	规格	规 格			尺 寸			
		公称内径	标 号		A	B	S1	
18611-14-04	M14X1.5	6	04		29.5	17	17	
18611-16-04	M16X1.5	6	04		30.5	18	17	
18611-16-06	M16X1.5	10	06		30.5	18	17	
18611-18-06	M18X1.5	10	06		30.5	18	19	
18611-20-08	M20X1.5	12	08		35	20	22	
18611-22-08	M22X1.5	12	08		35.5	20	24	
18611-24-10	M24X1.5	16	10		39.5	21.5	27	
18611-30-12	M30X1.5	20	12		45.5	26	32	
18611-33-16	M33X1.5	25	16		50.5	30	36	
18611-36-20	M36X1.5	32	20		56.5	32	38	
18611-42-24	M42X1.5	40	24		59.5	36	46	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 18612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 18612-XX-XX.

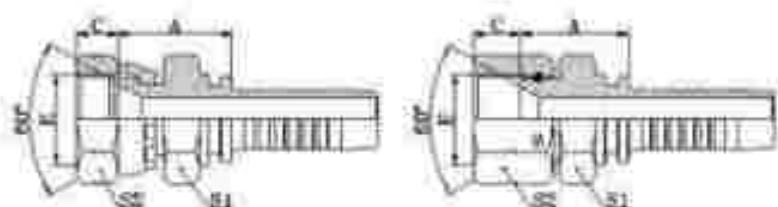

日本公制内螺纹 60° 内锥面
JIC METRIC FEMALE 60°
CONE SEAT


28611

28611-W

代 号	螺纹	尺 寸			尺 寸			
		公称内径	标 号		A	B	S1	S2
28611-12-14	M12X1.5	6	04		20	9	17	17
28611-14-04W	M14X1.5	8	04		23	10.5	19	19
28611-14-06	M14X1.5	10	06		21	10.5	19	19
28611-16-04	M16X1.5	6	04		24	10	22	22
28611-16-08	M16X1.5	8	05		24	10	22	22
28611-16-06	M16X1.5	10	06		24	10	22	22
28611-18-06	M18X1.5	10	06		24	11.5	24	24
28611-18-08	M18X1.5	12	08		24.5	11.5	24	24
28611-20-08	M20X1.5	12	08		28.5	12	27	27
28611-22-08	M22X1.5	12	08		25.5	14	27	27
28611-24-08	M24X1.5	12	08		27.5	13	32	32
28611-24-10	M24X1.5	16	10		28	13	32	32
28611-30-12	M30X1.5	20	12		28.5	18.3	36	36
28611-35-12	M33X1.5	20	12		31	21.3	41	41
28611-37-16	M33X1.5	25	16		32	21.3	41	41
28611-36-20	M36X1.5	32	20		35.5	20	46	46
28611-42-24W	M42X1.5	40	24		36	18.8	55	55

注: 1. 上述代号用于编制软管。 2. 如需用于螺旋软管代号改为 28612-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 28612-XX-XX.

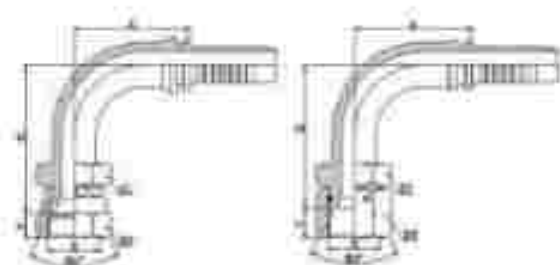

90° 日本公制内螺纹 60° 内锥面
90° JIS METRIC FEMALE 60° CONE SEAT

28691

28691-W

代 号	螺纹E	软 管			尺 寸				
		公称内径	标 号		A	B	H	S1	S2
28691-14-04W	M14X1.5	6	04		30	10.5	40	19	19
28691-14-06	M14X1.5	10	06		35.3	10.5	43.3	19	19
28691-16-05	M16X1.5	8	05		33	10	44	22	22
28691-18-06	M18X1.5	10	06		35.3	11.5	46.3	24	24
28691-22-08	M22X1.5	12	08		41	14	52.5	27	27
28691-24-10	M24X1.5	16	10		56	15	59	32	32
28691-30-12	M30X1.5	20	12		65.5	18.3	71.5	36	36
28691-33-16	M33X1.5	25	16		76.7	21.3	76	41	41
28691-36-20	M36X1.5	32	20		93	20	89	46	46
28691-42-24W	M42X1.5	40	24		109.4	18.8	108	55	55

注: 1. 上述代号用于编织软管。 2. 如用于缠绕软管代号改为 28692-XX-XX。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 28692-XX-XX.

19611

日本英制外螺纹 60° 外锥面

JIS GAS FEMALE 60° CONE SEAT



代 号	螺纹主	规 格			尺 寸				
		公称内径	标 号		A	B	SL		
19611-04-04	G1/4"X15	3	04		20	16	17		
19611-06-06	G3/8"X19	10	06		31	18	19		
19611-08-08	G1/2"X14	12	08		35.5	20	22		
19611-12-12	G3/4"X14	20	12		41	22	30		
19611-16-16	G1"X11	25	16		47.5	24	32		

注: 1. 上述代号用于编制软管; 2. 如需用于编制软管代号改为: 19612-xx-xx.

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 19612-XX-XX.



日本英制内螺纹 60° 内锥面

JIS GAS FEMALE 60° CONE SEAT
JIS B8363


29611

29611-W

代 号	螺纹主	规 格			尺 寸			
		公称内径	标 号		A	C	S1	S2
29611-02-03	G1/8"X28	5	03		20	7	14	14
29611-04-04	G1/4"X19	6	04		21	8	19	19
29611-04-05	G1/4"X19	8	05		21	8	19	19
29611-06-04	G3/8"X19	6	04		25	9	22	22
29611-06-06	G3/8"X19	10	06		25	9	22	22
29611-08-06	G1/2"X14	10	06		28	12	27	27
29611-08-08	G1/2"X14	12	08		28.5	12	27	27
29611-10-10	G5/8"X14	16	10		30.5	13.5	30	30
29611-12-10	G3/4"X14	16	10		30	13.5	32	32
29611-12-12	G3/4"X14	20	12		30.5	13.5	32	32
29611-16-16	G1"X11	25	16		32	16	41	41
29611-20-20W	G1 1/4"X11	32	20		43	18.5	50	50
29611-24-24W	G1 1/2"X11	40	24		47.5	19	55	55
29611-32-32W	G2"X11	50	32		46.5	21	70	70

注: 1. 上述代号用于编制软管; 2. 如需用于编制软管代号改为: 29612-xx-xx.

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 29612-XX-XX.

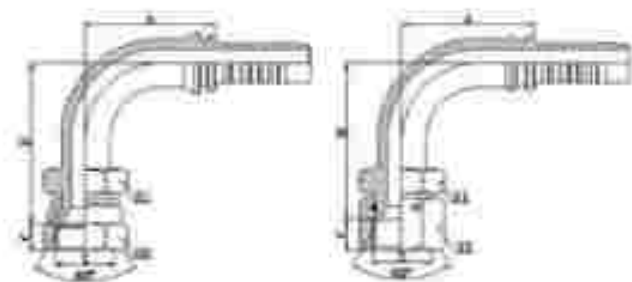

90° 日本英管内螺纹
60° 内锥面 JIS B8363
90° JIS GAS FEMALE 60°
CONE SEAT


29691

29691-W

代 号	螺纹E	软管			尺 寸				
		公称内径	标 号		A	C	H	S1	S2
29691-04-04	G1/4"X19	6	04		30	8	38	19	19
29691-04-05	G1/4"X19	8	05		34	8	41	19	19
29691-06-06	G3/8"X19	10	06		35.6	9	45.8	22	22
29691-08-08	G1/2"X14	12	08		41	12	53	27	27
29691-10-10	G5/8"X14	16	10		56.5	11.5	61	30	30
29691-12-12	G3/4"X14	20	12		65.5	13.5	69	32	32
29691-16-16	G1"X11	25	16		76.7	16	76.5	41	41
29691-20-20W	G1 1/4"X11	32	20		91.5	18.5	92.5	50	50
29691-24-24W	G1 1/2"X11	40	24		109.4	19	110.5	55	55
29691-32-32W	G2"X11	50	32		131.8	23	133.8	70	70

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 29692-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS
SERIES NUMBER IS 29692-XX-XX.

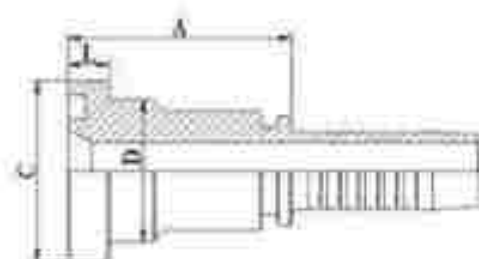

日制法兰 88111

JIS FLANGE

代 号	螺纹	规 格			尺 寸				
		公称内径	标 号		A	C	D	E	
88111-10-08	5/8"	12	08		43	34.2	27.8	6.7	
88111-10-10	5/8"	16	10		45.5	34.2	27.8	6.7	
88111-10-12	5/8"	20	12		46	34.2	27.8	6.7	

注 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 88112-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 88112-XX-XX.



88141

45° 日制法兰
45° JIS FLANGE

代 号	螺纹	规 格			尺 寸				
		公称内径	标 号		A	C	D	E	L
88141-10-08	5/8"	12	08		58.9	34.2	27.8	24	6.7
88141-10-10	5/8"	16	10		69.8	34.2	27.8	25.3	6.7
88141-10-12	5/8"	20	12		76.3	34.2	27.8	26.9	6.7

注 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 88142-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 88142-XX-XX.




88191
90° 日制法兰
90° JIS FLANGE

代 号	螺纹	规 格			尺 寸				
		公称内径	标 号		A	C	D	H	L
88191-16-08	5/8"	12	08		41	34.2	27.8	48	6.7
88191-16-10	5/8"	16	10		56	34.2	27.8	82.3	6.7
88191-16-12	5/8"	20	12		66.2	34.2	27.8	82	6.7

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 88192-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 88192-XX-XX.

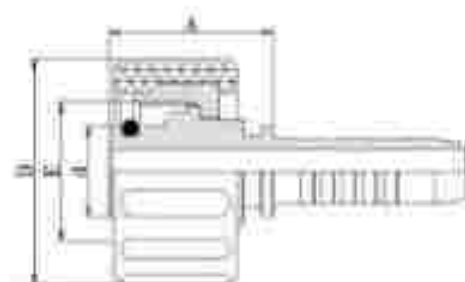


20011-ST
公制内螺纹高压水管
METRIC FEMALE WATERWASH INSERTS

代 号	螺纹	规 格			尺 寸			
		公称内径	标 号		A	d	D	
20011-22-03ST	M22X1.5	5	03		24.5	14	34.5	
20011-22-04ST	M22X1.5	6	04		25	14	34.5	
20011-22-05ST	M22X1.5	8	05		25	14	34.5	
20011-22-06ST	M22X1.5	10	06		25	14	34.5	

注: 1. 上述代号用于编织软管。 2. 如需用于缠绕软管代号改为 20012-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 20012-XX-XX.

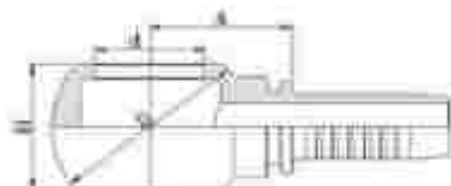


70011
公制铰接体
METRIC BANJO
DIN 7642

代 号	螺纹 E	软 管			尺 寸			
		公称内径	标 号		A	d	D	H
70011-10-03	M10X1	5	03		14.5	10.1	17	10
70011-10-04	M10X1	6	04		17	10.1	17	10
70011-12-04	M12X1.5	6	04		20.5	12.1	20	12
70011-12-05	M12X1.5	8	05		20.5	12.1	20	12
70011-12-06	M12X1.5	10	06		20.5	12.1	20	12
70011-14-04	M14X1.5	6	04		19	14.1	24	14
70011-14-05	M14X1.5	8	05		19	14.1	24	14
70011-14-06	M14X1.5	10	06		21	14.1	24.7	14
70011-16-04	M16X1.5	6	04		20.5	16.1	28	16
70011-16-05	M16X1.5	8	05		20.5	16.1	28	16
70011-16-06	M16X1.5	10	06		20.5	16.1	28	16
70011-18-04	M18X1.5	6	04		23	18.1	32	20
70011-18-05	M18X1.5	8	05		24	18.1	32	20
70011-18-06	M18X1.5	10	06		24	18.1	32	20
70011-18-08	M18X1.5	12	08		24.5	18.1	32	20
70011-22-06	M22X1.5	10	06		28.1	22.1	39	25
70011-22-08	M22X1.5	12	08		28.5	22.1	39	25
70011-22-10	M22X1.5	16	10		27.5	22.1	39	25
70011-26-12	M26X1.5	20	12		30.5	26.1	46	30
70011-30-16	M30X1.5	25	16		37	30.1	54	36
70011-30-20	M30X1.5	32	20		41	30.1	54	36


注: 1. 上述代号用于编制软管。 2. 如需用于缠绕软管代号改为 70012-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES. 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 70012-XX-XX.

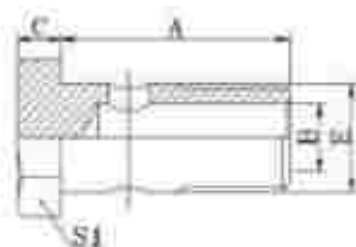

700M
公制铰接螺栓
METRIC BOLT
DIN 7643

代 号	螺 纹 规 格				尺 寸			
					A	B	C	S1
700M-10	M10X1				19	4	6	14
700M-12	M12X1.5				24	6	6	17
700M-14	M14X1.5				26	8	7	19
700M-16	M16X1.5				28	9	7.5	22
700M-18	M18X1.5				32	11	8	24
700M-22	M22X1.5				39	14	9	27
700M-26	M26X1.5				45	18	10	32
700M-30	M30X1.5				51	22	11	36

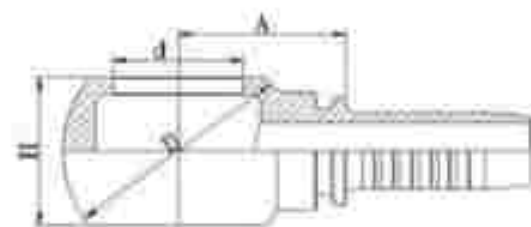


72011
英制铰接体
BSP-BANJO

代 号	螺纹 E	软 管			尺 寸			
		公称内径	标 号		A	d	D	H
72011-02-03	G1/8"X28	5	03		18	9.9	24	16
72011-02-04	G1/8"X28	6	04		18.5	9.9	24	16
72011-04-03	G1/4"X19	5	03		19	13.3	24	15
72011-04-04	G1/4"X19	6	04		19.5	13.3	24	15
72011-04-05	G1/4"X19	8	05		19.5	13.3	24	15
72011-04-06	G1/4"X19	10	06		19.5	13.3	24	15
72011-06-04	G3/8"X19	6	04		22	16.7	29	20
72011-06-05	G3/8"X19	8	05		22	16.7	29	20
72011-06-06	G3/8"X19	10	06		22	16.7	29	20
72011-06-08	G3/8"X19	12	08		23	16.7	29	20
72011-08-05	G1/2"X14	8	05		27.5	21	38	25
72011-08-06	G1/2"X14	10	06		27.5	21	38	25
72011-08-08	G1/2"X14	12	08		28	21	38	25
72011-08-10	G1/2"X14	16	10		29	21	38	25
72011-10-10	G5/8"X14	16	10		28	23	40	27
72011-12-10	G3/4"X14	16	10		32	26.5	48	31
72011-12-12	G3/4"X14	20	12		32	26.5	48	31
72011-16-08	G1"X11	12	08		40	33.3	60	42
72011-16-12	G1"X11	20	12		40	33.3	60	42
72011-16-16	G1"X11	25	16		41	33.3	60	42

注: 1. 上述代号用于编织软管。 2. 如需用于螺旋软管代号改为 72012-xx-xx。

NOTE: 1. FOR USE WITH BRAIDED HOSES 2. IF USE WITH SPIRAL HOSES, HOSE FITTINGS SERIES NUMBER IS 72012-XX-XX.

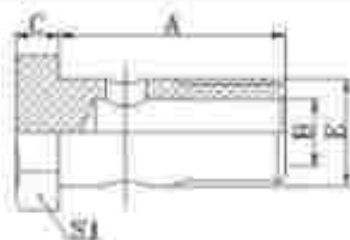

720B

英制铰接螺栓

BSP BOLT

代 号	规格			尺 寸			
				A	B	C	S1
720B-02	G1/8"X28			29.5	4.8	4.8	14
720B-04	G1/4"X19			28.5	6	6	19
720B-06	G3/8"X19			38.5	9	7	22
720B-08	G1/2"X14			44	13	8.5	27
720B-10	G3/8"X14			48.5	15	10	30
720B-12	G3/4"X14			56	18	10	32
720B-16	G1"X11			66.5	22	13	41



90011

双面连接芯

DOUBLE CONNECTOR

代 号		数 量			尺 寸			
		芯数/芯径	每 号			L		
90011-04		6	04			69		
90011-05		8	05			89		
90011-06		10	06			73		
90011-08		12	08			77		
90011-10		16	10			89		
90011-12		20	12			96		
90011-16		25	16			114		
90011-20		32	20			132		
90011-24		40	24			162		
90011-32		50	32			170		

① 用于编织软管。NOTE: FOR WIRE BRAID HOSE.

90012

双面连接芯

DOUBLE CONNECTOR



代 号		规 格			尺 寸			
		软管内径	标 号			L		
90012-04		6	04			83		
90012-05		8	05			87		
90012-06		10	06			87		
90012-08		12	08			91		
90012-10		16	10			97		
90012-12		20	12			111		
90012-16		25	16			134		
90012-20		32	20			153		
90012-24		40	24			172		
90012-32		50	32			178		

注:用于螺旋软管, NOTE FOR SPIRAL HOSE.