

ATC GROUPS

THE BEST INDUSTRIAL EQUIPMENT

PVC HOSE



PVC FIBER REINFORCED HOSE

用途：

●工业、农业、渔业、建筑及家居等普通设备供水、气、油

特征：

●柔软、透明、无毒无味、抗拉伸、耐腐蚀、耐老化、耐气候佳、耐负压能力好、弯曲半径小，耐磨

APPLICATIONS :

●Supplying water, gas, oil petrol under normal working condition in factory, farm, ship, building and family.

CHARACTERISTICS :

●Its flexible, transparent durable, non-toxic, odourless, stretching resistand, ageing resistand and good adaptability to hard weather condition and minus pressure, small bending radius, anti-abrasion.



食品级纤维增强软管

食品级符合欧盟REACH和美国FDA标准，可用于输送各种食品。

FOOD GARDE FIBER REINFORCED HOSE

food grade hose can be used for conveying various food, which meets the REACH standard&food standard



耐高温纤维增强软管

耐高温等级可在120摄氏度的温度下正常使用

HIGH TEMPERATURE RESISTANT HOSE

High temperature resistant hose can be used under the 120 degree condition



耐低温纤维增强软管

耐低温等级，管子可在零下40摄氏度情况下保持其柔软性

LOW TEMPERATURE RESISTANT HOSE

Low temperature resistant hose can maintain its good flexibility under the -40degree condition

PVC FIBER REINFORCED HOSE

英制尺寸	公制尺寸			重量	常用压力 W.P.MPa	爆破压力 B.P.MPa	包装尺寸 cm			体积
Inch	内径 IDmm	外径 O.Dmm	长度m/roll	Kg/roll	At23℃		内径ID	外径OD	高度cm	m³
13/64"	5	9	170	10	0.8	2.5	15	39	12	0.018
1/4"	6	10	150	10	1.0	3.0	15	41	12	0.020
		11	110	10			15	40	12	0.019
		12	88	10			15	38	11	0.016
		12	118	10			15	43	14	0.026
5/16"	8	13	90	10	1.0	3.0	15	44	13	0.025
		14	72	10			15	42	13	0.023
		13	108	10			15	44	13	0.025
3/8"	9	14	83	10	0.9	2.7	15	43	12	0.022
		10	14	100			15	44	14	0.027
13/32"	10	15	75	10	0.8	2.4	15	43	13	0.024
		16	60	10			15	42	13	0.023
		12	16	170			25	62	20	0.077
1/2"	12	17	130	20	0.7	2.1	25	60	20	0.072
		18	105	20			25	55	18	0.054
	13	17	160	20	0.9	2.7	25	62	20	0.077
		18	124	20			25	60	20	0.072
	13	18	100	20	0.6	1.8	25	60	20	0.072
		19	100	20			25	59	18	0.063
35/64"	14	19	115	20	0.7	2.1	25	56	21	0.066
		20	93	20			25	57	18	0.058
5/8"	15	20	108	20	0.7	2.1	25	63	19	0.075
		20	131	20			25	63	20	0.079
	16	21	100	20	0.5	1.5	25	64	19	0.078
		22	83	20			25	59	18	0.063
45/64"	18	24	75	20	0.6	1.8	25	57	19	0.062
3/4"	19	24	88	20			25	67	16	0.072
	19	25	70	20	0.7	2.1	25	62	13	0.050
	19	26	60	20			25	55	20	0.061
25/32"	20	25	84	20	0.6	1.8	25	61	18	0.067
	20	26	68	20			25	57	21	0.068
	20	27	56	20	0.7	2.1	25	56	20	0.063
	20	28	50	20			25	56	20	0.063
7/8"	22	27	75	20	0.5	1.5	25	56	20	0.063
	22	28	63	20	0.6	1.8	25	64	21	0.086
1"	25	30	69	20	0.4	1.2	25	68	20	0.092
	25	31	56	20			25	67	18	0.081
	25	32	47	20	0.5	1.5	25	62	20	0.077
	25	33	40	20			25	60	18	0.065
1-1/4"	32	39	57	30	0.4	1.2	40	80	27	0.173
	32	40	49	30			44	80	24	0.154
	32	42	37	30			28	66	21	0.091
1-1/2"	38	46	42	30	0.5	1.5	40	88	20	0.155
	38	48	31	30			40	75	22	0.124
1-3/4"	45	55	47	50	0.4	1.2	42	87	22	0.167
2"	50	59	48	50	0.4	1.2	57	102	30	0.312
	50	60	43	50			55	95	30	0.271
	50	62	35	50			55	94	30	0.265
2-1/2"	64	78	23	50	0.4	1.2	77	110	23	0.278
3"	75	90	20	50	0.4	1.2	98	115	30	0.39

其它规格软管可根据客户要求订做 Other specifications of the hose can be customized according to customer requirements.

PVC NON-TORSION GARDEN HOSE

用途:

适用于各种园林浇灌, 车辆冲洗以及社区厂矿, 家庭清洗, 是输送空气, 水, 油类及其他液、气体的良好软管。

特征:

采用优质材料, 独特的钩编工艺加工而成, 比普通软管更抗扭曲, 柔软且如有弹性, 颜色鲜艳亮丽, 耐压, 耐候性好, 使用寿命长, 管面可带彩色线条, 更加美观。

工作温度: -5°C – 65°C



Application:

Being widely used for irrigation and washing in the parks, community, factories and families. It's the ideal hose in conveying air, water, oil and other liquid, etc.

Characteristics:

Being made from good quality pvc materials and by unique knitting technology, which can prevent the hose from twisting, its colorful, elastic, non-torsion and adaptable to high pressure and hard weather conditions. by adding colorful symbol lined on the surface of the hose, it looks more beautiful.


Working temperature: -5°C – 65°C

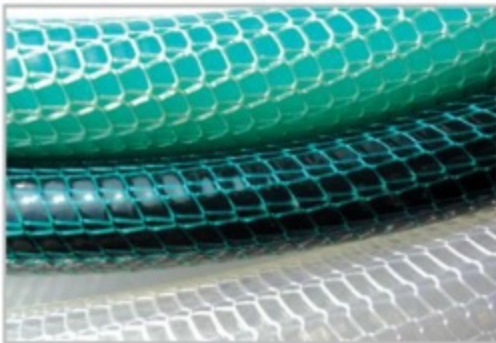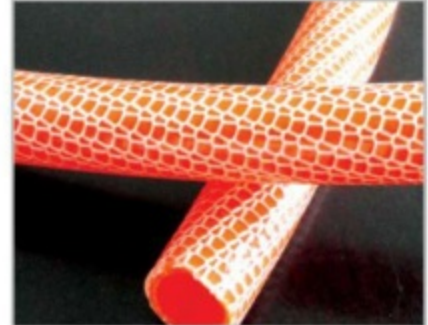

英制尺寸	公制尺寸		长度	工作压力	爆破压力	重量
	内径	外径		W.P	B.P	
Inch	I.D.mm	O.D.mm	M/ROLL	At 23°C		kg/roll
				Bar	Bar	
1/2	12	17	15	8	24	2.3
			25			3.7
			50			7.5
5/8	15	22	15	7	21	4.1
			25			6.7
			50			13.5
3/4	19	25	25	6	18	6.9
			50			14
1	25	31	25	5	16	8.9
			50			17.5
1-1/4	32	38	50	4	12	21.2

其它规格软管可根据客户要求订做 Other specifications of the hose can be customized according to customer requirements

PVC NON- TORSION HIGH- INTENSITY POLYESTER FIBER REINFORCED HOSE

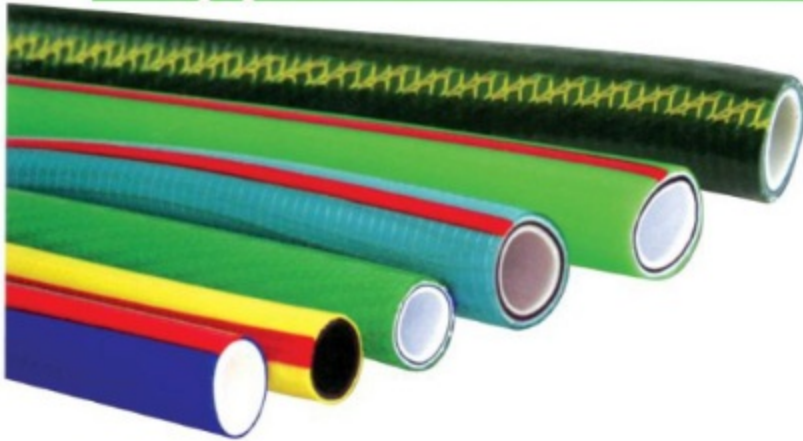

用途:

●适用于各种园林浇灌，车辆冲洗以及社区厂矿、家庭清洗，是输送空气、水、油类及其它液、气体的良好软管。

特征:


●采用优质材料，独特的钩编工艺加工而成，比普通更抗扭曲，柔软且富有弹性。颜色鲜艳亮丽、耐压、耐候性好，使用寿命长，管面可带彩色线条，更加美观。

工作温度：-5℃-65℃



英制尺寸	公制尺寸		长度	工作压力W.P	爆破压力B.P	重量
	内径	外径		At23℃		
				Bar	Bar	
Inch	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	kg/roll
1/2	12	17	15	8	25	2.3
			25			3.7
			50			7.5
5/8	15	22	15	7	20	4.1
			25			6.7
			50			13.5
3/4	19	25	25	6	18	6.9
			50			14
1	25	31	25	5	16	8.9
			50			17.5

其它规格的软管可根据客户要求订做 Other specifications of the hose can be customized according to customer requirements

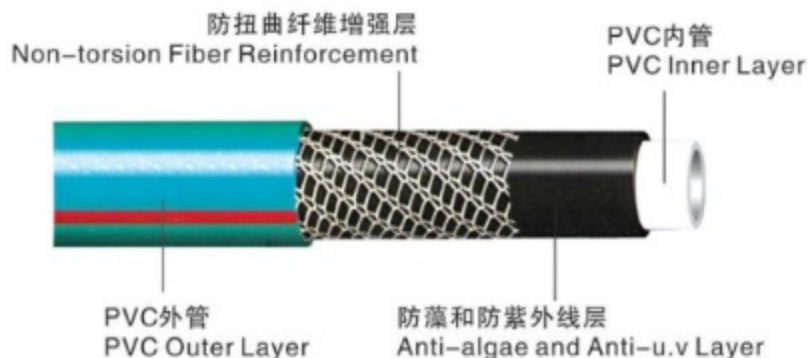

APPLICATIONS :

Being widely used for irrigation and washing in the parks,commu-nity,factories and families. It is the ideal hose in conveying air,water,oil and other liquid,etc.

CHARACTERISTICS:

Being made form good quality PVC material and byunique knitting technology which can prevent the hose from twisting,the hose is colorful,light,flexible,elastic,durablenon-torsion,and adapt-able to high pressure and hard weather conditions.

By adding the colorful symbol lines on the surface of the hose,itlooks more beautiful.

WORK TEMPERATURE:-5℃-65℃

PVC NON- TORSION HIGH- INTENSITY POLYESTER FIBER REINFORCED HOSE

用途:

●本产品是工业、农业、渔业、建筑及家居等普通设备供水、气、油和配套各类出口设备的理想管材。

特征:

●质轻、耐摩、耐压、抗拉伸、耐腐蚀、耐老化、外型美观，柔软轻便，管面可带彩色线条，更加美观。

工作温度: -5℃-65℃



APPLICATIONS :

The product is used for convey-ing water,oil,gas uner normal working conditios in the factory,farm,ship.building and family,and can be matched on some exported equipments.

CHARACTERISTICS:

It is flexible,durable,non-toxic,anti-erosion and adaptable to highpressure condition.


By adding the colorful symbol lines on the surface of the hose,itlooks more beautiful.

WORK TEMPERATURE:-5℃-65℃



英制尺寸	公制尺寸		长度	工作压力	爆破压力	重量
	内径	外径		W.P	B.P	
Inch	I.D.mm	O.D.mm	M/ROLL	At23℃		kg/roll
1/2	12	18	15	10	30	2.8
			25			4.7
			50			9.5
5/8	15	22	15	9	28	4.0
			25			6.7
			50			13.5
3/4	19	27	25	8	25	9.7
			50			19.4
1	25	33	25	7	20	12
			50			24.5

其它规格的软管可根据客户要求订做 Other specifications of the hose can be customized according to customer requirements

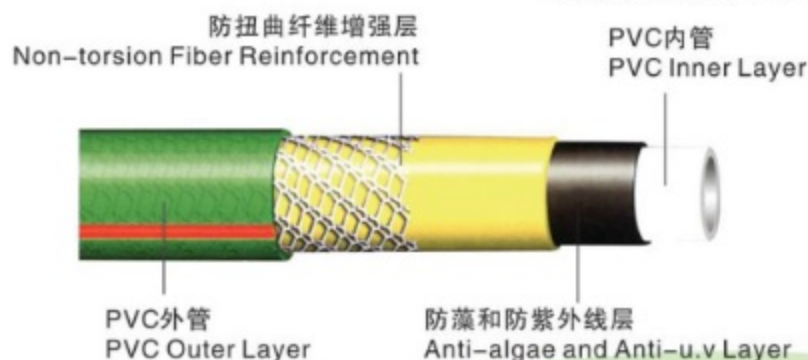

PVC SPECIALIZED AIR HOSE

用途:

●适用于启动装置、气体冲洗装置、压缩机、发动机配件、机械维修及土木工程设备

特征:

●采用韧性极强的PVC材料和高级拉力聚酯增强线制造工作压力高, 产品具有耐压、耐油、质轻、耐磨、耐老化、不易破裂等特征

APPLICATIONS:

●Be widely used in pneumatic tools, pneumatic washing apparatus, compressors, engine componts, machineservice and civil engineering equipments.

CHARACTERICTICS:

●Being made of tough pvc material and high-strength polyester filament.

Can work under very high working pressure Its light, flexible, durable, anti-erosion and explosion resistant.

英制尺寸	公制尺寸		长度	工作压力	爆破压力	重量
	内径	外径		W.P	B.P	
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/4"	6.5	12	100	20	80	100
1/4"	6.5	12.5	100	30	95	115
5/16"	8.5	14	100	20	80	130
5/16"	8.5	14.5	100	30	90	140
3/8"	10	16	100	20	80	160
1/2"	13	20	50	20	75	240
5/8"	16	25	50	20	60	380
3/4"	19	28.5	50	20	50	460
1"	25	34.5	50	15	45	580
1-1/4"	32	44	40	15	45	940
1-1/2"	38	50	40	15	40	1085
2"	50	64	40	15	30	1640

其它规格的软管可根据客户要求订做 Other specifications of the hose can be customized according to customer requirements

